
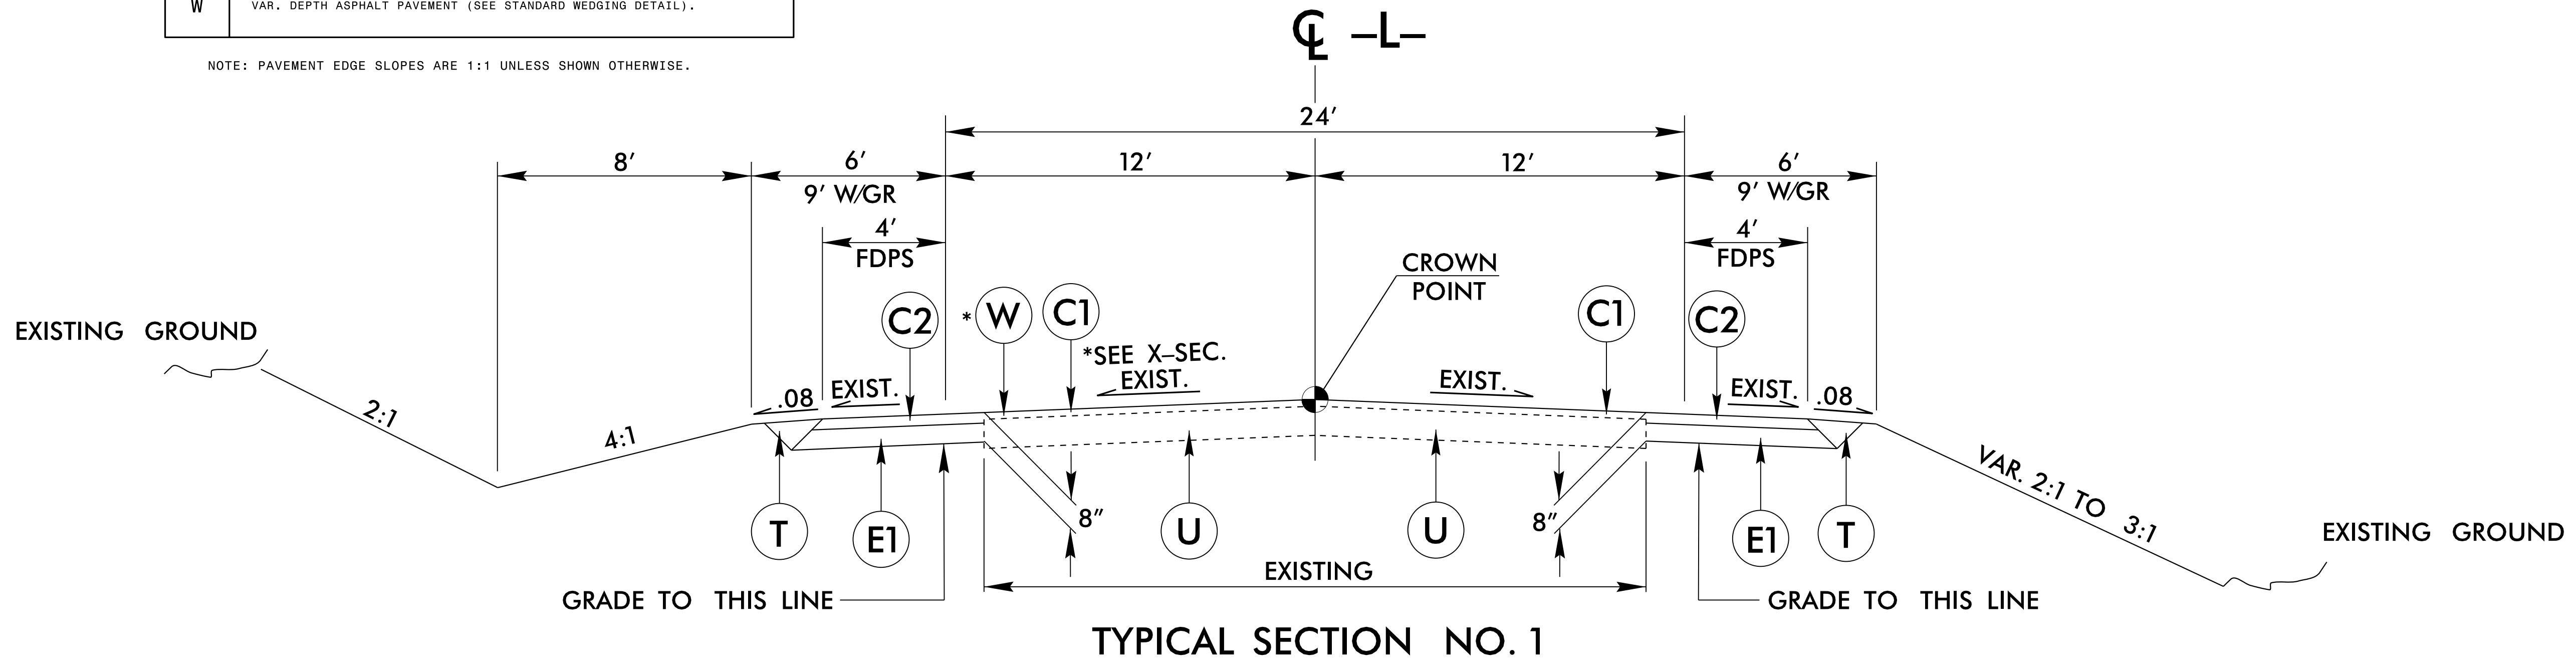


6/2/99

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5½" IN DEPTH.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	VAR. DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL).

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.


PROJECT REFERENCE NO. B-4780	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER DAVID W. GARDNER, JR. SEAL 033871 6/24/2015	PAVEMENT DESIGN ENGINEER CLARK S. MORRISON SEAL 022896 6/23/2015

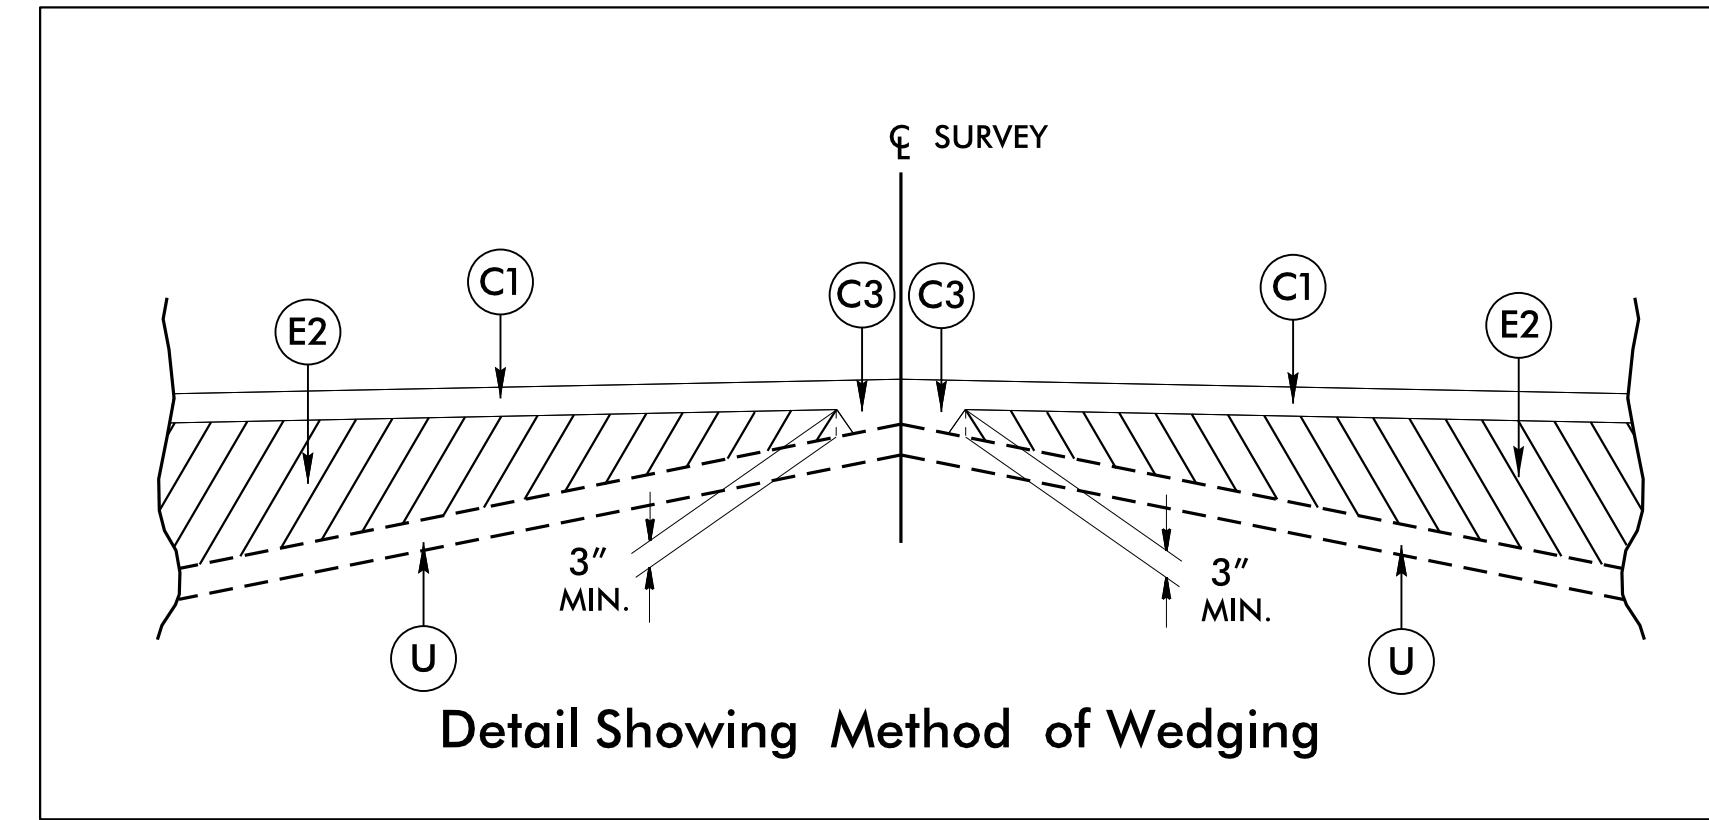

USE TYPICAL SECTION NO. 1

- L- STA. 12+00.00 TO STA. 12+50.00
- *-L- STA. 12+50.00 TO STA. 13+75.00
- L- STA. 16+50.00 TO STA. 18+00.00

NOTE: 1) SR 1111 (LILLY'S BRIDGE ROAD) IS A STATE DESIGNATED SANDHILLS BICYCLE ROUTE.
2) SEE PAVEMENT MARKING PLANS FOR LANE WIDTH TRANSITIONS.

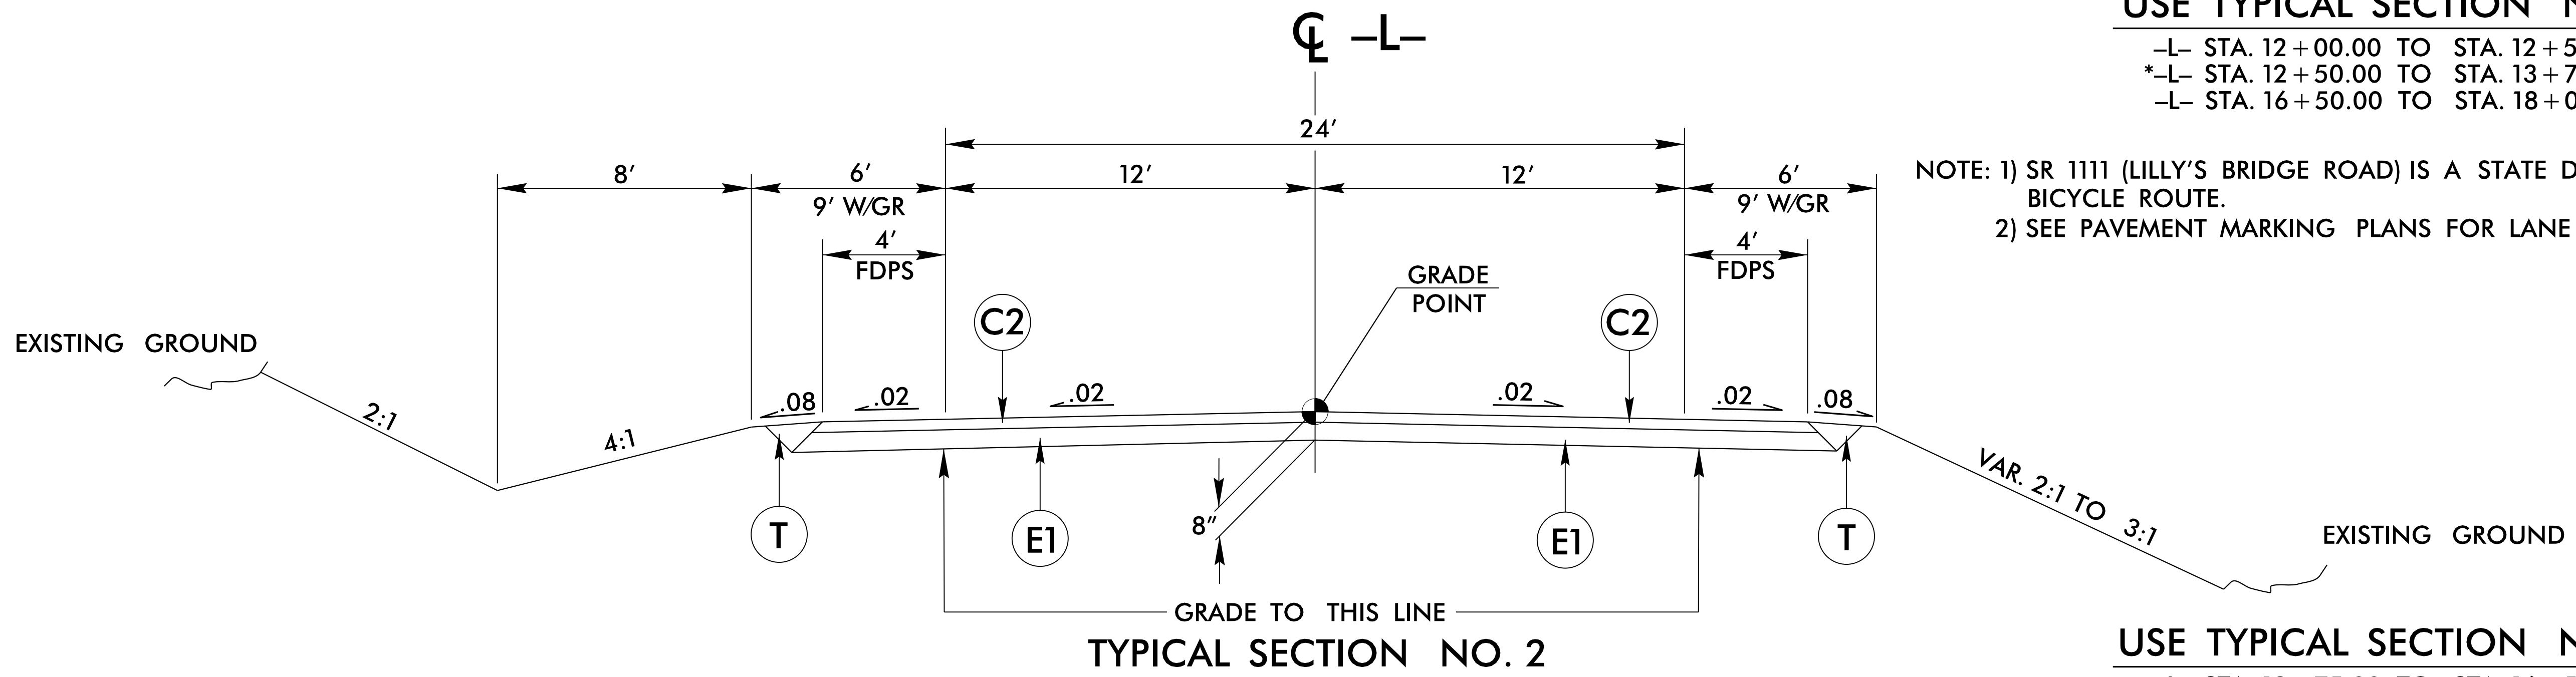

USE TYPICAL SECTION NO. 2

- L- STA. 13+75.00 TO STA. 16+50.00

22-APR-2015 09:19 04780.Rdy_tup.dgn
448035871