
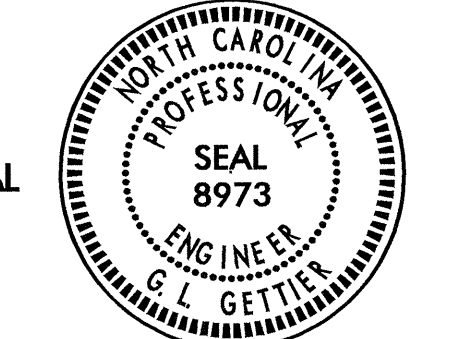
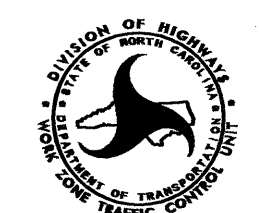



PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY	
			QUANTITY	UNIT	QUANTITY	UNIT
<u>FINAL PAVEMENT MARKINGS</u>						
		POLYUREA (4", 20MLS)				
VA	WHITE EDGELINE		6600	LF		
VB	YELLOW EDGELINE		6600	LF		
VC	10 FT. WHITE SKIP		1650	LF		
VD	2 FT. WHITE MINISKIP		80	LF		
					TOTAL	14930 LF
VP	WHITE GORELINE	POLYUREA (8", 20MLS)	400	LF		
					TOTAL	400 LF
V2	WHITE STOPBAR	POLYUREA (24" 20MILS)	40	LF		
					TOTAL	40 LF
<u>MARKERS PERMANENT RAISED PAVEMENT MARKERS</u>						
MB	CRYSTAL & RED		103	EA		
					TOTAL	103 EA
<u>TEMPORARY PAVEMENT MARKINGS</u>						
REMOVABLE TAPE (4")						
RA	WHITE EDGELINE		1965	LF		
RB	YELLOW EDGELINE		1310	LF		
RC	10 FT. WHITE SKIP		164	LF		
					TOTAL	3439 LF
PAINT (4")						
PA	WHITE EDGELINE		24000	LF		
PB	YELLOW EDGELINE		16000	LF		
PC	10 FT. WHITE SKIP		1650	LF		
PD	2 FT. WHITE MINISKIP		60	LF		
					TOTAL	41710 LF
PR	WHITE GORELINE	PAINT (8")	800	LF		
					TOTAL	800 LF
<u>MARKERS TEMPORARY RAISED PAVEMENT MARKERS</u>						
MH	YELLOW & YELLOW		462	EA		
MI	CRYSTAL & RED		504	EA		
					TOTAL	966 EA

29-JUL-2005 07:59
 \\p1s-c0fso3\B4009\tr\affic\tr\afficontr\top\b4009_TCP_PW-I.dgn
 mwashycg AT WZTC224168

APPROVED:  DATE: 7/20/05	PAVEMENT MARKING SCHEDULE		
	SCALE: NONE		
	DATE: 7-05		REVISIONS
	DWG. BY: MW		
	DESIGN BY: JWG		
REVIEWED BY: 		CADD FILE	