Ç Pole

Note 8

H1= 22.2'

Note 7

See Notes 4 & 5

16" Countdown Pedestrian Head

See Note 7d

Ç Foundation

Ç Foundation

Max=10'

See Note 7e


Base line reference elev. = 0.0'

Base line reference elev. = 0.0'


Maximum 25.6 ft.


Elevation Data for Mast Arm Attachment (H1)

Elevation Differences for:	Pole 3	Pole 4
Baseline reference point at & Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+1.2 ft.	-0.4 ft.
Elevation difference at Edge of travelway or face of curb	-0.3 ft.	-0.4 ft.

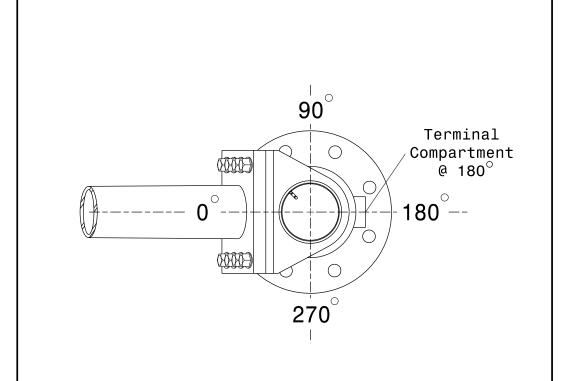

POLE RADIAL ORIENTATION

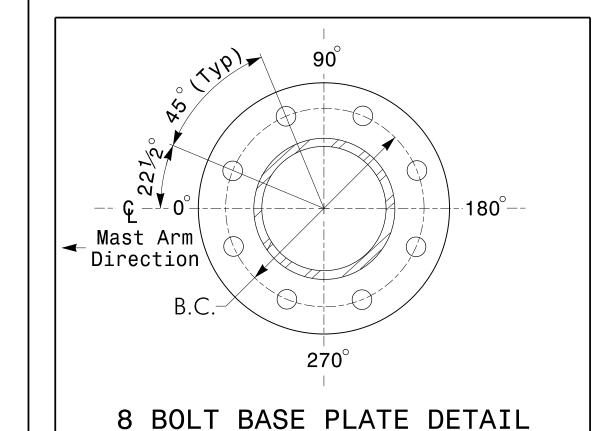

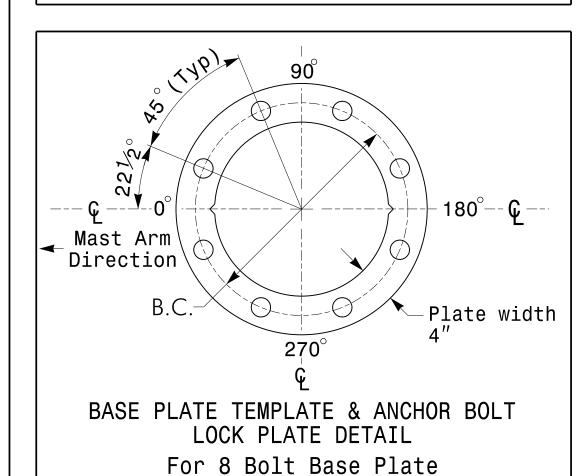

See Note 6

METAL POLE No. 3 and 4

PROJECT REFERENCE NO. SHEET NO.

U-3338B Sig. 5.4

MAST ARM LOADING SCHEDULE					
loading Symbol	DESCRIPTION	AREA	SIZE	WEIGHT	
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5″W X 66.0″L	74 LBS	
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5″W X 52.5″L	60 LBS	
	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS	
2	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0"L	14 LBS	
Street Name	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0"L	36 LBS	

<u>NOTES</u>

DESIGN REFERENCE MATERIAL

- 1. Design the traffic signalstructure and foundation in accordance with:
- The 5th Edition 2009 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
- The 2012 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
- The 2012 NCDOT Roadway Standard Drawings.
- The traffic signal project plans and special provisions.
- The NCDOT "MetalPole Standards" located at the following NCDOT website:
- https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx

DESIGN REQUIREMENTS

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
 Design all signal supports using stress ratios that do not exceed 0.9.
- 4. The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.
- 5. A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- 6. Design base plate with 8 anchor bolt holes. Provide 2 inch \times 60 inch anchor bolts.
- 7. The mast arm attachment height (H1) shown is based on the following design assumptions:
- a. Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
- b. Signalheads are rigidly mounted and vertically centered on the mast arm.
- c. The roadway clearance height for design is as shown in the elevation views.
- d. The top of the pole base plate is 0.75 feet above the ground elevation.
- e. Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground leveland the high point of the roadway.
- 8. The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
- Mast arm attachment height (H1) plus 2 feet, or
- H1 plus 1/2 of the totalheight of the mast arm attachment assembly plus 1 foot.
- 9. If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 773-2800.
- 10.The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signalheads over the roadway.
- 11. The contractor is responsible for providing soilpenetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

All metalpoles and arms should be black in color as specified in the project special provisions.





N/A

SR 1175 (Kerr Avenue) at Randall Parkway


Division 03 New Hanover County Wilmington
PLAN DATE: June 2014 REVIEWED BY: LM Moon
PREPARED BY: AM Thigpen REVIEWED BY: MB Toth
REVISIONS INIT. DATE



SIG. INVENTORY NO. 03-0605

— D86DCF8E04D04AF...

31 on*Traffic*Curr*100036295 U3338B Kerr Sig_ITS*Signals*Metal Poles*U-3338B Single Mast Arm(3-4).dgn US290140

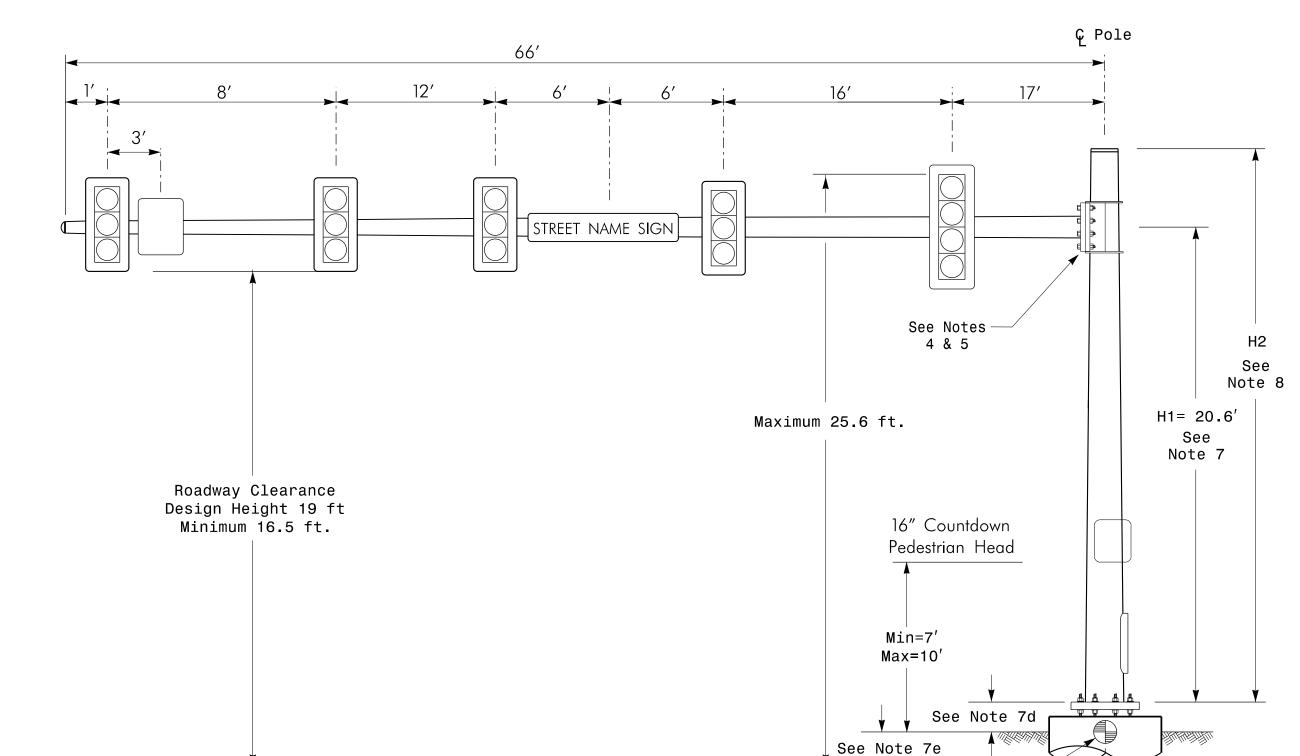

Elevation View

Design Loading for METAL POLE NO. 3

Street name sign

Elevation View

Design Loading for METAL POLE NO. 4

High Point of Roadway Surface

High Point of Roadway Surface

Roadway Clearance Design Height 19 ft

Minimum 16.5 ft.