PROJECT REFERENCE NO.	SHEET NO.
2016CPT.01.03.10081.1, ETC.	6

P A V E M E N T S C H E D U L E

C1	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
V1	MILLING BITUMINOUS PAVEMENT. 1.5″ IN DEPTH.
U	EXISTING PAVEMENT.

NOTES:

*ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII., OR AS DIRECTED BY THE ENGINEER

*EDGES, PAVEMENT WIDENING, INTERSECTIONS, AND BRIDGE FLARES ARE INCLUDED IN THE SUMMARY OF QUANTITIES

*CONTRACTOR SHALL MILL 1.5" BELOW EXISTING EDGE OF CONC. CURB & GUTTER.

LOOP INSTALLATION SHALL OCCUR PRIOR TO INSTALLATION OF THE FINAL SURFACE.

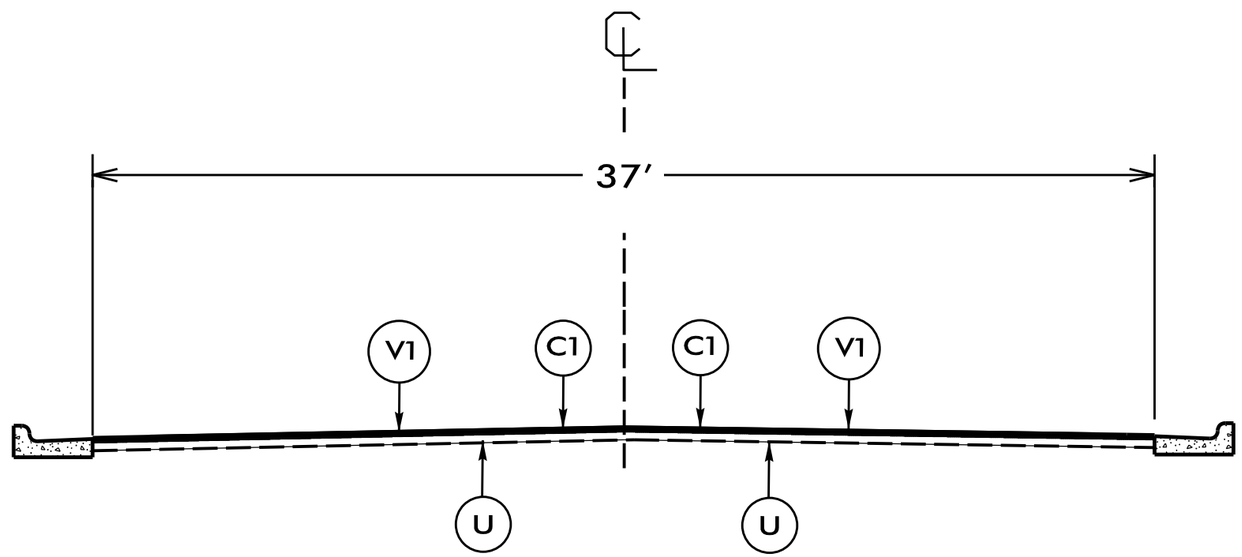

TYPICAL SECTION NO. 3

USE WITH MAP 4 & 6

NTS

$$$$$SYSTIME$$$$$
$$$$$DGN$$$$$