


8/17/15

10/21/2015 10:41:10 AM P:\Projects\2409C_Rdly_4jpb.dgn


PAVEMENT SCHEDULE (8/27/15)	
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J	PROP. APPROX. 8" AGGREGATE BASE COURSE
N	GEOTEXTILE FOR PAVEMENT STABILIZATION
P	PRIME COAT AT THE RATE OF 0.35 GAL. PER SQ. YARD
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL ON THIS PAGE.)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

NOTE:
SEE PLANS FOR PAVEMENT WIDTH FOR:
ADDITIONAL PAVEMENT FOR CURVES
CENTER TURN LANE AT NC 281

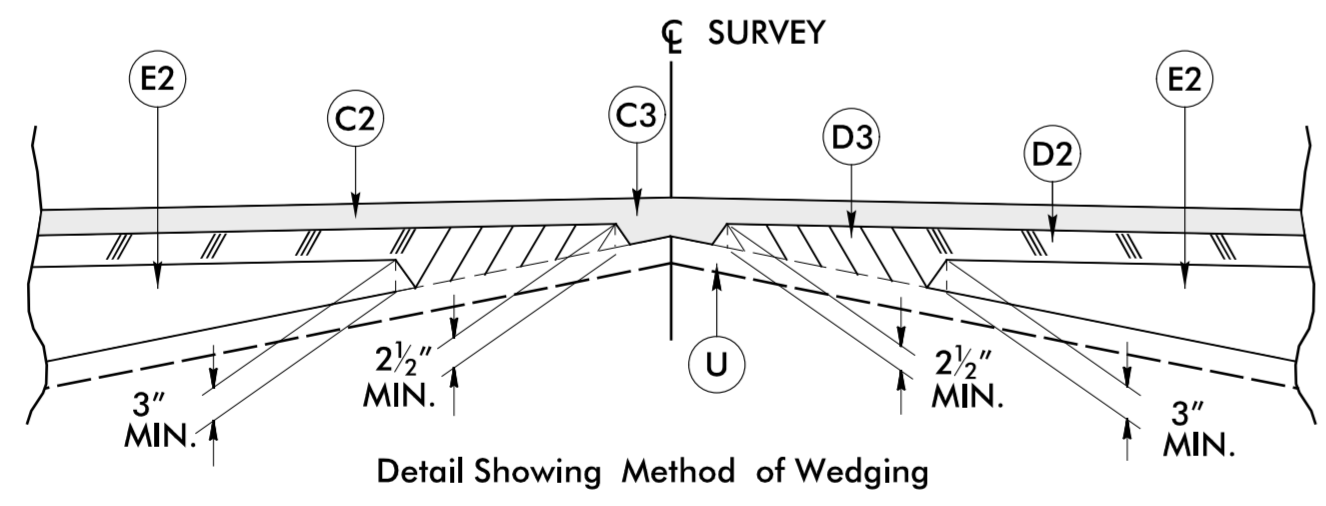


PROJECT REFERENCE NO. R-2409C	SHEET NO. 2A-1
RW SHEET NO.	
ROADWAY DESIGN ENGINEER DAVID C. WALLER SEAL 22606 NORTH CAROLINA PROFESSIONAL ENGINEER	PAVEMENT DESIGN ENGINEER CLARK S. MORRISON SEAL 22896 NORTH CAROLINA PROFESSIONAL ENGINEER
DocuSigned by: David C. Waller 08A03F156C5435 10/22/2015	DocuSigned by: Clark S. Morrison 086238016E4F400 10/23/2015

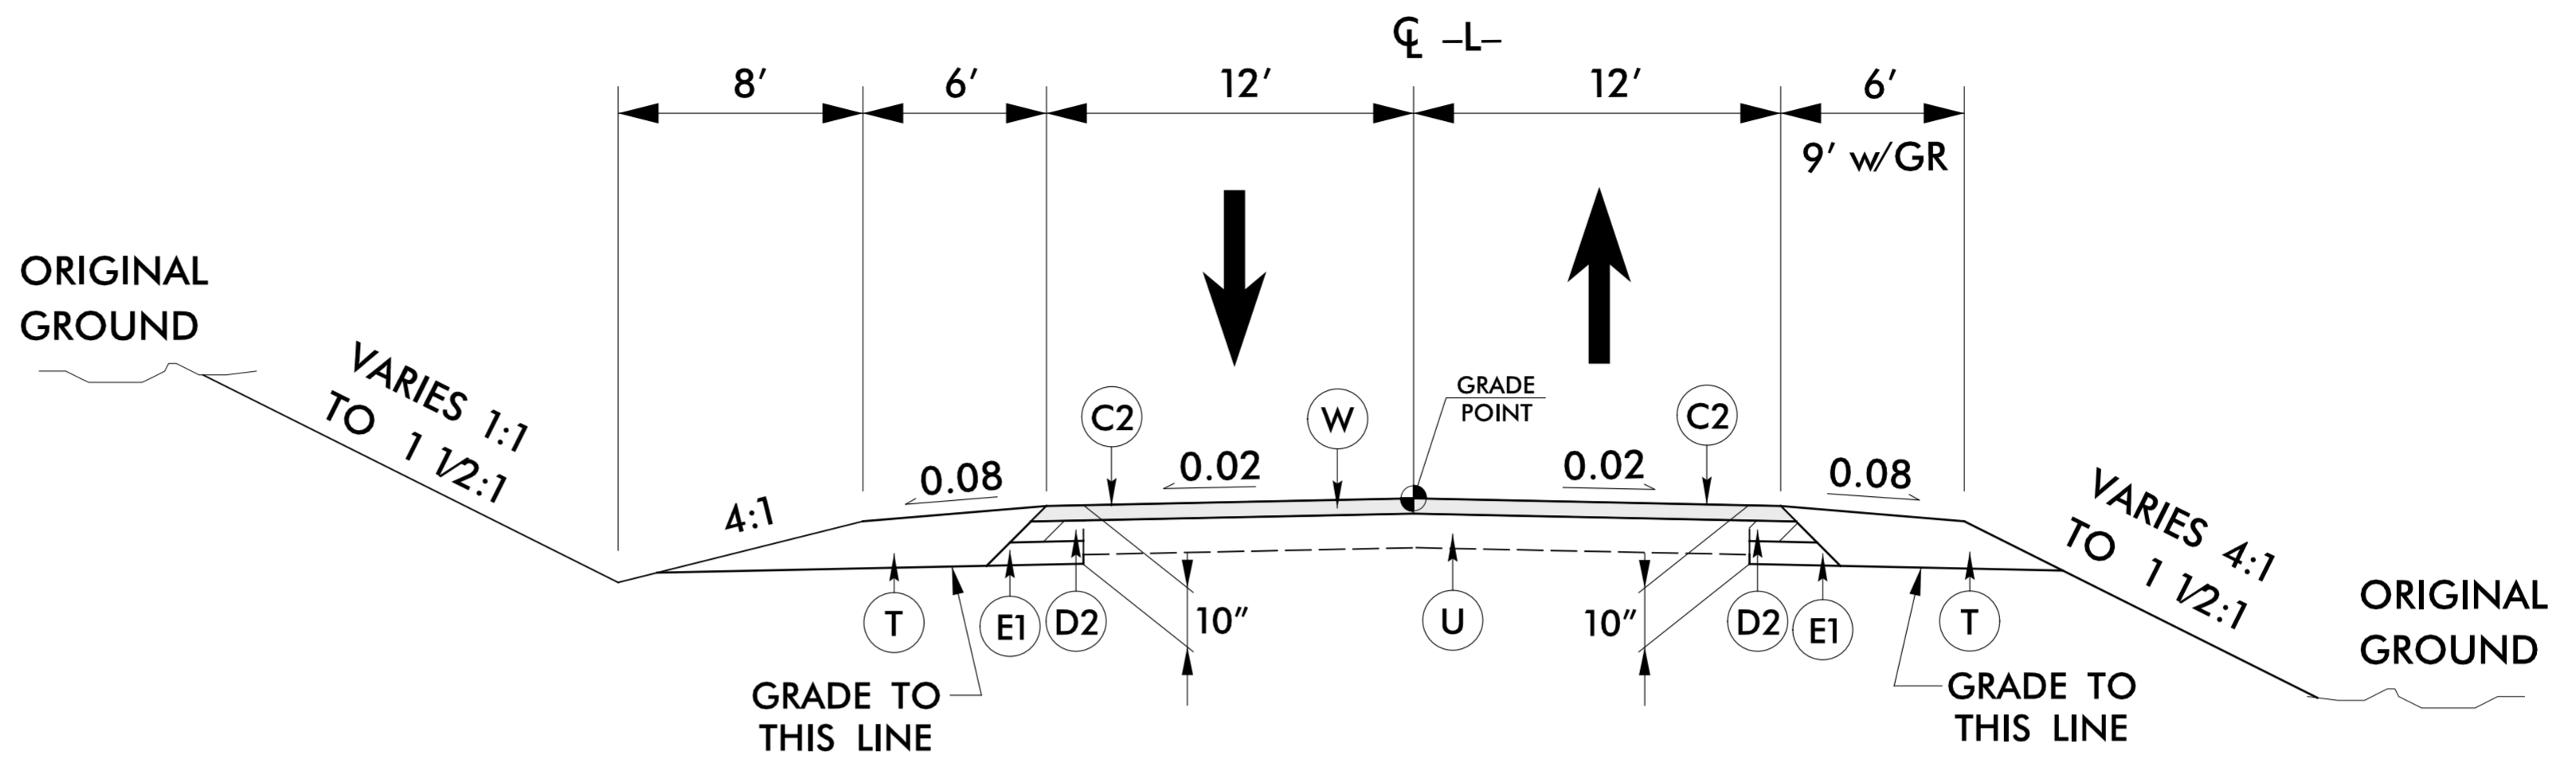


TYPICAL SECTION 1

- L- STA 10+05 TO -L- STA 16+45
- L- STA 19+55 TO -L- STA 20+45
- L- STA 27+00 TO -L- STA 28+45
- L- STA 71+55 TO -L- STA 77+00

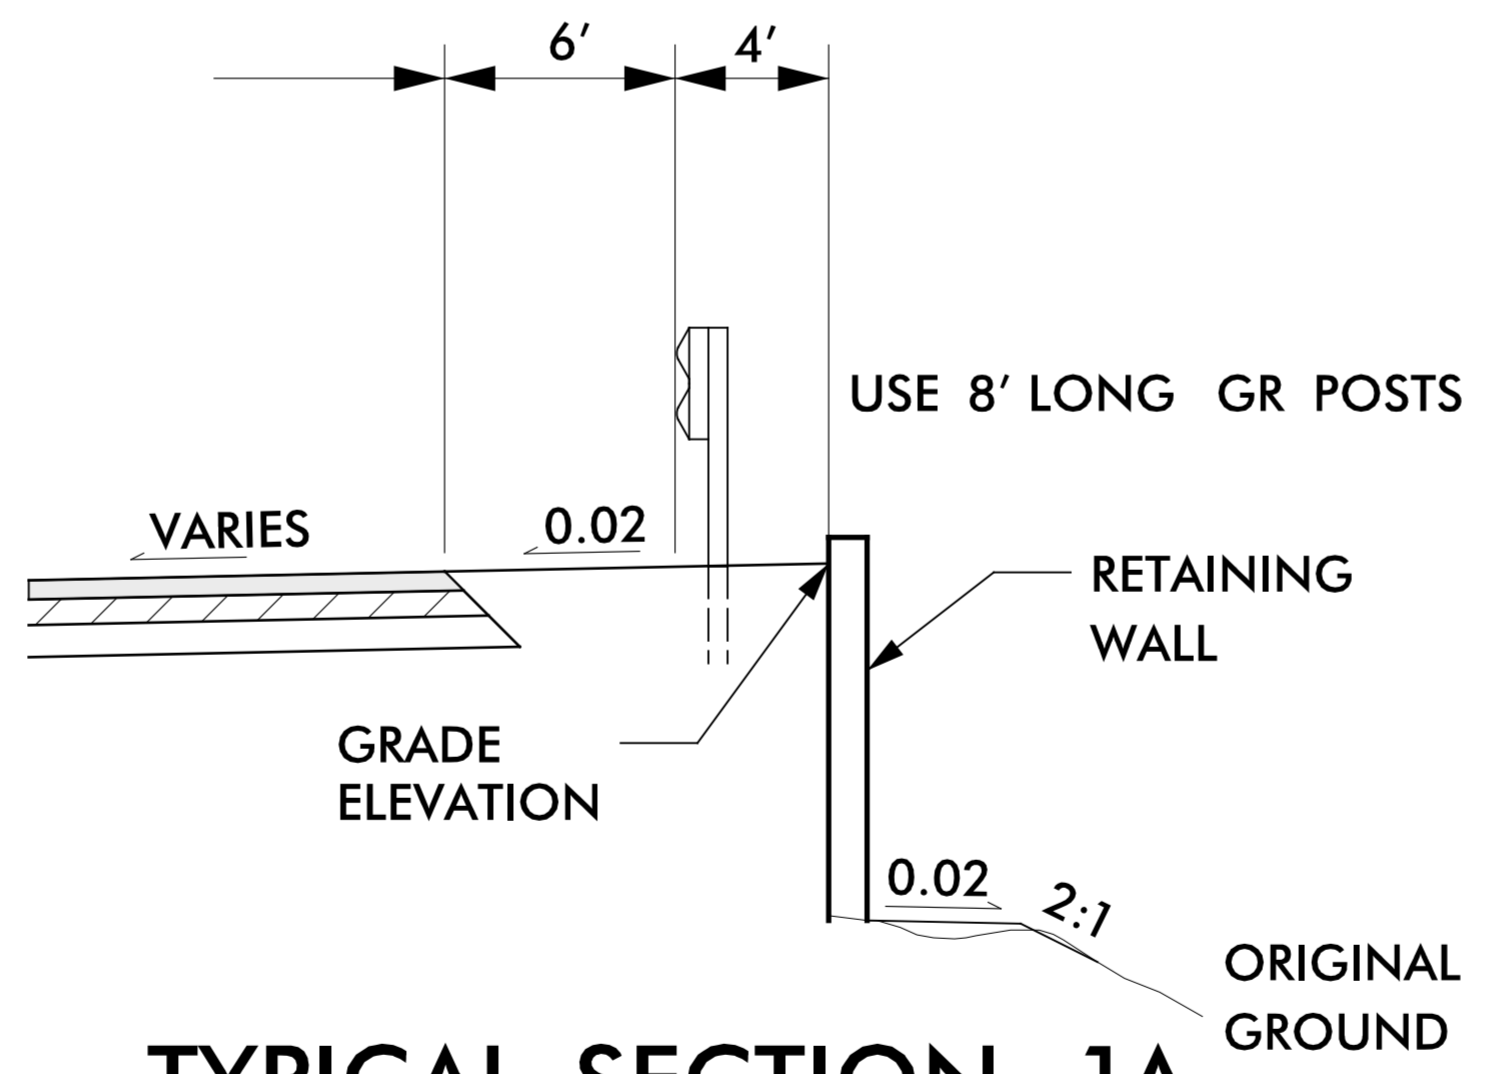

TYPICAL SECTION 1A

- L- STA 10+75 TO -L- STA 16+50 RT

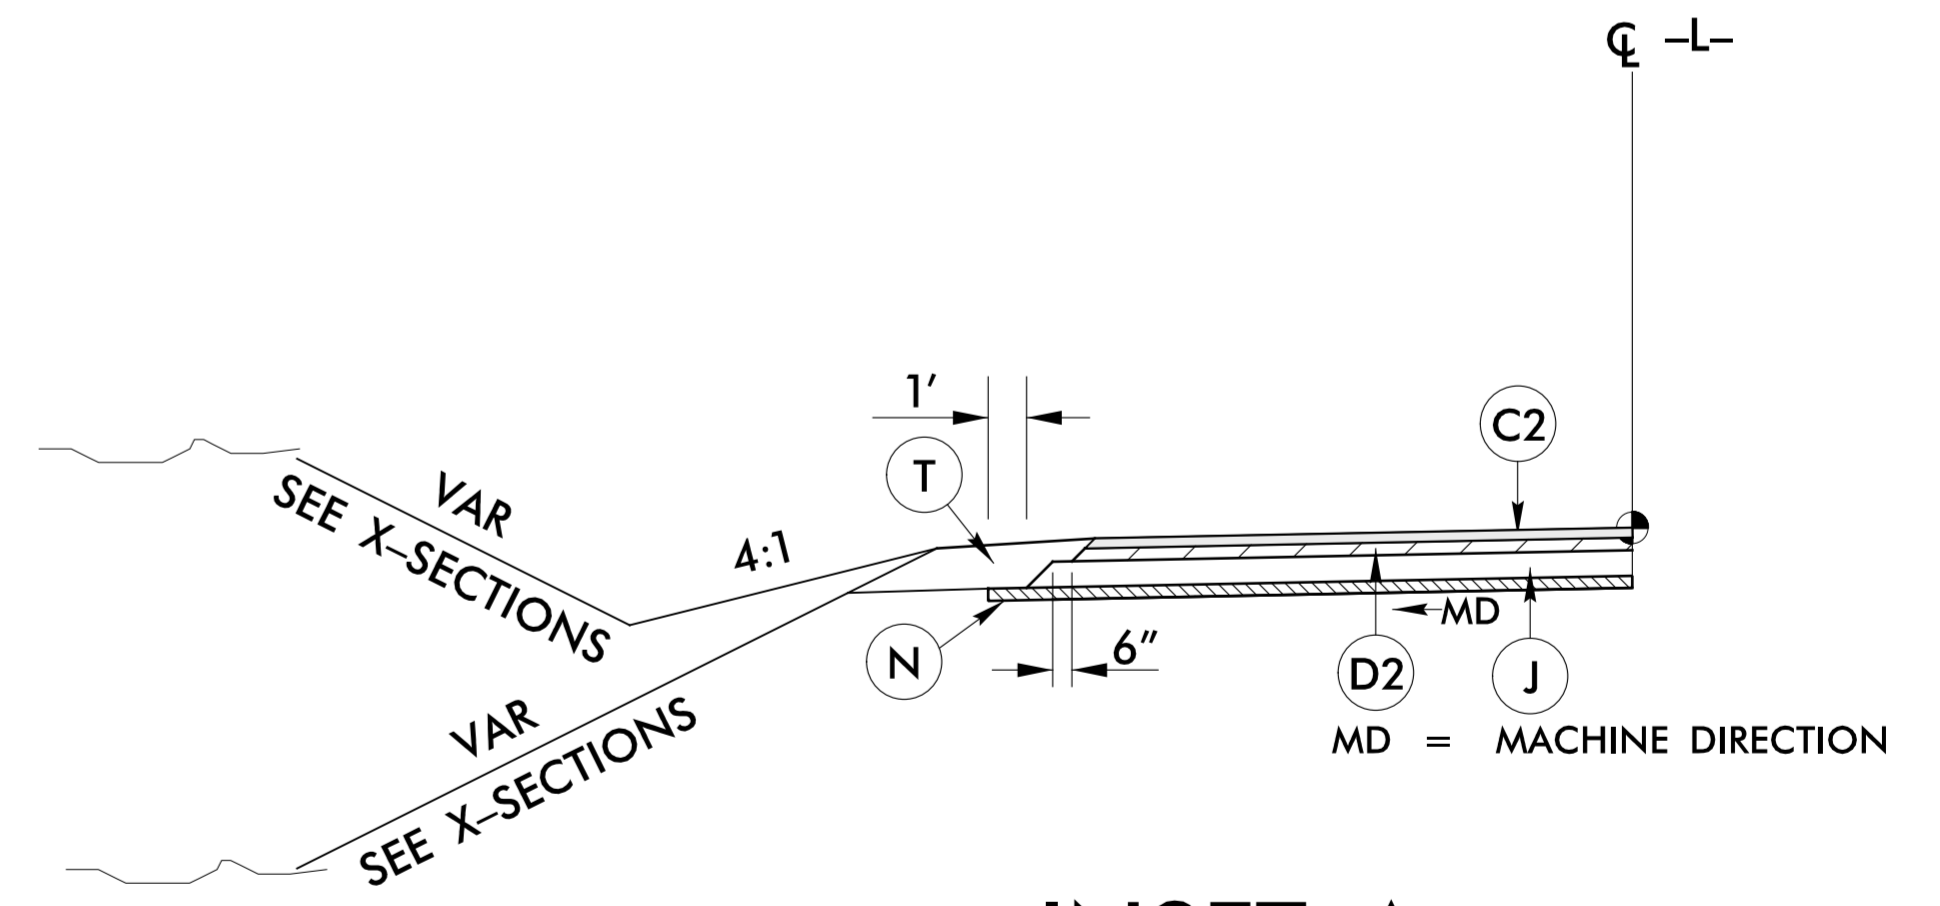

USE GEOTEXTILE FOR PAVEMENT STABILIZATION
(LOCATIONS TO BE INVESTIGATED DURING CONSTRUCTION)