
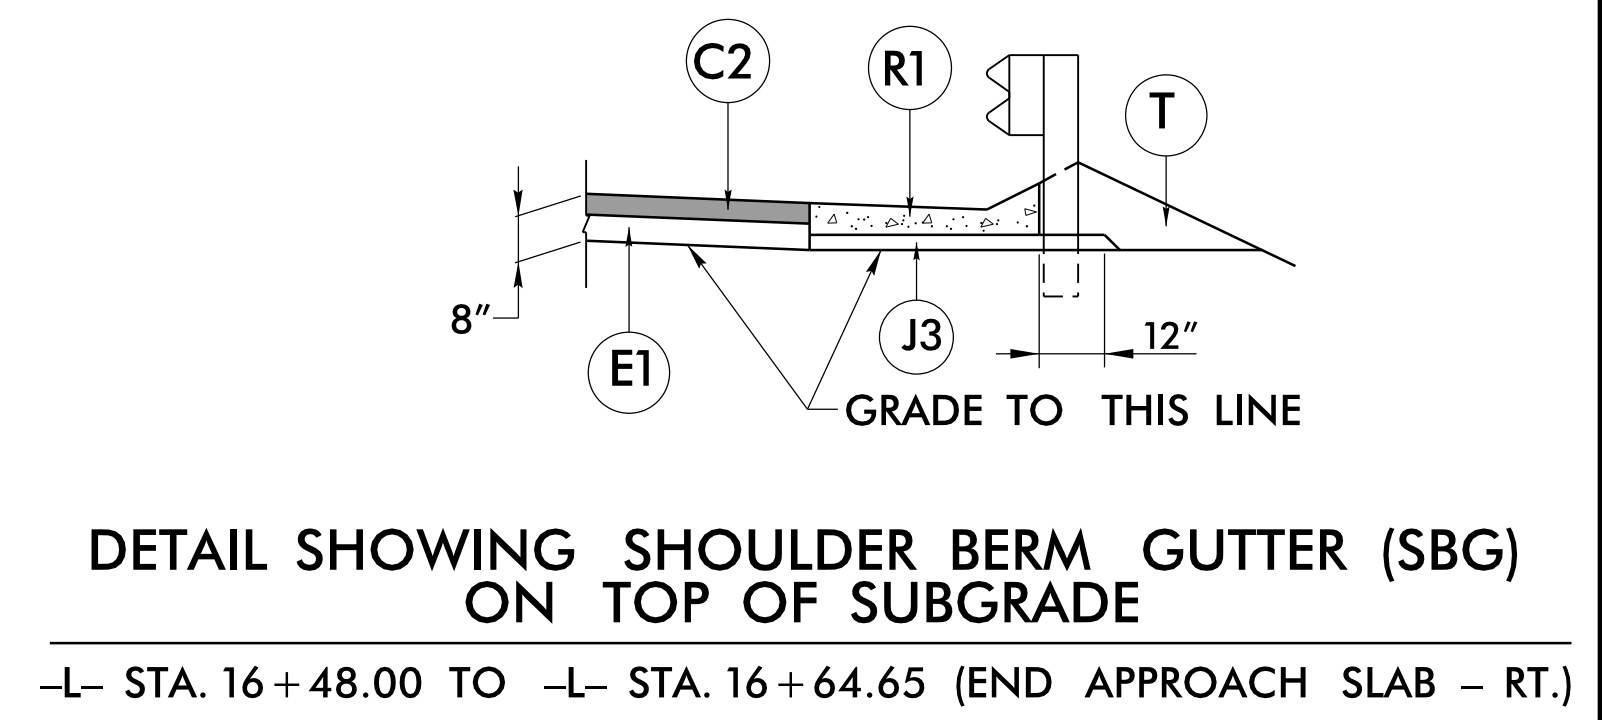
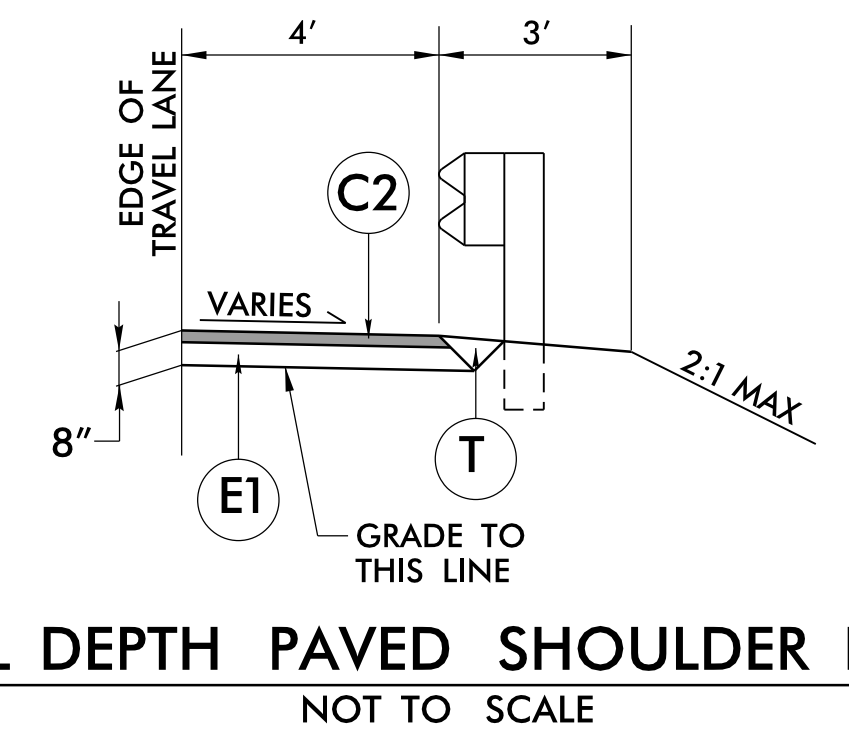
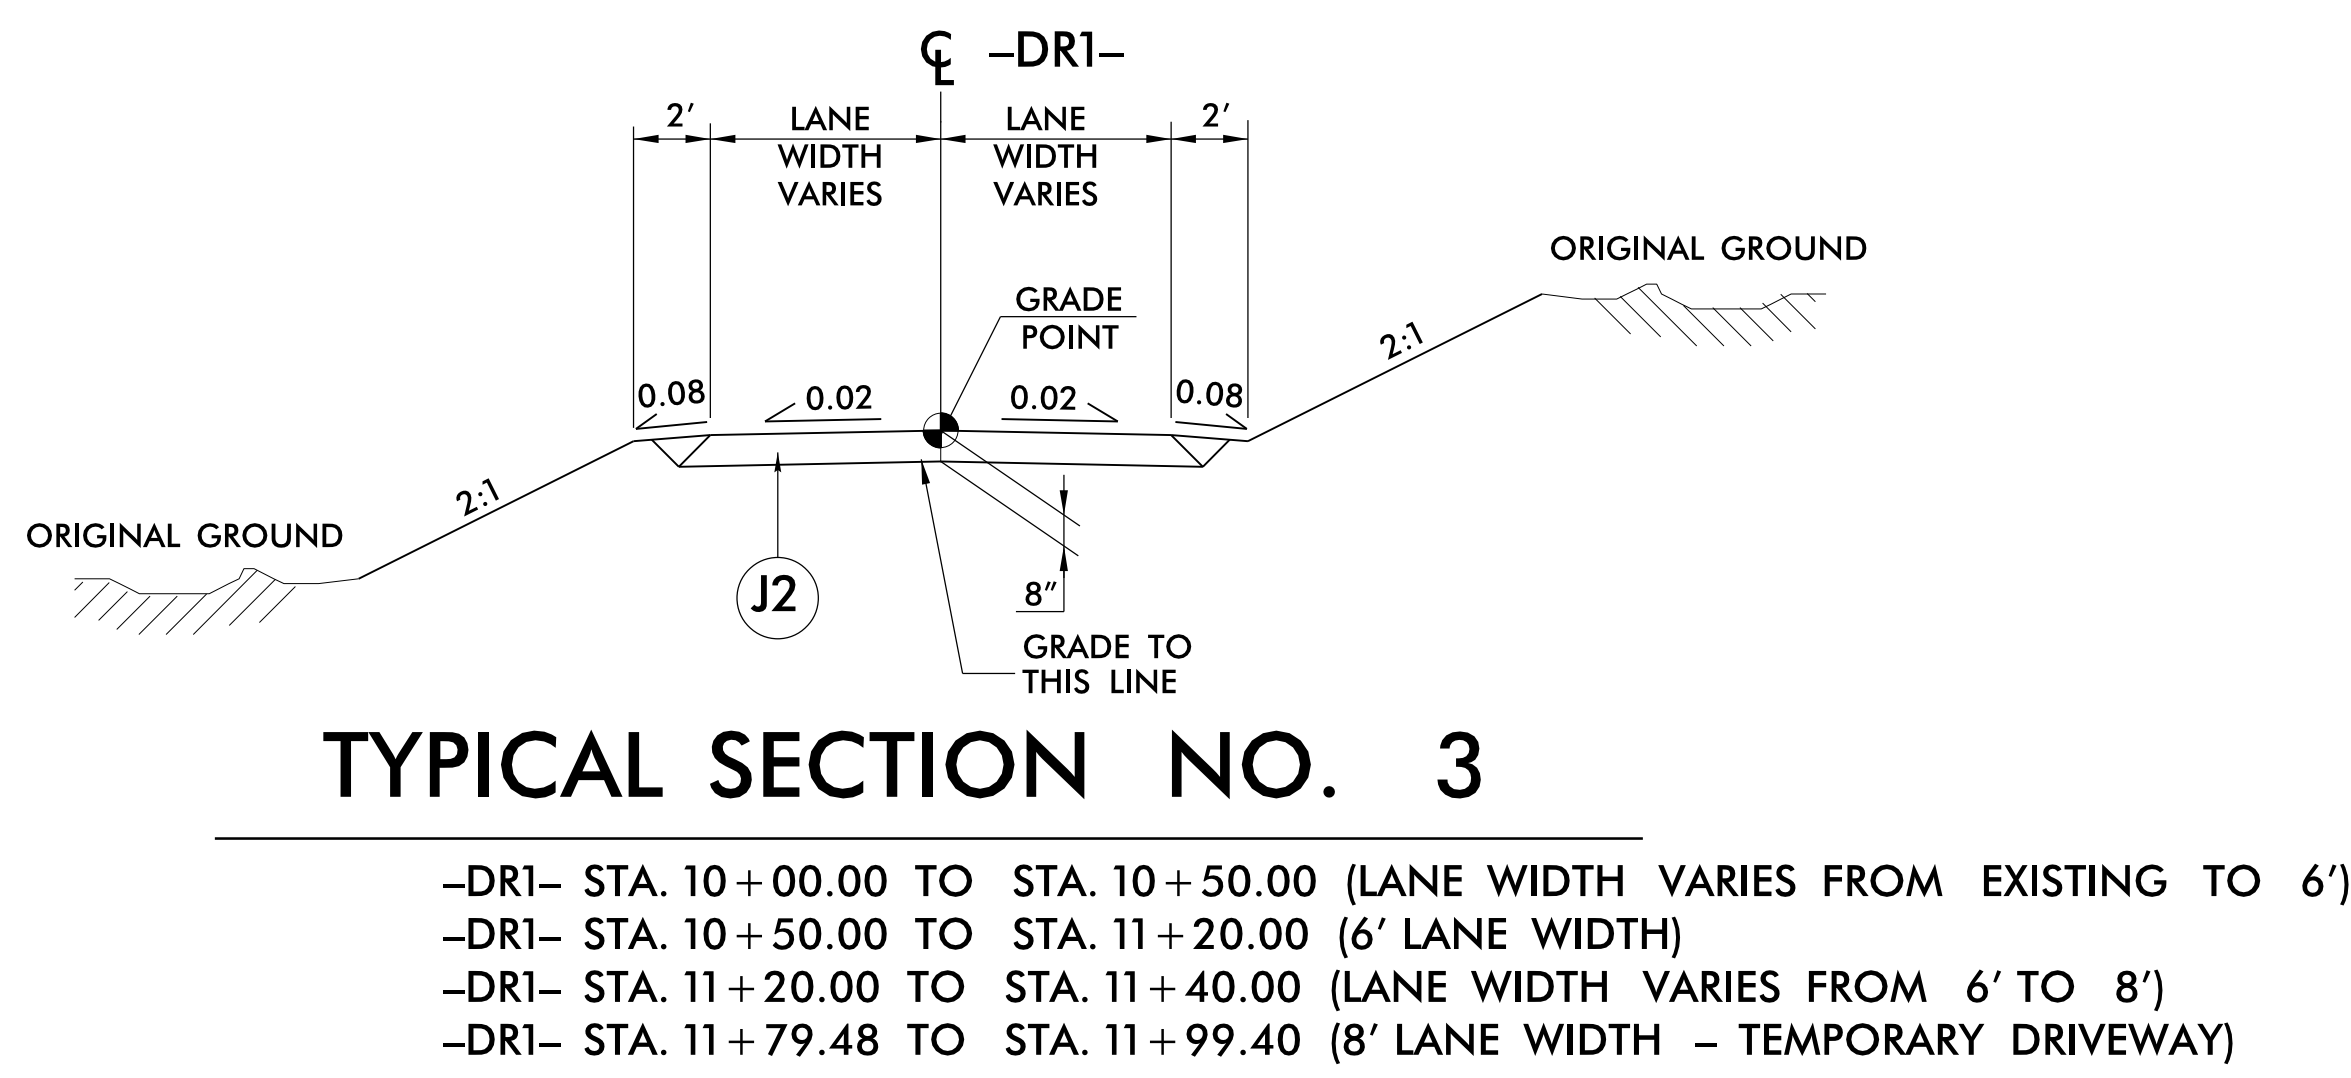
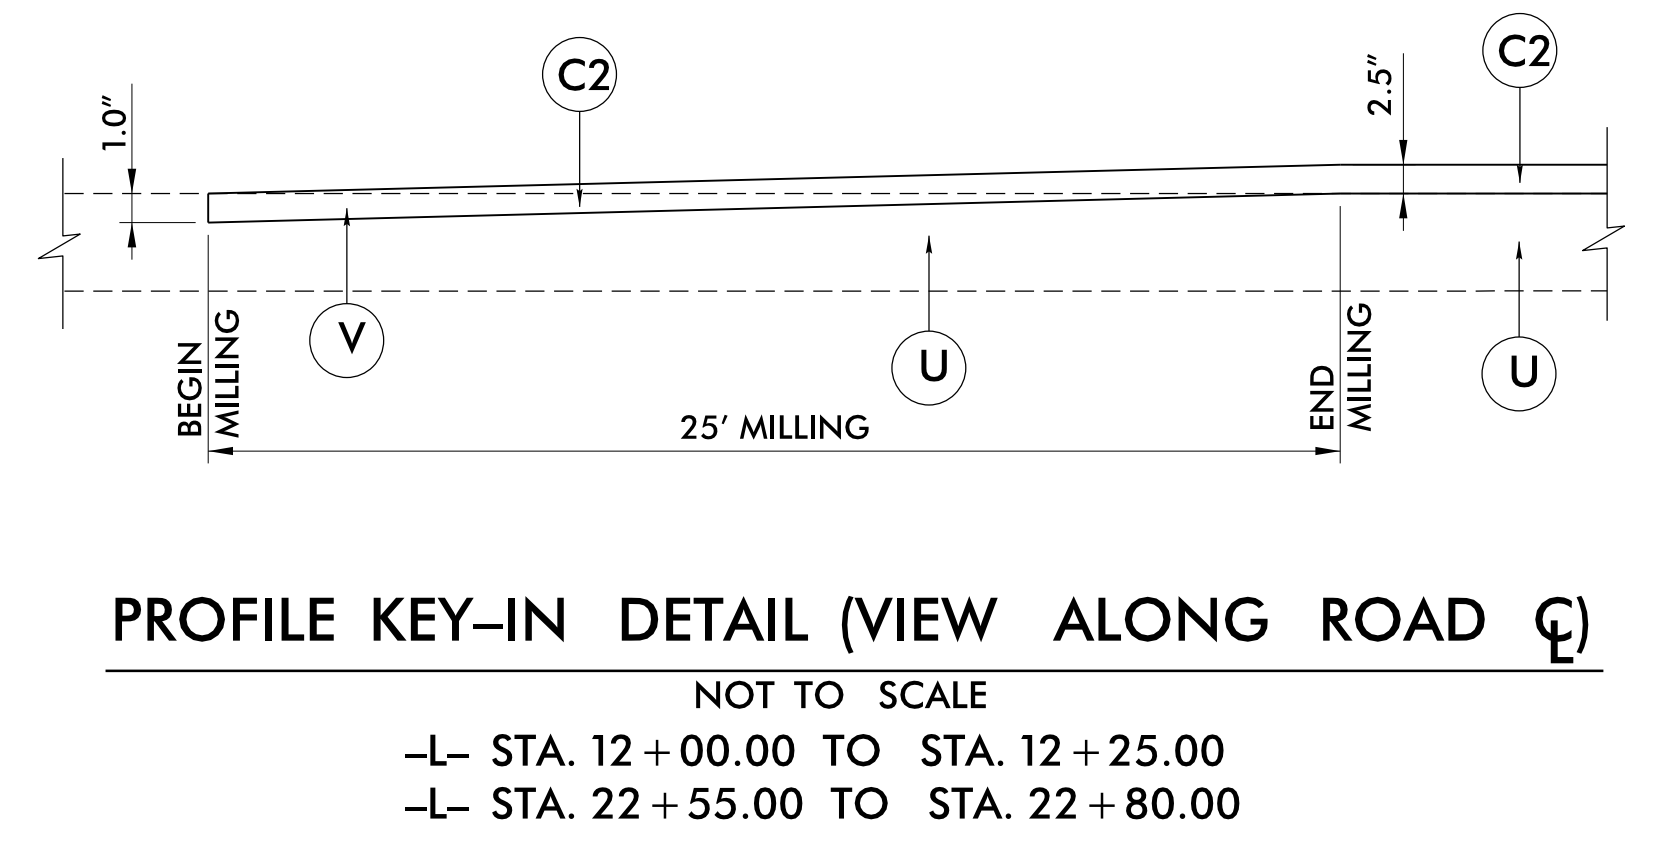
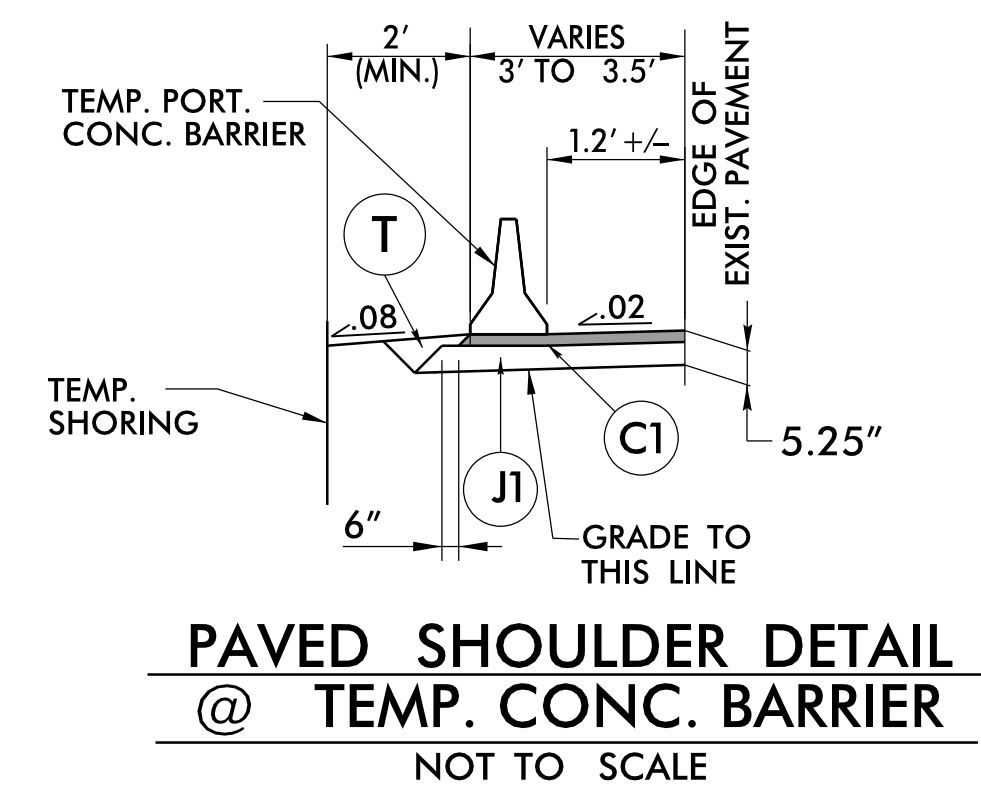
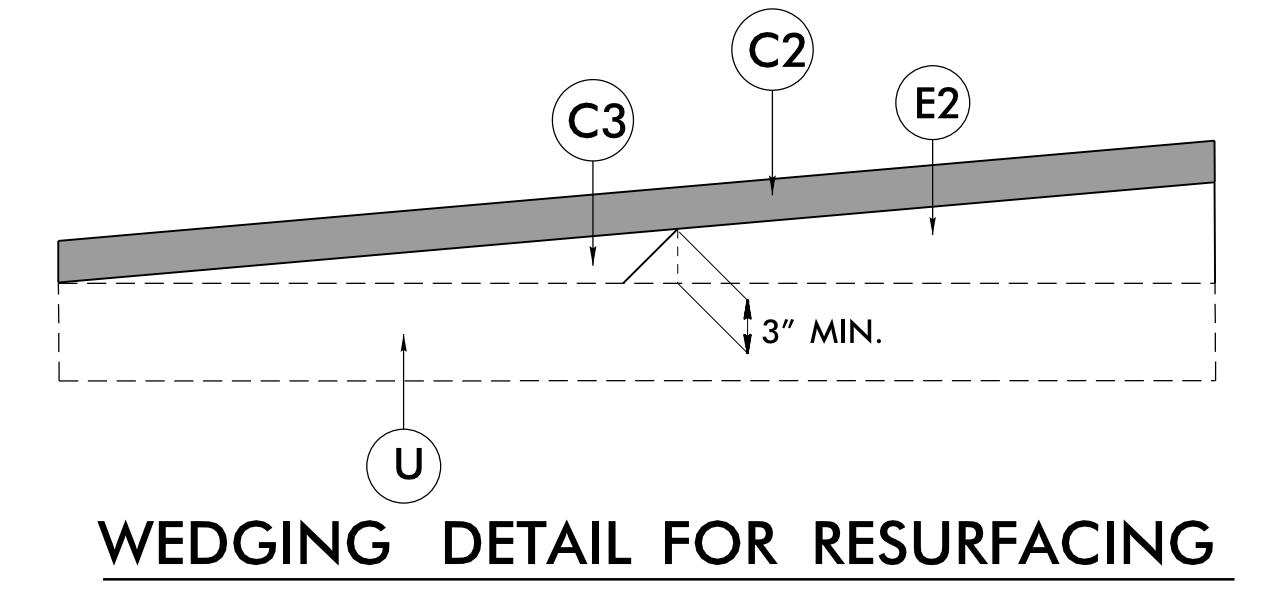
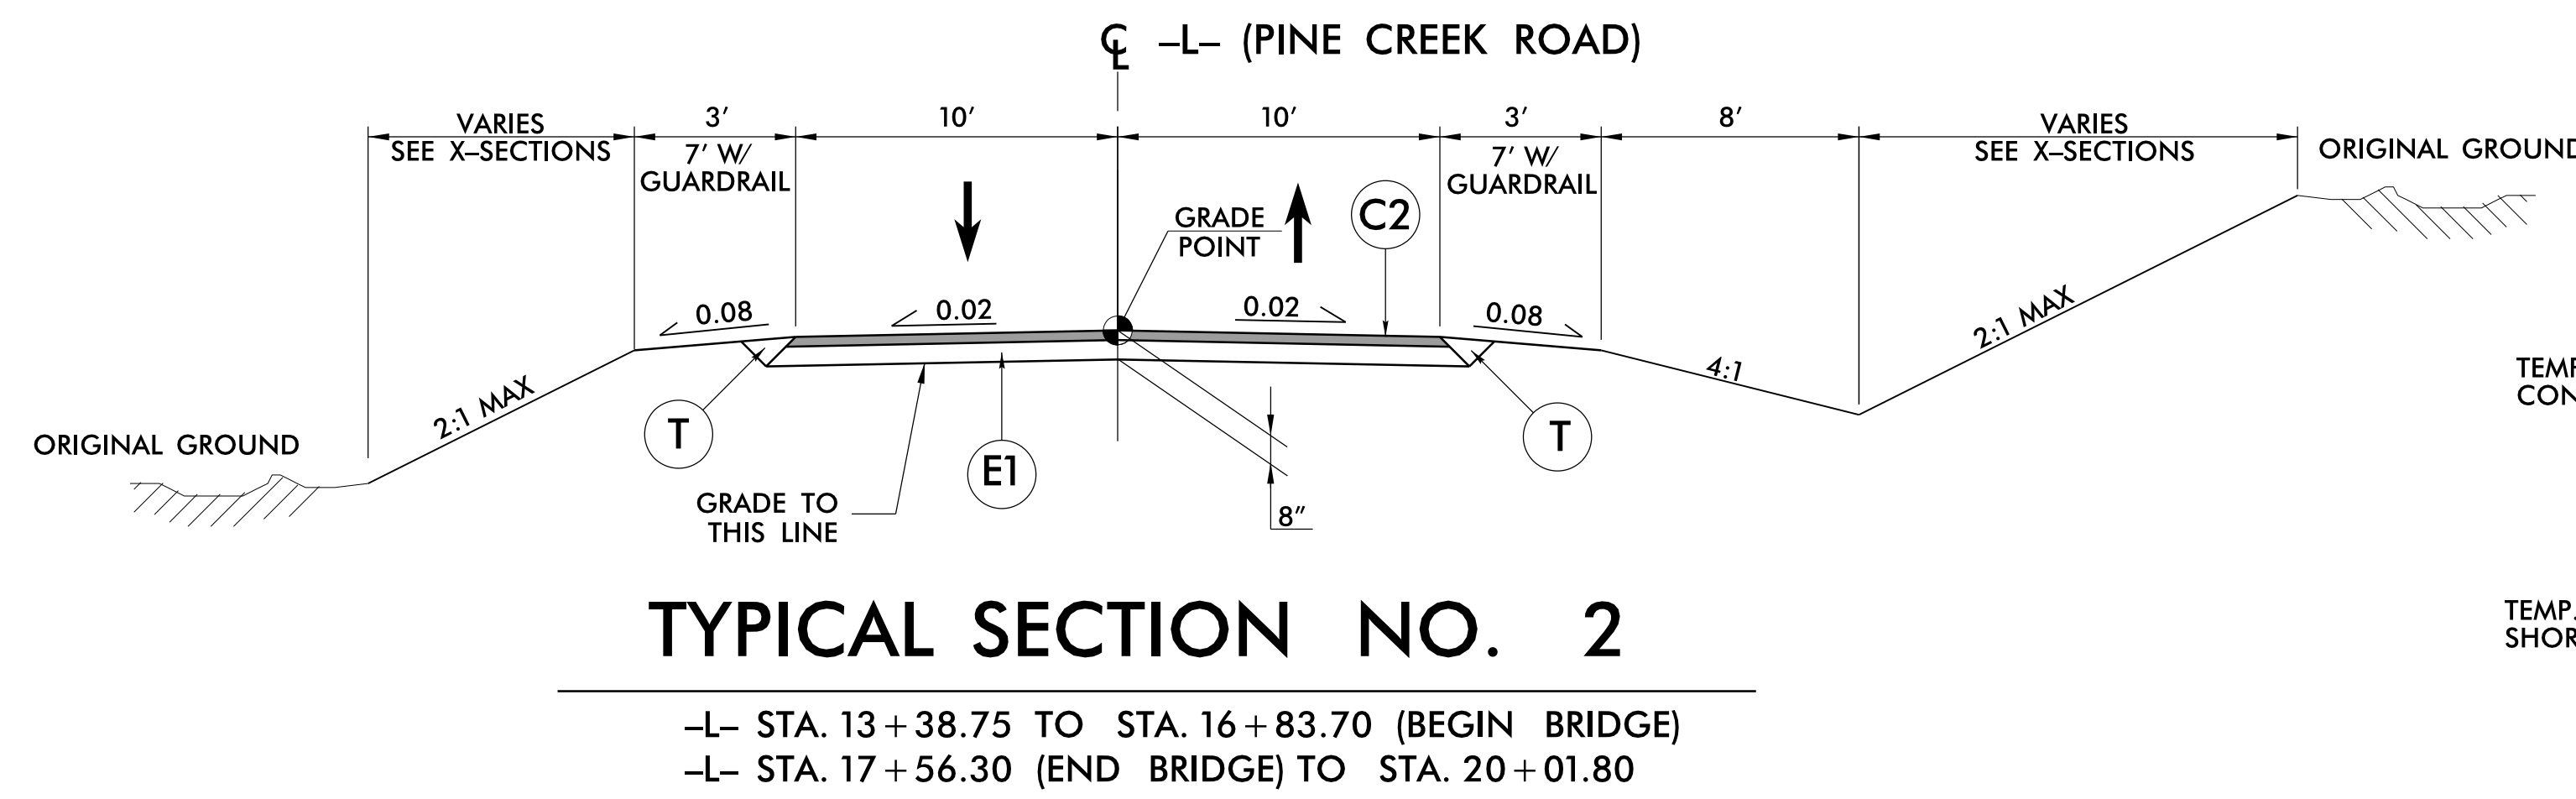
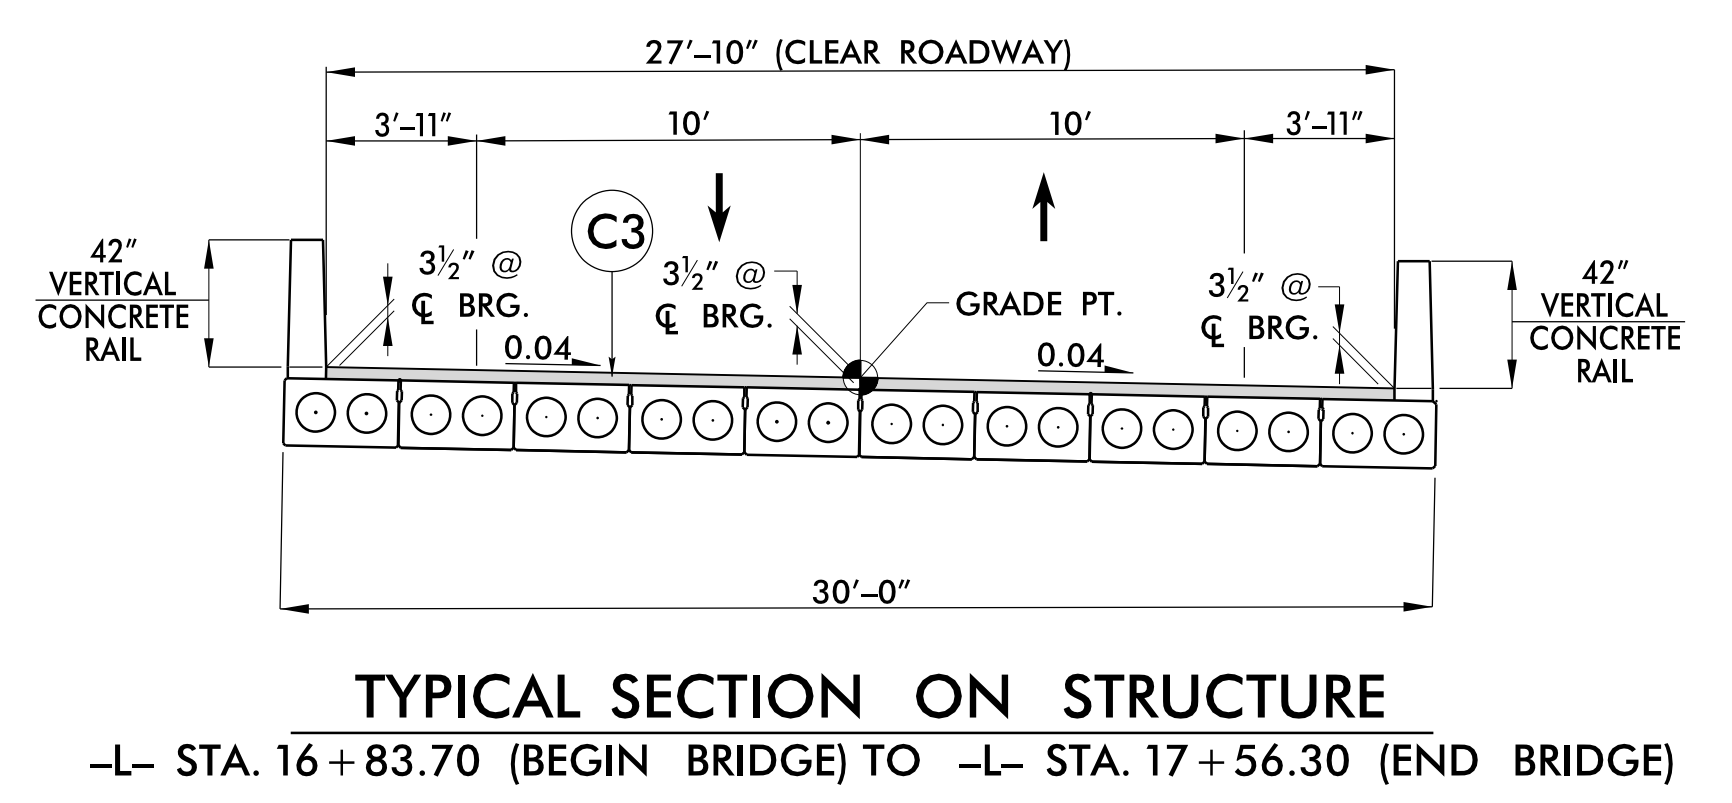


6/2/2015

FINAL PAVEMENT SCHEDULE

| | |
|---|------------------------------|
| PROJECT REFERENCE NO. B-5404 | SHEET NO. 2A-1 |
| ROADWAY DESIGN ENGINEER | PAVEMENT DESIGN ENGINEER |
| 2410 WILKIE ROAD SUITE 400 RALEIGH, NC 27607 PHONE: 919.885.9000 NC CEA NO. E-20029 | |
| NC DEPARTMENT OF TRANSPORTATION PAVEMENT MANAGEMENT UNIT 1593 MAIL SERVICE CENTER RALEIGH, NC 27699-1593 | |
| NOTE: PAVEMENT EDGES ARE 1:1 UNLESS OTHERWISE NOTED. | |

| ITEM | DESCRIPTION | ITEM | DESCRIPTION | ITEM | DESCRIPTION | ITEM | DESCRIPTION |
|------|--|------|---|------|----------------------|------|-------------------|
| (C1) | PROPOSED APPROXIMATE 1.25" ASPHALT SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.50 LBS /SY. | (E2) | PROP. VAR. DEPTH ASPHALT BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS/SY PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5.5" IN DEPTH OR LESS THAN 3" IN DEPTH. | (V) | INCIDENTAL MILLING | (T) | EARTH MATERIAL |
| (C2) | PROPOSED APPROXIMATE 2.5" ASPHALT SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.50 LBS /SY. IN EACH OF TWO LAYERS. | (J1) | PROP. 4" AGGREGATE BASE COURSE | (R1) | SHOULDER BERM GUTTER | (U) | EXISTING PAVEMENT |
| (C3) | PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS /SY PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH. | (J2) | PROP. 8" AGGREGATE BASE COURSE | (W) | WEDGING | | |
| (E1) | PROP. APPROX. 5.5" ASPHALT BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS /SY. | (J3) | PROP. 3" AGGREGATE BASE COURSE | | | | |

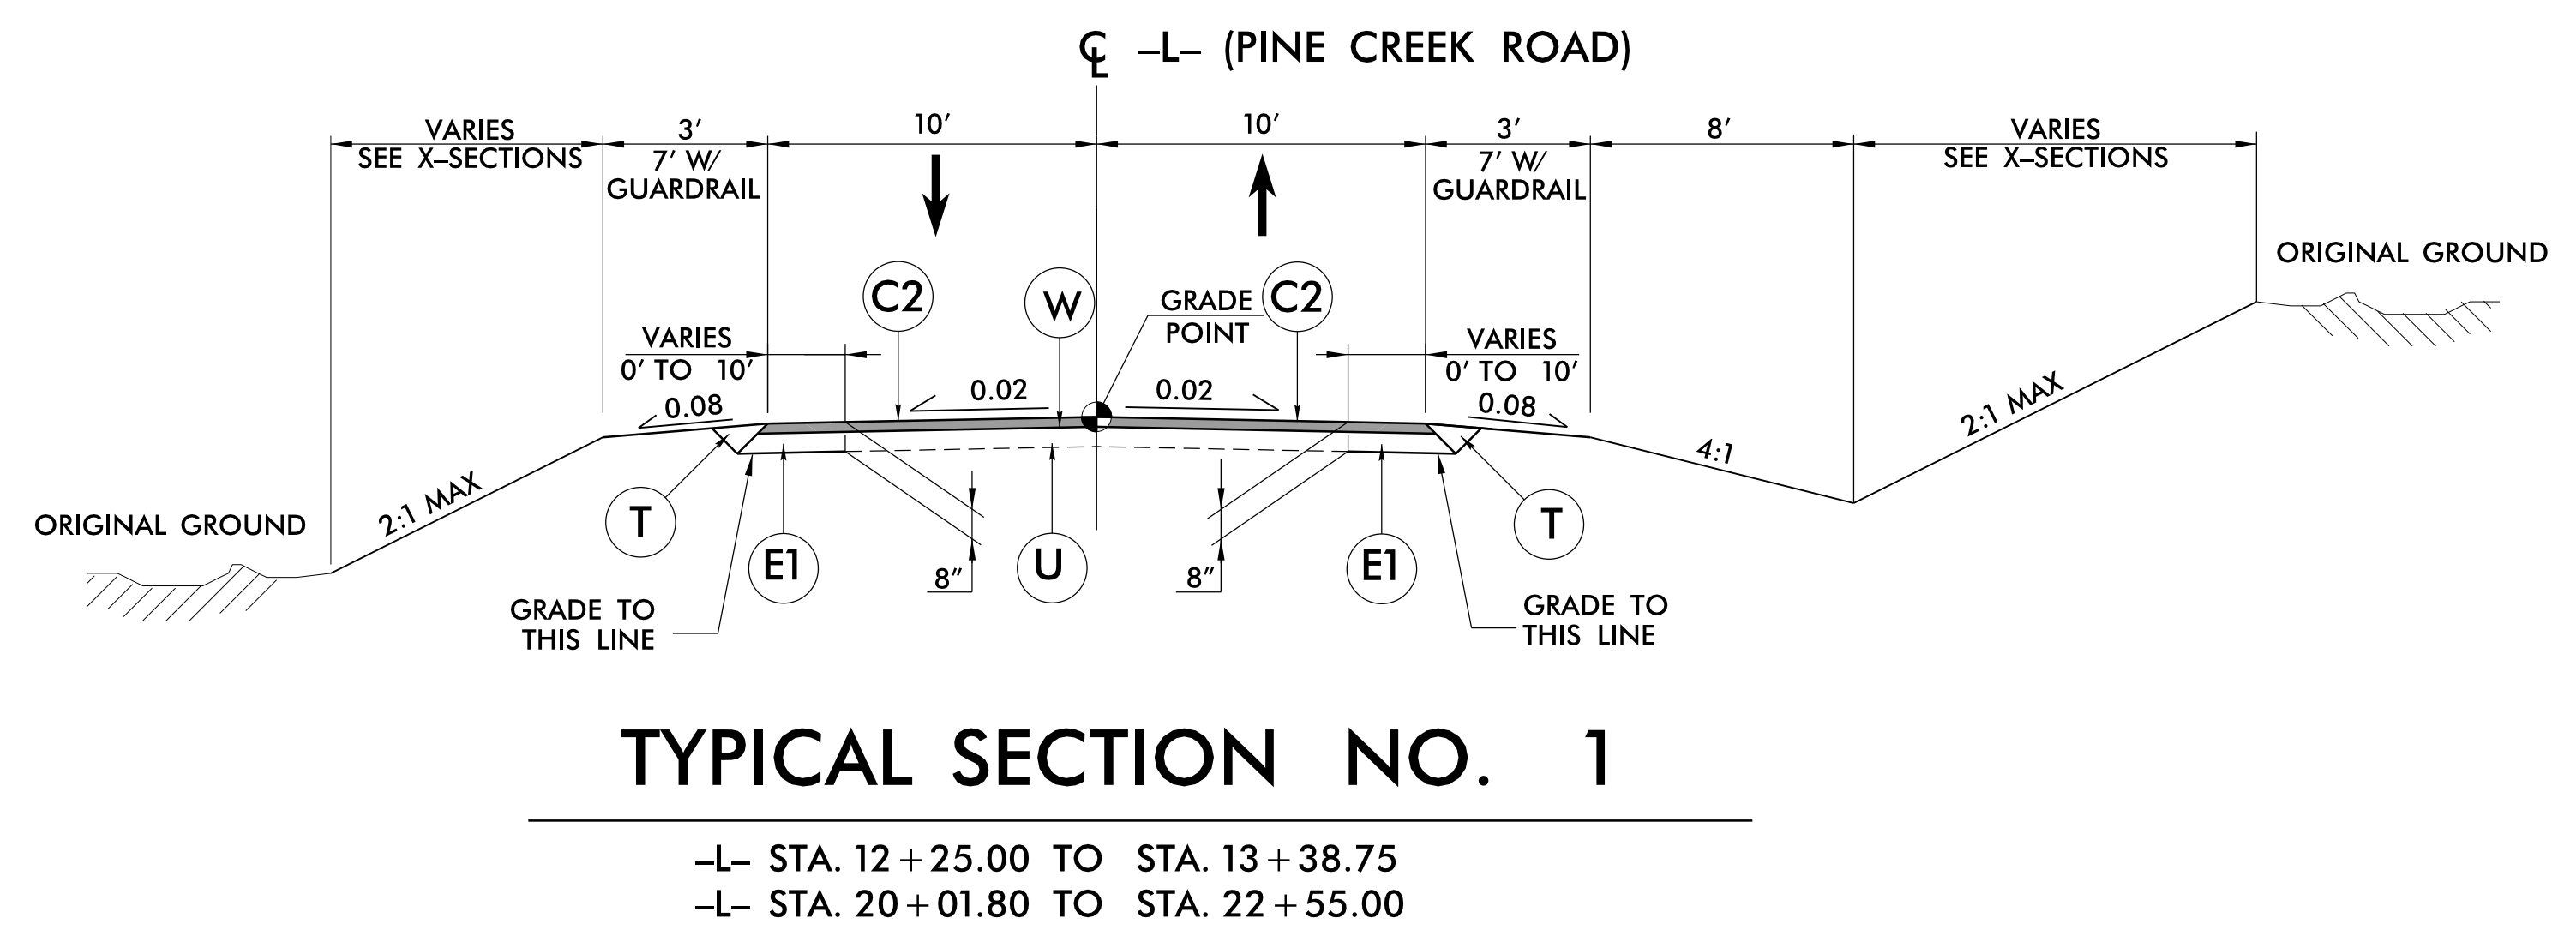

10/18/2015 5:02:47 PM TYP_02A-1.dgn