

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**

**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-4822 38592.1.1	1	7

**STATE OF NORTH CAROLINA**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
**GEOTECHNICAL ENGINEERING UNIT**

**STRUCTURE**  
**SUBSURFACE INVESTIGATION**

**CONTENTS**

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4, 5	CROSS SECTIONS
6, 7	BORE LOG REPORTS

PROJ. REFERENCE NO. 38592.1.1 F.A. PROJ. \_\_\_\_\_  
COUNTY TRANSYLVANIA  
PROJECT DESCRIPTION BRIDGE NO. 13 ON SR 1119 (SUGAR LOAF RD)  
OVER NICHOLSON CREEK

SITE DESCRIPTION \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**CAUTION NOTICE**

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE, THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

**PERSONNEL**

CJ COFFEY

DC ELLIOTT

DO CHEEK


INVESTIGATED BY JKUHNE

CHECKED BY \_\_\_\_\_

SUBMITTED BY JKUHNE

DATE 11/24/2014

DATE \_\_\_\_\_



DocuSigned by:

*Jody C. Kuhne*

3C0666A1BC400...

**ID: B-4822**

**PROJECT: 38592**

DRAWN BY: CJ COFFEY


NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
 GEOTECHNICAL ENGINEERING UNIT  
**SUBSURFACE INVESTIGATION**  
 SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION	GRADATION	ROCK DESCRIPTION	TERMS AND DEFINITIONS
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (ASTM T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6	WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.	HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:  WEATHERED ROCK (WR)  CRYSTALLINE ROCK (CR)  NON-CRYSTALLINE ROCK (NCR)  COASTAL PLAIN SEDIMENTARY ROCK (CP)	<b>ALLUVIUM (ALLUV.)</b> - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. <b>AQUIFER</b> - A WATER BEARING FORMATION OR STRATA. <b>ARENACEOUS</b> - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. <b>ARGILLACEOUS</b> - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. <b>ARTESIAN</b> - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. <b>CALCAREOUS (CALC.)</b> - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. <b>COLLUVIUM</b> - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. <b>CORE RECOVERY (REC.)</b> - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <b>DIKE</b> - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. <b>DIP</b> - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. <b>DIP DIRECTION (DIP AZIMUTH)</b> - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. <b>FAULT</b> - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. <b>FISSILE</b> - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. <b>FLOAT</b> - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. <b>FLOOD PLAIN (FP)</b> - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. <b>FORMATION (FM)</b> - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. <b>JOINT</b> - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. <b>LEDGE</b> - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. <b>LENS</b> - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. <b>MOTTLED (MOT.)</b> - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. <b>PERCHED WATER</b> - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. <b>RESIDUAL (RES.) SOIL</b> - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. <b>ROCK QUALITY DESIGNATION (RQD)</b> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <b>SAPROLITE (SAP.)</b> - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. <b>SILL</b> - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. <b>SLICKENSIDE</b> - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. <b>STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT)</b> - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. <b>STRATA CORE RECOVERY (SREC.)</b> - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. <b>STRATA ROCK QUALITY DESIGNATION (SROD)</b> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. <b>TOPSOIL (TS)</b> - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.
<b>SOIL LEGEND AND AASHTO CLASSIFICATION</b>	<b>ANGULARITY OF GRAINS</b> THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.	<b>WEATHERING</b>  FRESH VERY SLIGHT (V SL.) SLIGHT (SL.) MODERATE (MOD.) MODERATELY SEVERE (MOD. SEV.) SEVERE (SEV.) VERY SEVERE (V SEV.) COMPLETE	
<b>MINERALOGICAL COMPOSITION</b> MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.	<b>COMPRESSION</b> SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50	<b>WEATHERED ROCK (WR)</b> NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.  <b>CRYSTALLINE ROCK (CR)</b> FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.  <b>NON-CRYSTALLINE ROCK (NCR)</b> FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.  <b>COASTAL PLAIN SEDIMENTARY ROCK (CP)</b> COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.	
<b>PERCENTAGE OF MATERIAL</b>  ORGANIC MATERIAL TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10%	<b>GROUND WATER</b>  WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP	<b>MISCELLANEOUS SYMBOLS</b>  ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY	
<b>TEXTURE OR GRAIN SIZE</b>  U.S. STD. SIEVE SIZE OPENING (MM)  BOULDER (BLDR.) COBBLE (COB.) GRAVEL (GR.) COARSE SAND (CS, SD.) FINE SAND (F SD.) SILT (SL.) CLAY (CL.)	<b>RECOMMENDATION SYMBOLS</b>  UNDERCUT EXCAVATION SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK	<b>ABBREVIATIONS</b>  AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CLONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY  MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY  VST - VANE SHEAR TEST WEA. - WEATHERED % - UNIT WEIGHT %g - DRY UNIT WEIGHT  SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO	
<b>CONSISTENCY OR DENSENESS</b>  PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT <sup>2</sup> )	<b>EQUIPMENT USED ON SUBJECT PROJECT</b>  DRILL UNITS: CME-45C CME-55 CME-550 VANE SHEAR TEST PORTABLE HOIST  ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING w/ ADVANCER TRICONE * STEEL TEETH TRICONE * TUNG-CARB. CORE BIT  HAMMER TYPE: AUTOMATIC MANUAL  CORE SIZE: -B -H -N  HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST	<b>ROCK HARDNESS</b>  VERY HARD HARD MODERATELY HARD MEDIUM HARD SOFT VERY SOFT	
<b>SOIL MOISTURE - CORRELATION OF TERMS</b>  SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION			
<b>PLASTICITY</b>  NON PLASTIC SLIGHTLY PLASTIC MODERATELY PLASTIC HIGHLY PLASTIC			
<b>COLOR</b>  DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.			
		<b>FRACTURE SPACING</b>  TERM SPACING VERY WIDE MORE THAN 10 FEET WIDE 3 TO 10 FEET MODERATELY CLOSE 1 TO 3 FEET CLOSE 0.16 TO 1 FOOT VERY CLOSE LESS THAN 0.16 FEET	<b>BEDDING</b>  TERM THICKNESS VERY THICKLY BEDDED 4 FEET THICKLY BEDDED 1.5 - 4 FEET THINLY BEDDED 0.16 - 1.5 FEET VERY THINLY BEDDED 0.03 - 0.16 FEET THICKLY LAMINATED 0.008 - 0.03 FEET THINLY LAMINATED < 0.008 FEET
		<b>INDURATION</b>  FRIABLE MODERATELY INDURATED INDURATED EXTREMELY INDURATED	<b>INDURATION</b>  RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.
		<b>FRACURE SPACING</b>  TERM SPACING VERY WIDE MORE THAN 10 FEET WIDE 3 TO 10 FEET MODERATELY CLOSE 1 TO 3 FEET CLOSE 0.16 TO 1 FOOT VERY CLOSE LESS THAN 0.16 FEET	<b>BEDDING</b>  TERM THICKNESS VERY THICKLY BEDDED 4 FEET THICKLY BEDDED 1.5 - 4 FEET THINLY BEDDED 0.16 - 1.5 FEET VERY THINLY BEDDED 0.03 - 0.16 FEET THICKLY LAMINATED 0.008 - 0.03 FEET THINLY LAMINATED < 0.008 FEET
		<b>INDURATION</b>  FRIABLE MODERATELY INDURATED INDURATED EXTREMELY INDURATED	<b>INDURATION</b>  RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.
			<b>NOTES:</b>  BENCH MARK: -BL 2- CAP IN BASE AT STA 10+06.92 ELEVATION: 2112.54 FEET
			DATE: 8-15-14

PROJECT REFERENCE NO. SHEET	
B-4822 38592.11	
3 OF 7	
<b>SITE PLAN</b>	
0 10 20 FEET	
SKEW = 105 DEG	

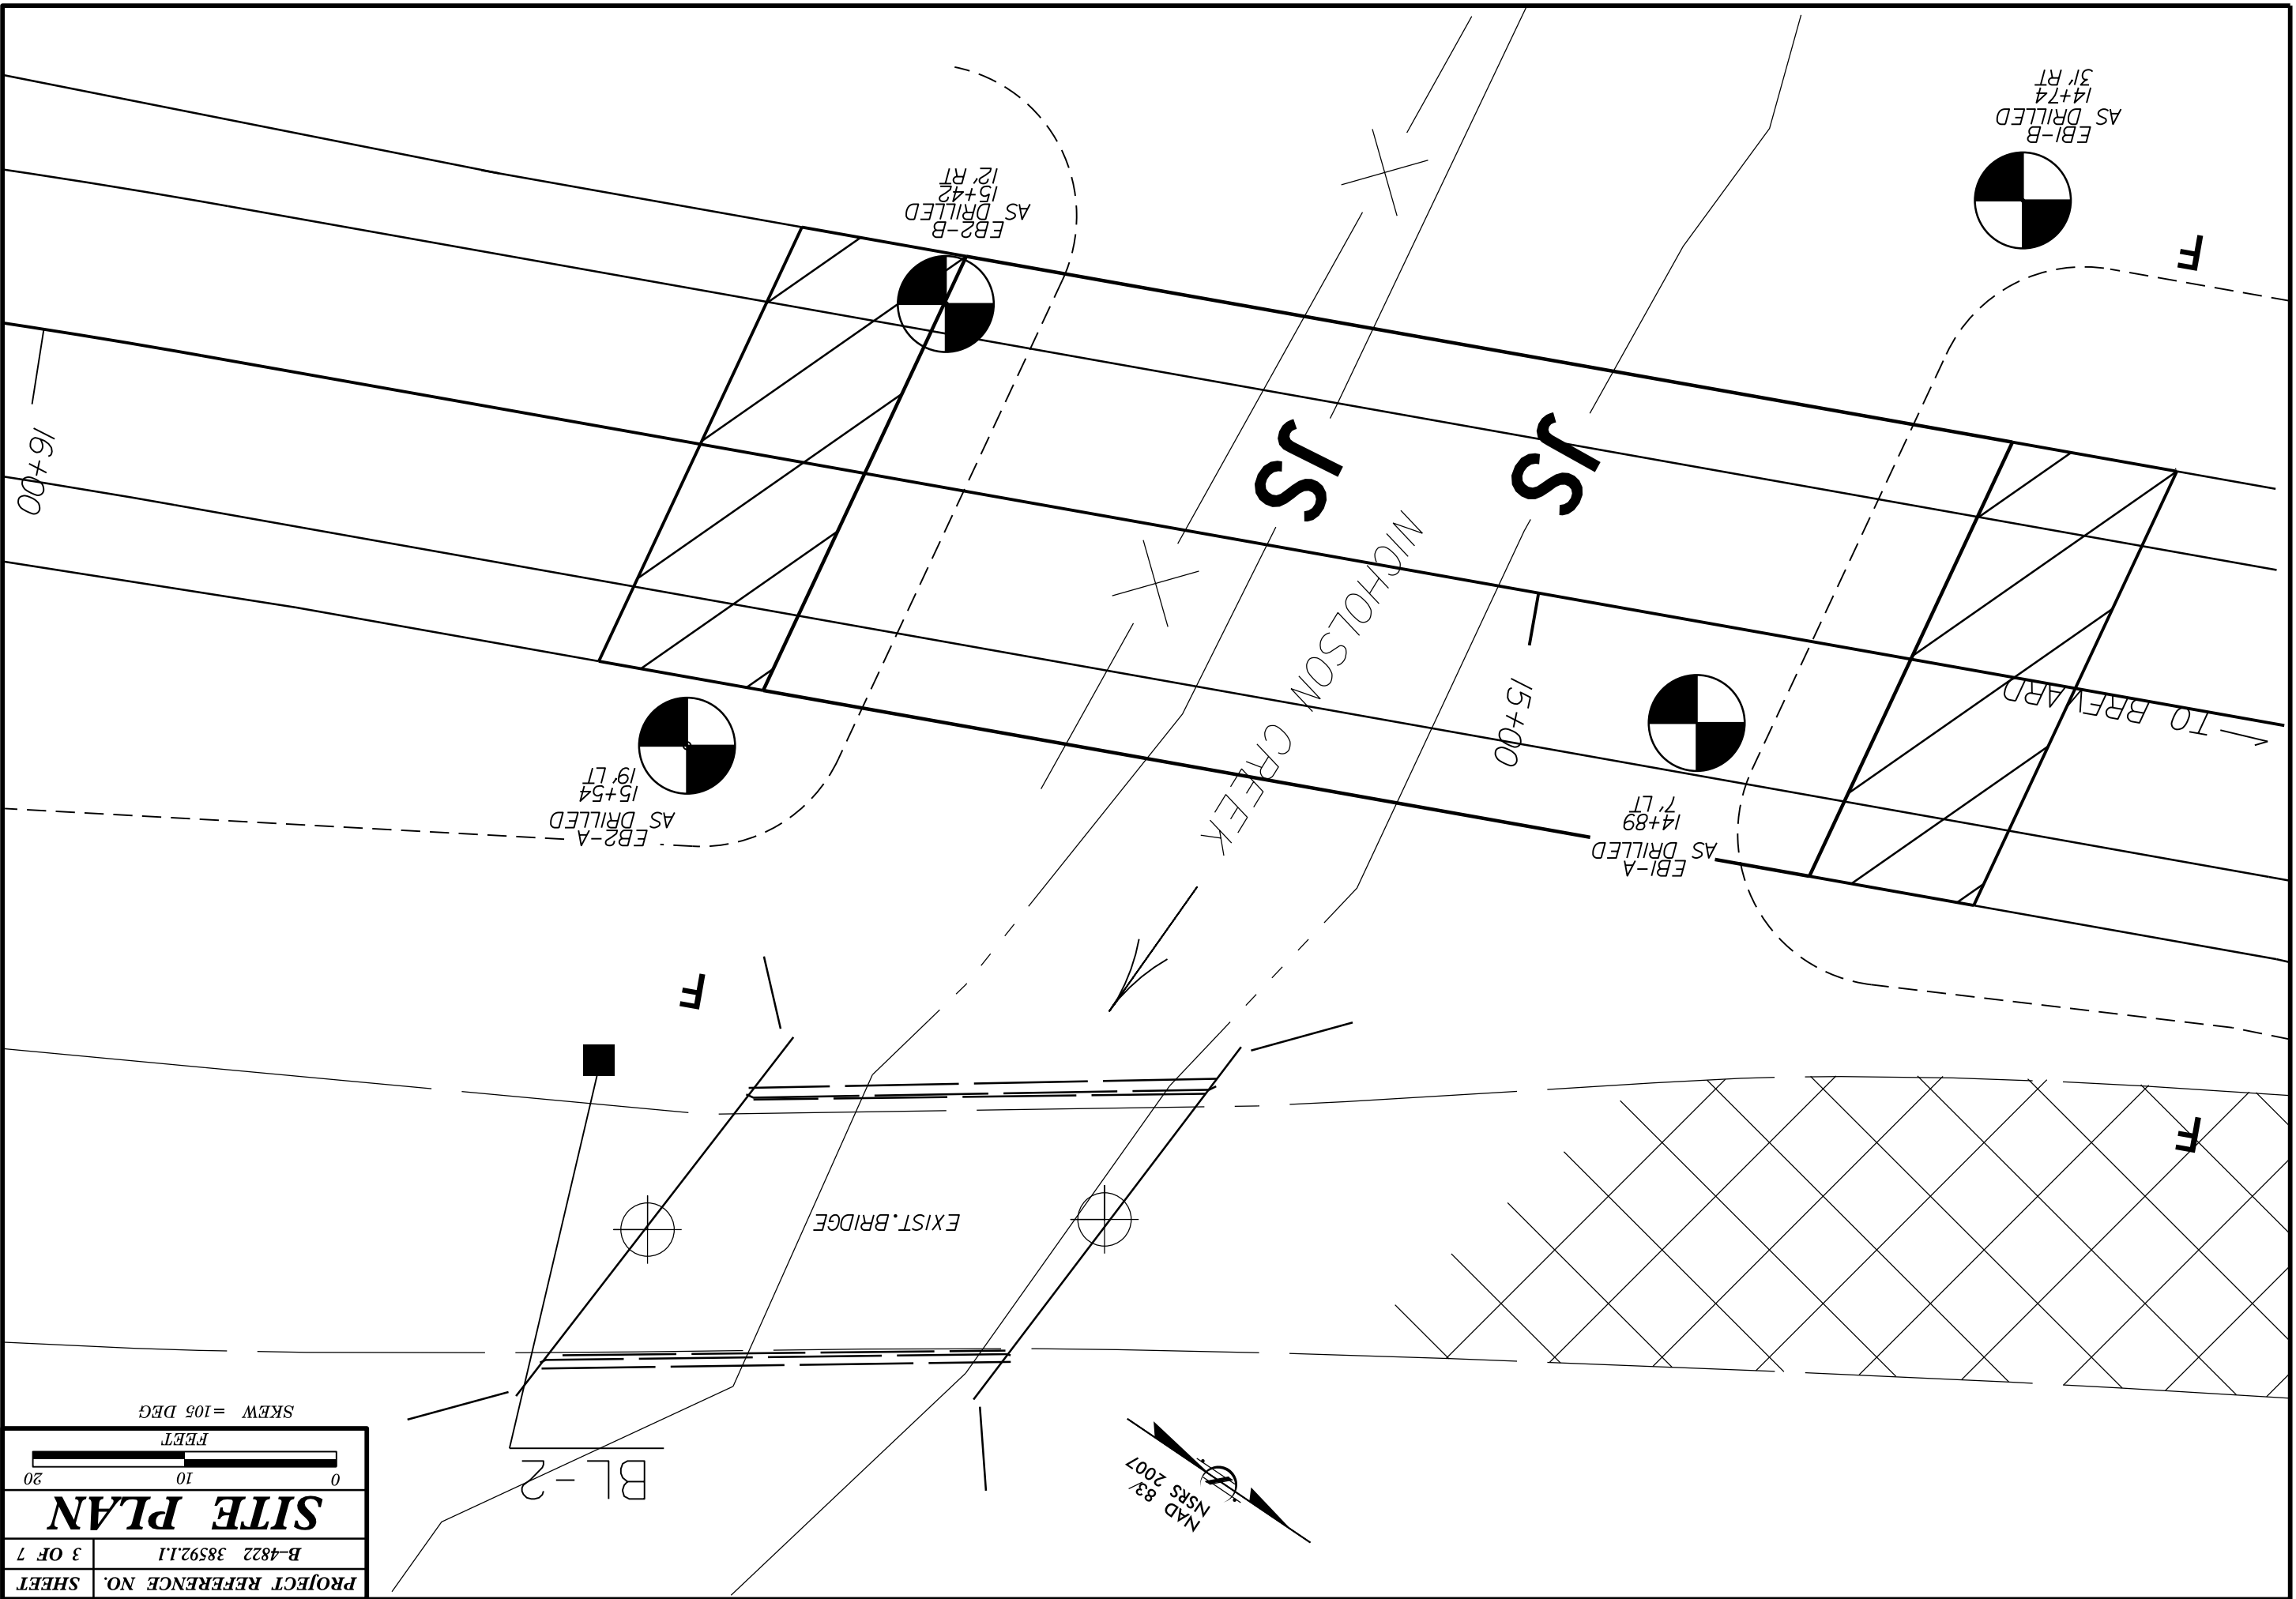

16+00

15+00

BL-2

EXIST. BRIDGE

NAD 83  
NSRS 2007

JS JS


NICHOLSON CREEK

EB1-B  
AS DRILLED  
14+74  
3 RT

EB1-A  
AS DRILLED  
14+89  
7 LT

EB2-A  
AS DRILLED  
15+54  
19 LT

EB2-B  
AS DRILLED  
15+42  
12 RT




F


F


F

← TO BREWARD




SKEW=105 DEG

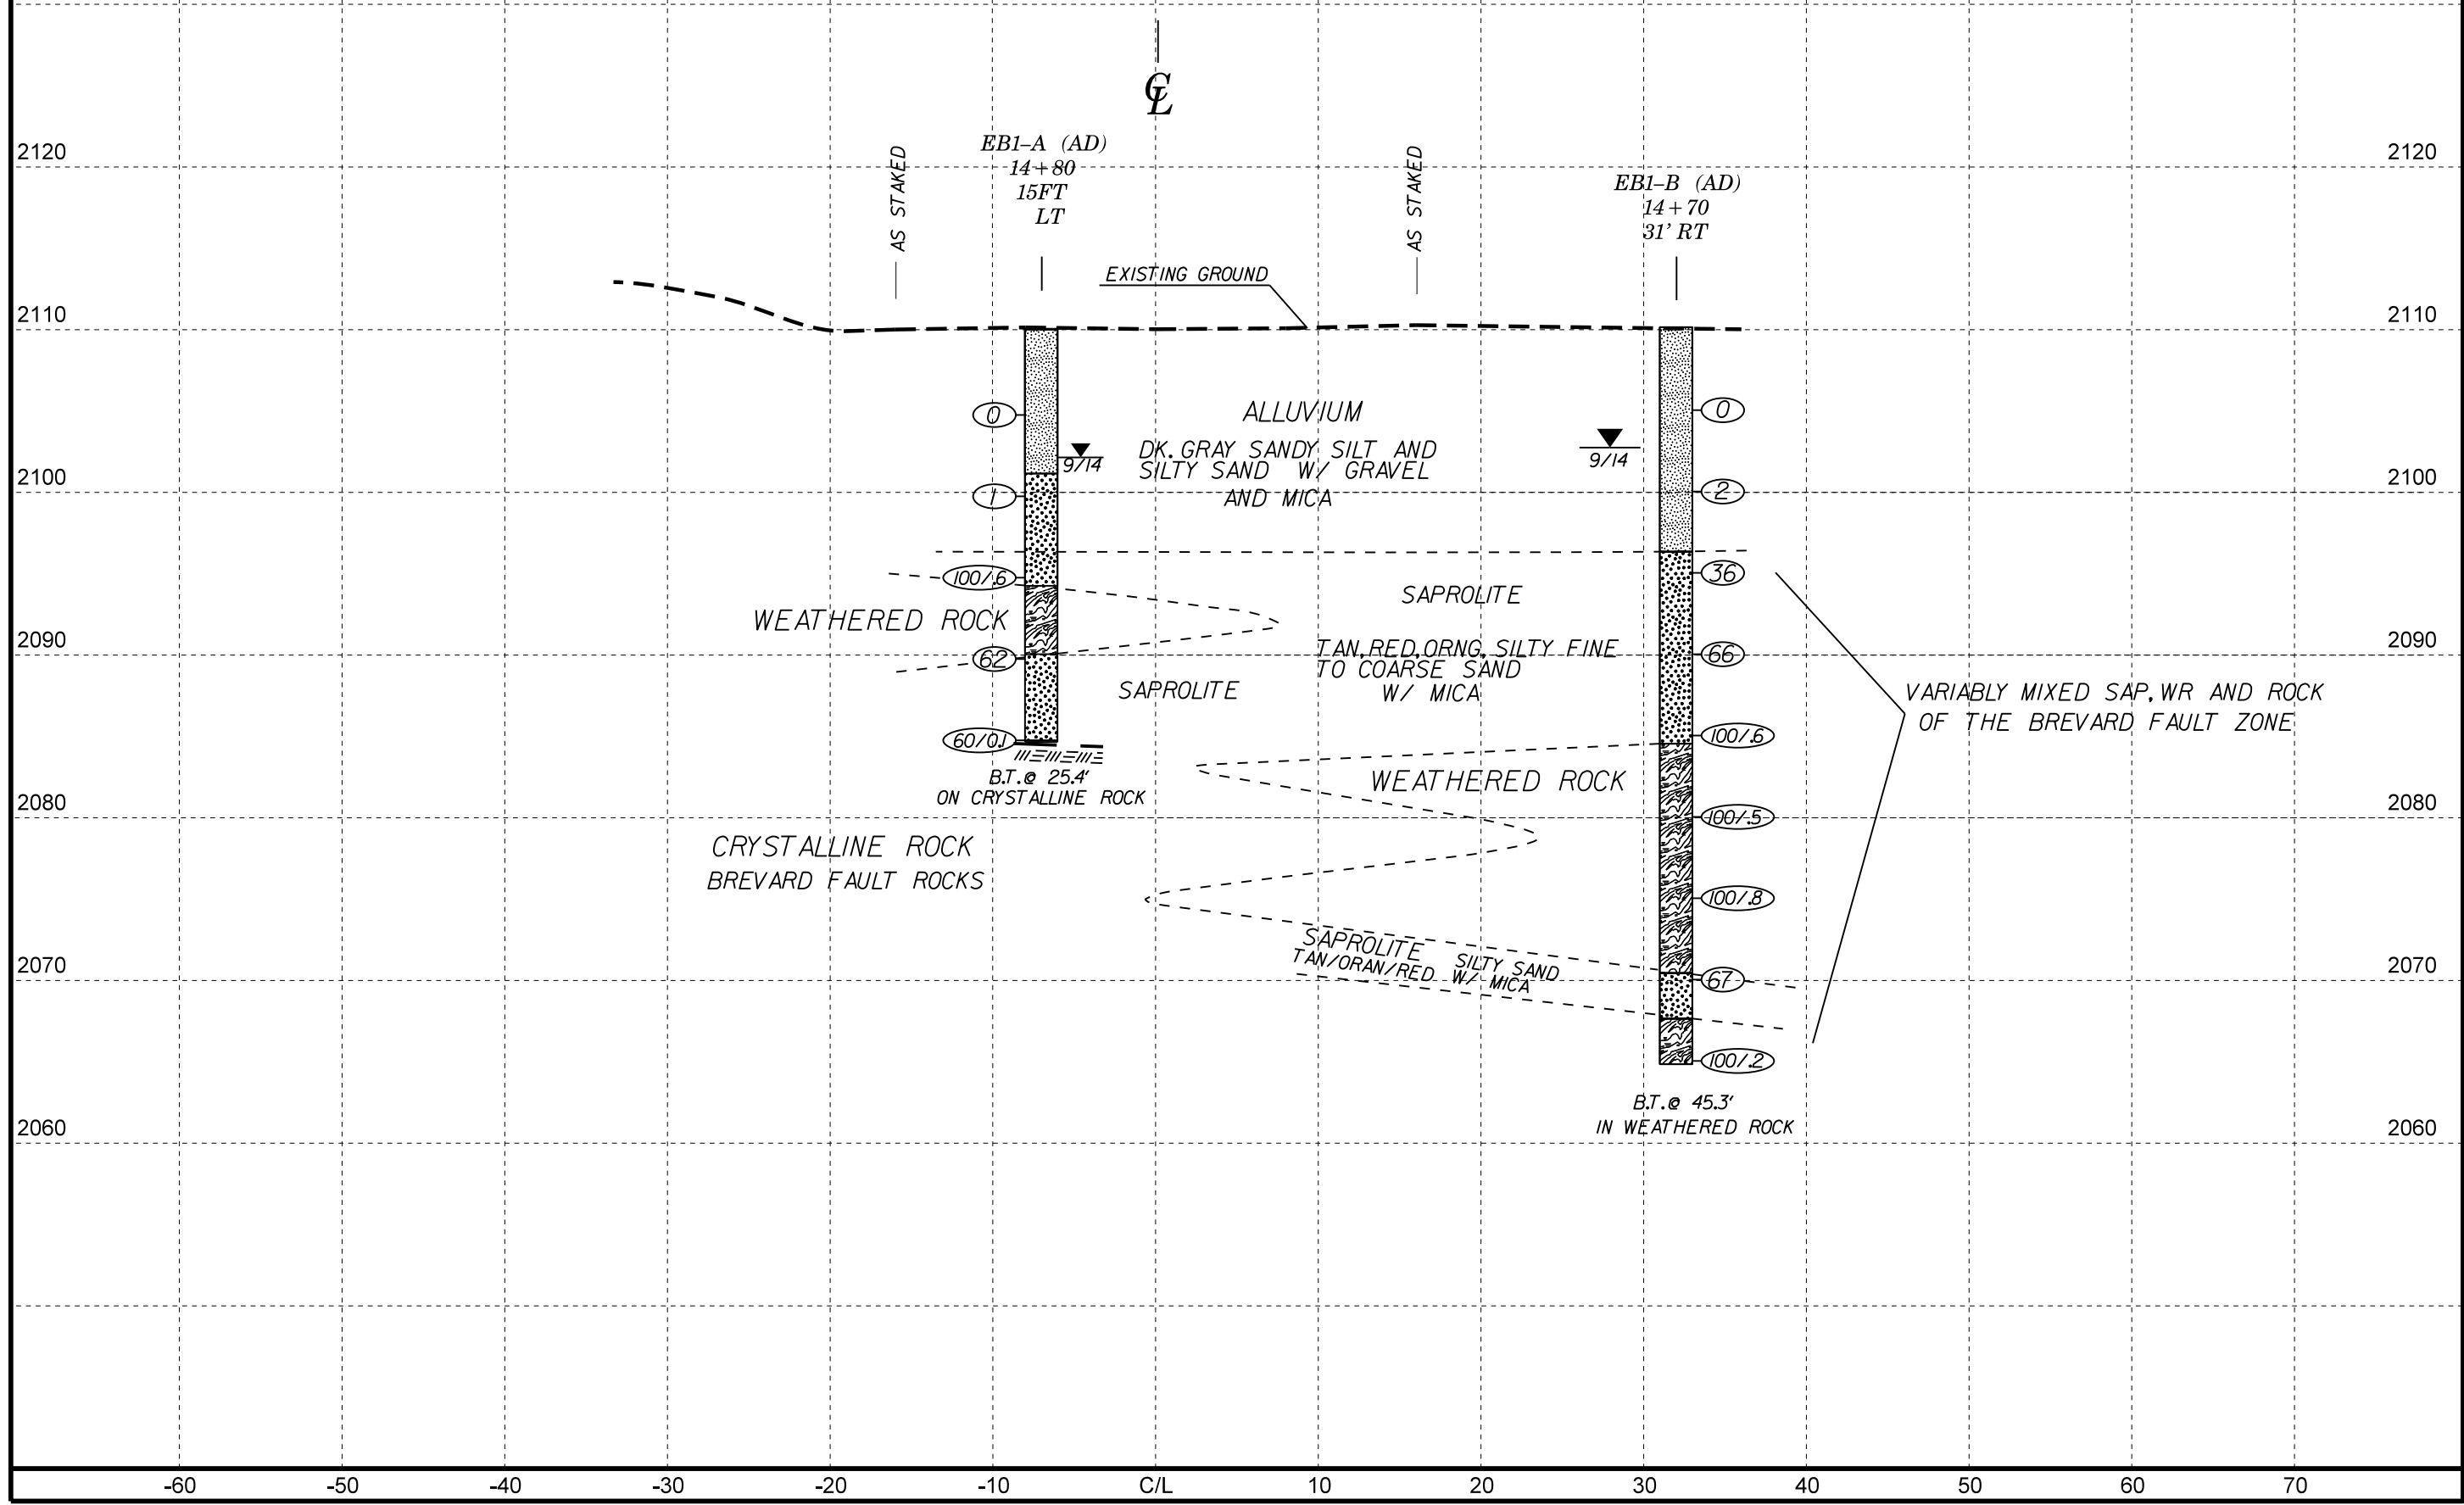

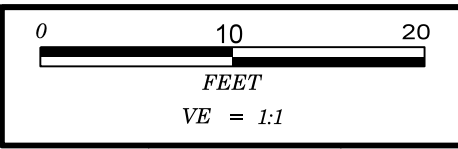

PROJECT REFERENCE NO.	SHEET
B-4822 38592.1.1	5 OF 7
<b>SECTION THROUGH EB-2</b>	

SKEW=105 DEG

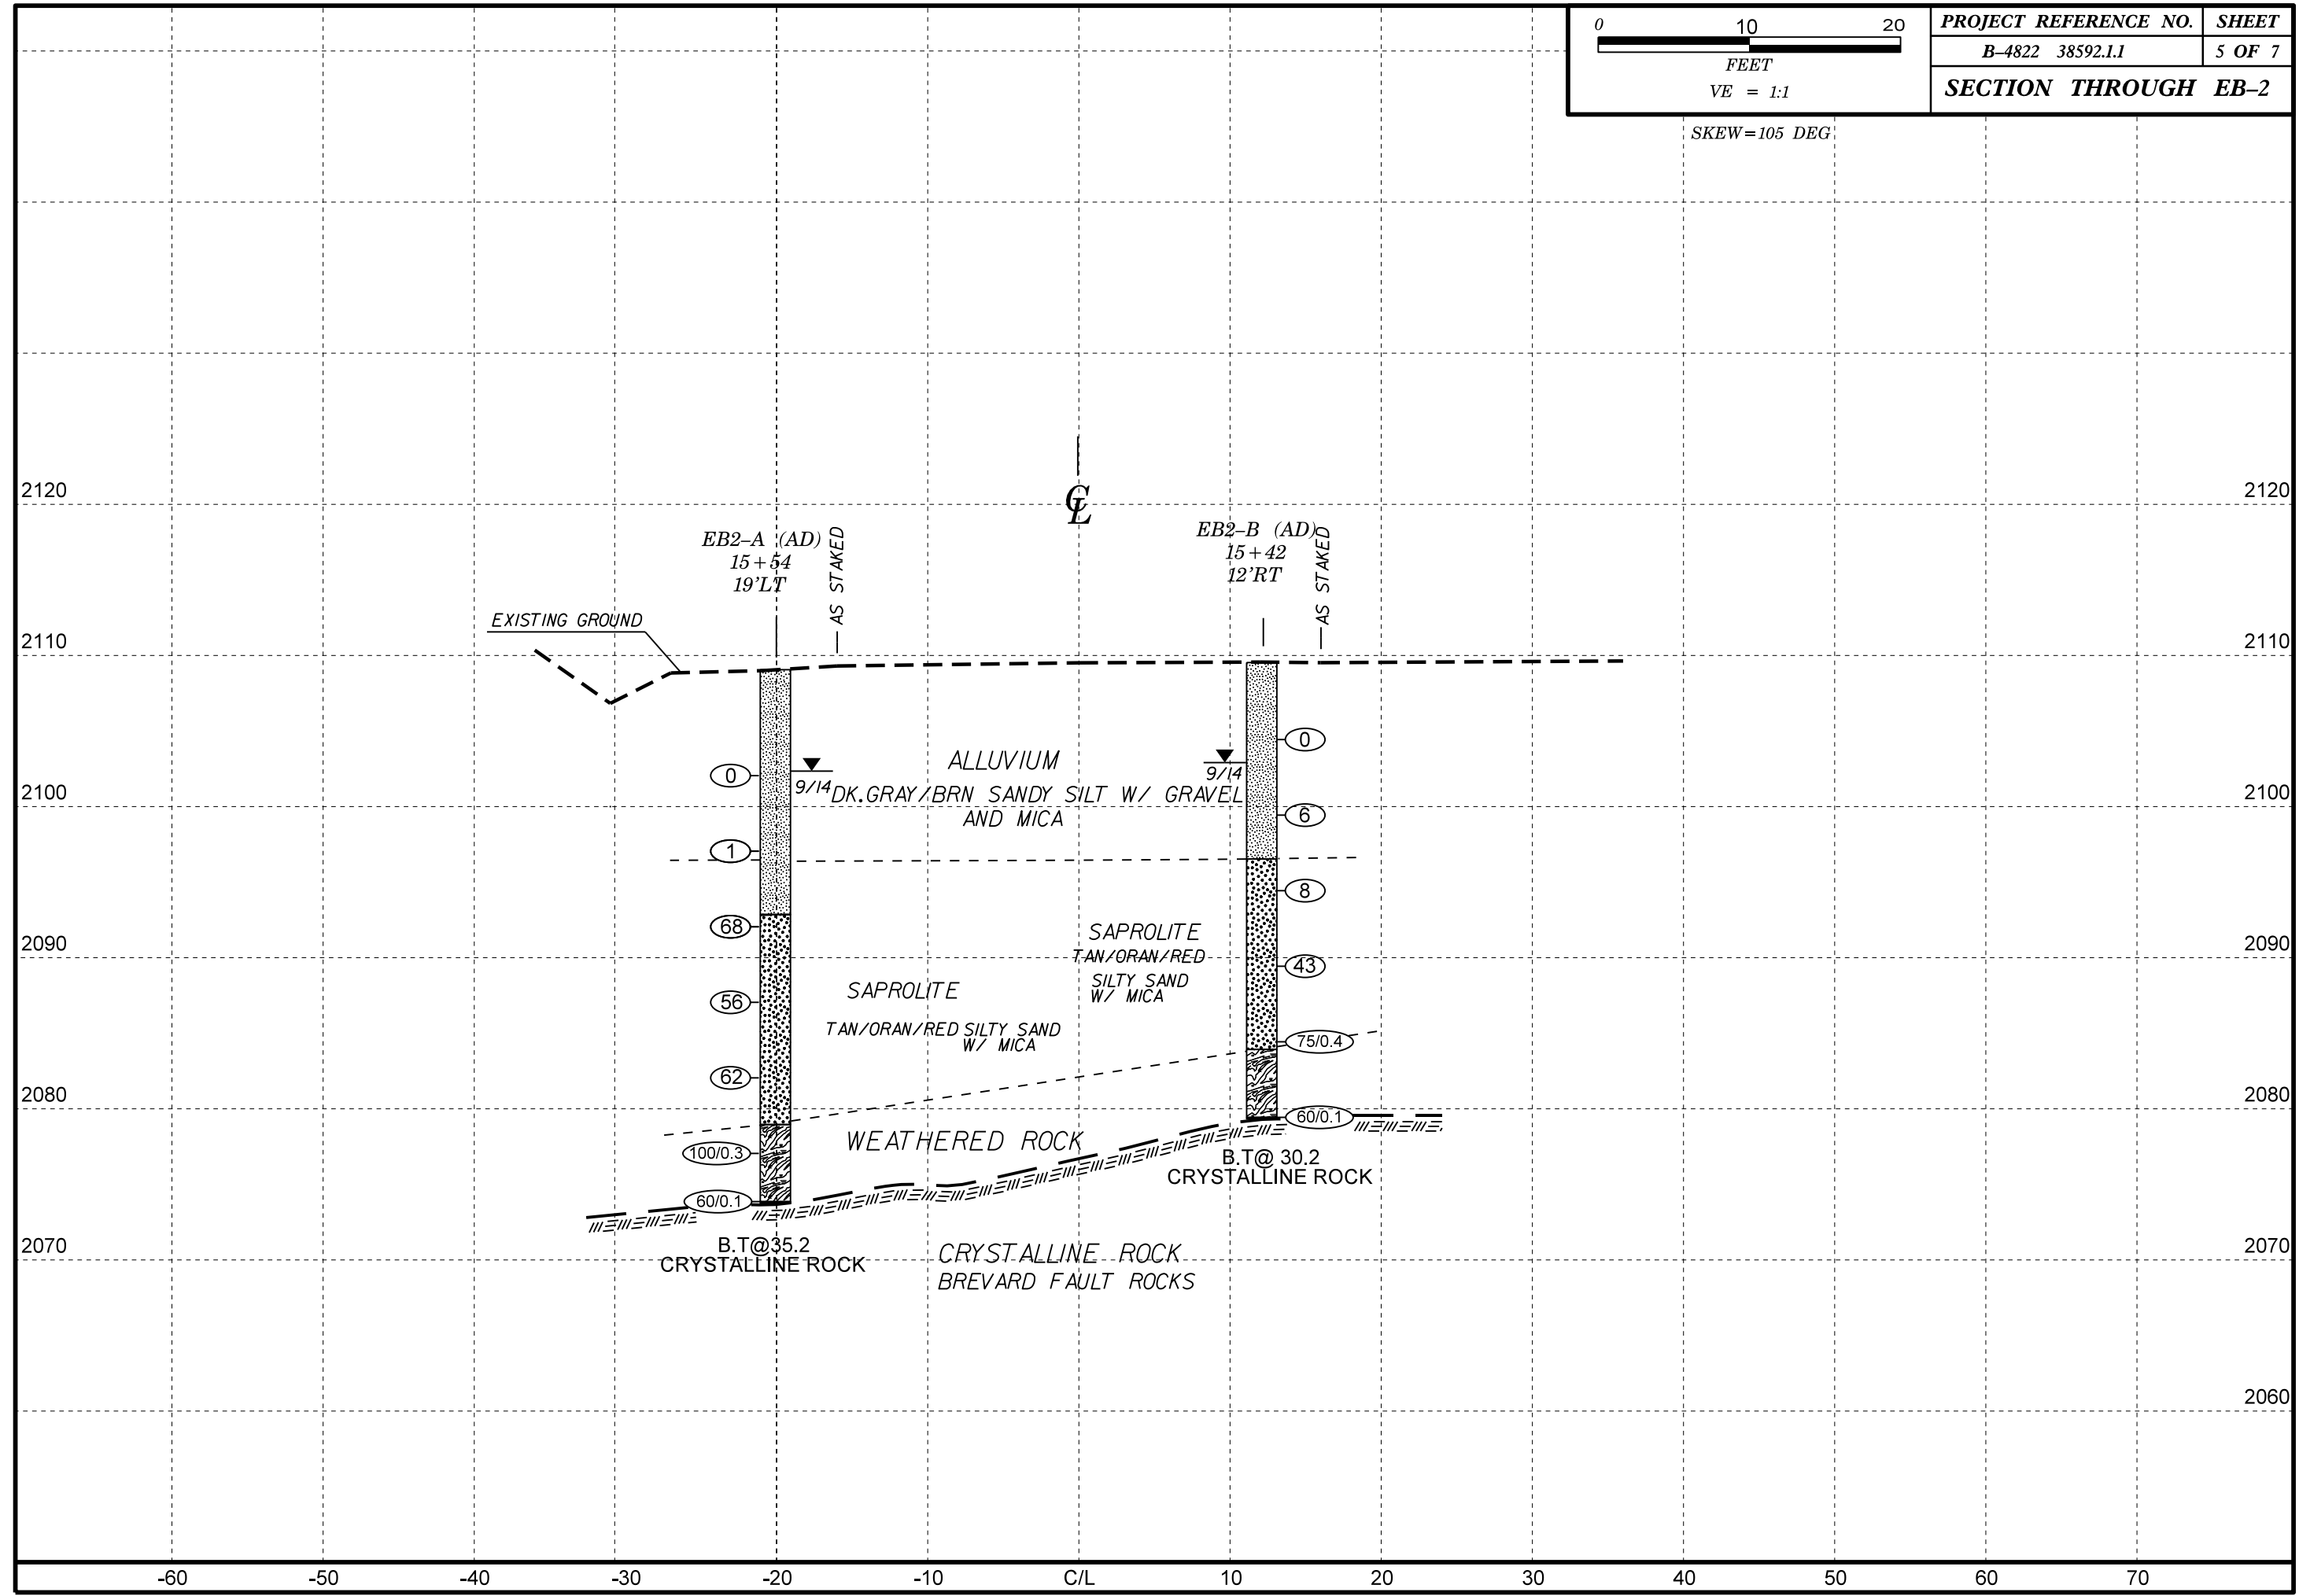

EB2-A (AD)  
15+54  
19'LT

EB2-B (AD)  
15+42  
12'RT

EXISTING GROUND

AS STAKED

AS STAKED

ALLUVIUM  
DK. GRAY / BRN SANDY SILT W/ GRAVEL  
AND MICA

SAPROLITE  
TAN / ORAN / RED SILTY SAND  
W/ MICA

WEATHERED ROCK

B.T@35.2  
CRYSTALLINE ROCK

CRYSTALLINE ROCK  
BREVARD FAULT ROCKS

SAPROLITE  
TAN / ORAN / RED  
SILTY SAND  
W/ MICA

B.T@30.2  
CRYSTALLINE ROCK

(0)

(1)

(68)

(56)

(62)

(100/0.3)

(60/0.1)

(0)

(6)

(8)

(43)

(75/0.4)

(60/0.1)

2120

2110

2100

2090

2080

2070

2120

2110

2100

2090

2080

2070

2060

-60 -50 -40 -30 -20 -10 C/L 10 20 30 40 50 60 70



# NCDOT GEOTECHNICAL ENGINEERING UNIT

## BORELOG REPORT

WBS 38592.1.1		TIP B-4822		COUNTY TRANSYLVANIA		GEOLOGIST DeLost, R.									
SITE DESCRIPTION Bridge No. 13 on SR 1119 (Sugar Loaf Rd.) over Nicholson Creek						GROUND WTR (ft)									
BORING NO. EB1-A		STATION 14+80		OFFSET 15 ft LT		ALIGNMENT -L-									
COLLAR ELEV. 2,109.9 ft		TOTAL DEPTH 25.4 ft		NORTHING 554,621		EASTING 886,580									
DRILL RIG/HAMMER EFF./DATE ICA0404 CME-45C 90.1% 08/26/2014		DRILL METHOD NW Casing w/ Advancer		HAMMER TYPE Automatic											
DRILLER Morgan, M.		START DATE 09/21/14		COMP. DATE 09/21/14		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2110														2,109.9	0.0
GROUND SURFACE															
ALLUVIAL															
Brown, dark gray, v. soft, micaceous, f. sandy, silt w/rool frags. (A-4).															
2105	2,104.6	5.3	WOH	WOH	WOH							SS-7	33%	2,101.0	8.9
Dark gray, multi-colored, v. loose, silty, f. sand/stream gravel (A-2-5).															
2100	2,099.6	10.3	WOH	WOH	1							Sat.		2,094.1	15.6
WEATHERED ROCK															
Weathered Rock (Gneiss)															
2095	2,094.6	15.3	6	33	67/0.1									2,089.9	20.0
RESIDUAL															
Tan, orange & red, v. dense, silty, micaceous, f. to cse. saprolitic sand (A-2-4).															
2090	2,089.6	20.3	47	36	26							Sat.		2,084.6	25.3
CRYSTALLINE ROCK															
Crystalline Rock (Gneiss)															
Boring Terminated with Standard Penetration Test Refusal at Elevation 2,084.5 ft in Crystalline Rock (Gneiss).															
2085	2,084.6	25.3	60/0.1											2,084.5	25.4

WBS 38592.1.1		TIP B-4822		COUNTY TRANSYLVANIA		GEOLOGIST DeLost, R.									
SITE DESCRIPTION Bridge No. 13 on SR 1119 (Sugar Loaf Rd.) over Nicholson Creek						GROUND WTR (ft)									
BORING NO. EB1-B		STATION 14+70		OFFSET 31 ft RT		ALIGNMENT -L-									
COLLAR ELEV. 2,109.7 ft		TOTAL DEPTH 45.3 ft		NORTHING 554,618		EASTING 886,549									
DRILL RIG/HAMMER EFF./DATE ICA0404 CME-45C 90.1% 08/26/2014		DRILL METHOD NW Casing w/ Advancer		HAMMER TYPE Automatic											
DRILLER Morgan, M.		START DATE 09/21/14		COMP. DATE 09/21/14		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2110														2,109.7	0.0
GROUND SURFACE															
ALLUVIAL															
Dark gray & brown, v. soft to soft, micaceous, f. sandy silt w/stream gravel (A-4).															
2105	2,104.6	5.1	WOH	WOH	WOH									2,095.9	13.8
RESIDUAL															
Tan, orange & red, dense to v. dense, silty, micaceous, f. to cse. saprolitic sand (A-2-4).															
2100	2,099.6	10.1	WOH	1	1									2,084.1	25.6
WEATHERED ROCK															
Weathered Rock (Gneiss)															
2095	2,094.6	15.1	8	14	22									2,070.0	39.7
RESIDUAL															
Tan, orange & red, very dense, silty, micaceous, f. to cse. saprolitic sand (A-2-4).															
2090	2,089.6	20.1	18	29	37									2,064.4	45.3
WEATHERED ROCK															
Weathered Rock (Gneiss)															
2085	2,084.6	25.1	71	29/0.1										2,064.4	45.3
WEATHERED ROCK															
Weathered Rock (Gneiss)															
2080	2,079.6	30.1	100/0.5												
Boring Terminated at Elevation 2,064.4 ft in Weathered Rock (Gneiss).															
2075	2,074.6	35.1	44	56/0.3											
2070	2,069.6	40.1	16	24	43										
2065	2,064.6	45.1	100/0.2												

NCDOT BORE DOUBLE B4822\_GEO\_RDWY\_BORE.GPJ NC\_DOT\_GDT 11/24/14



# NCDOT GEOTECHNICAL ENGINEERING UNIT

## BORELOG REPORT

WBS 38592.1.1	TIP B-4822	COUNTY TRANSYLVANIA	GEOLOGIST DeLost, R.
SITE DESCRIPTION Bridge No. 13 on SR 1119 (Sugar Loaf Rd.) over Nicholson Creek			GROUND WTR (ft)
BORING NO. EB2-A	STATION 15+54	OFFSET 19 ft LT	ALIGNMENT -L-
COLLAR ELEV. 2,109.2 ft	TOTAL DEPTH 35.2 ft	NORTHING 554,557	EASTING 886,609
DRILL RIG/HAMMER EFF./DATE ICA0404 CME-45C 90.1% 08/26/2014		DRILL METHOD NW Casing w/ Advancer	HAMMER TYPE Automatic
DRILLER Morgan, M.	START DATE 09/20/14	COMP. DATE 09/20/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													2,109.2 GROUND SURFACE	0.0
2105	2,104.1	5.1	WOH	WOH	WOH						SS-8	58% W	ALLUVIAL Dark gray & gray, very soft, f. sandy, mod. micaceous, silt w/root frags & stream gravel (A-4).	
2100	2,099.1	10.1	WOH	WOH	1							W		
2095	2,094.1	15.1	11	18	50							W	2,098.5 RESIDUAL	12.7
2090	2,089.1	20.1	21	30	26							W	Tan, orange & black, v. dense, silty, micaceous, f. to cse. saprolitic sand (A-2-4).	
2085	2,084.1	25.1	1	9	53							W		
2080	2,079.1	30.1	100/0.3									W	2,079.1 WEATHERED ROCK	30.1
2075	2,074.1	35.1	60/0.1										Weathered Rock (Gneiss)	
													2,074.1 CRYSTALLINE ROCK	35.1
													Crystalline Rock (Gneiss) Boring Terminated with Standard Penetration Test Refusal at Elevation 2,074.0 ft in Crystalline Rock (Gneiss). Boring backfilled upon completion due to proximity to livestock.	35.2

WBS 38592.1.1	TIP B-4822	COUNTY TRANSYLVANIA	GEOLOGIST DeLost, R.
SITE DESCRIPTION Bridge No. 13 on SR 1119 (Sugar Loaf Rd.) over Nicholson Creek			GROUND WTR (ft)
BORING NO. EB2-B	STATION 15+42	OFFSET 12 ft RT	ALIGNMENT -L-
COLLAR ELEV. 2,109.3 ft	TOTAL DEPTH 30.2 ft	NORTHING 554,554	EASTING 886,577
DRILL RIG/HAMMER EFF./DATE ICA0404 CME-45C 90.1% 08/26/2014		DRILL METHOD NW Casing w/ Advancer	HAMMER TYPE Automatic
DRILLER Morgan, M.	START DATE 09/21/14	COMP. DATE 09/21/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													2,109.3 GROUND SURFACE	0.0
2105	2,104.2	5.1	WOH	WOH	WOH						SS-9	27% Sat.	ALLUVIAL Brown & dark gray, v. soft to med. stiff, micaceous, sandy silt w/root frags (A-4).	
2100	2,099.2	10.1	1	2	4							Sat.		
2095	2,094.2	15.1	3	4	4							Sat.	2,096.3 RESIDUAL	13.0
2090	2,089.2	20.1	8	9	34							Sat.	Tan, orange & black, loose to dense, silty, f. to cse., saprolitic sand w/rock frags. (A-2-4).	
2085	2,084.2	25.1	25	75/0.4								Sat.	2,083.7 WEATHERED ROCK	25.6
2080	2,079.2	30.1	60/0.1										Weathered Rock (Gneiss)	30.1
													2,079.2 CRYSTALLINE ROCK	30.2
													Crystalline Rock (Gneiss) Boring Terminated with Standard Penetration Test Refusal at Elevation 2,079.1 ft in Crystalline Rock (Gneiss). Boring backfilled upon completion due to proximity to livestock.	

NCDOT BORE DOUBLE B4822\_GEO\_RDWY\_BORELOG\_NC\_DOT.GDT 11/24/14