

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	46118	1	8

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY TRANSYLVANIA
PROJECT DESCRIPTION REPLACE BRIDGE 196 OVER
CRAB CREEK ON SR 1532

SITE DESCRIPTION _____

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4-5	CROSS SECTIONS
6-8	BORE LOGS

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
1. THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 2. BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

DC ELLIOTT

DO CHEEK

CJ COFFEE

INVESTIGATED BY DM MULLEN

DRAWN BY DM MULLEN


CHECKED BY JC KUHNE

SUBMITTED BY DM MULLEN

DATE 12.29.2014

REFERENCE: 46118

PROJECT: B-5403






197737B5B9764F6...
12/30/2014

SIGNATURE DATE

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION												GRADATION												ROCK DESCRIPTION												TERMS AND DEFINITIONS																																																																																																																																																																																																																																															
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (ASTM T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>												WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.												HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:												ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOOD - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (ROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.																																																																																																																																																																																																																																															
SOIL LEGEND AND AASHTO CLASSIFICATION												MINERALOGICAL COMPOSITION												WEATHERING												WEATHERING																																																																																																																																																																																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="6">GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th colspan="6">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="6">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>A-1</th> <th>A-2</th> <th>A-3</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-3</th> <th>A-4, A-5</th> <th>A-6, A-7</th> <th colspan="6"></th> </tr> <tr> <th>SYMBOL</th> <td colspan="2">[Pattern]</td> <td colspan="2">[Pattern]</td> <td colspan="2">[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td colspan="6"></td> </tr> <tr> <th>% PASSING #10 #200</th> <td>50 MX</td> <td>30 MX</td> <td>15 MX</td> <td>25 MX</td> <td>10 MN</td> <td>5 MN</td> <td>10 MN</td> <td>5 MN</td> <td>10 MN</td> <td>5 MN</td> <td>10 MN</td> <td>5 MN</td> <td colspan="6"></td> </tr> <tr> <th>MATERIAL PASSING #40 #200</th> <td>LL</td> <td>PI</td> <td colspan="4"></td> <td colspan="4"></td> <td colspan="4"></td> <td colspan="6"></td> </tr> <tr> <th>GROUP INDEX</th> <td colspan="2">0</td> <td colspan="2">0</td> <td colspan="2">0</td> <td colspan="2">0</td> <td colspan="2">0</td> <td colspan="2">0</td> <td colspan="6"></td> </tr> <tr> <th>USUAL TYPES OF MAJOR MATERIALS</th> <td colspan="2">STONE FRAGS. OF GRAVEL AND SAND</td> <td colspan="2">FINE SAND</td> <td colspan="2">SILTY OR CLAYEY GRAVEL AND SAND</td> <td colspan="2">SILTY SOILS</td> <td colspan="2">CLAYEY SOILS</td> <td colspan="2">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> <td colspan="6">HIGHLY ORGANIC SOILS</td> </tr> <tr> <th>GEN. RATING AS SUBGRADE</th> <td colspan="6">EXCELLENT TO GOOD</td> <td colspan="6">FAIR TO POOR</td> <td colspan="2">FAIR TO POOR</td> <td colspan="2">POOR</td> <td colspan="6">UNSATURABLE</td> </tr> <tr> <td colspan="12">PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30</td> <td colspan="12"></td> <td colspan="12"></td> <td colspan="12"></td> </tr> </table>												GRANULAR MATERIALS (≤ 35% PASSING #200)						SILT-CLAY MATERIALS (> 35% PASSING #200)						ORGANIC MATERIALS						GROUP CLASS.	A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7							SYMBOL	[Pattern]		[Pattern]		[Pattern]		[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]							% PASSING #10 #200	50 MX	30 MX	15 MX	25 MX	10 MN	5 MN	10 MN	5 MN	10 MN	5 MN	10 MN	5 MN							MATERIAL PASSING #40 #200	LL	PI																			GROUP INDEX	0		0		0		0		0		0								USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. OF GRAVEL AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS		CLAYEY SOILS		SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS						GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD						FAIR TO POOR						FAIR TO POOR		POOR		UNSATURABLE						PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30																																																ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.												WEATHERED ROCK (WR) NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.												CRYSTALLINE ROCK (CR) FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.												NON-CRYSTALLINE ROCK (NCR) FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.												COASTAL PLAIN SEDIMENTARY ROCK (CPS) COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.											
GRANULAR MATERIALS (≤ 35% PASSING #200)						SILT-CLAY MATERIALS (> 35% PASSING #200)						ORGANIC MATERIALS																																																																																																																																																																																																																																																																							
GROUP CLASS.	A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7																																																																																																																																																																																																																																																																								
SYMBOL	[Pattern]		[Pattern]		[Pattern]		[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]																																																																																																																																																																																																																																																																							
% PASSING #10 #200	50 MX	30 MX	15 MX	25 MX	10 MN	5 MN	10 MN	5 MN	10 MN	5 MN	10 MN	5 MN																																																																																																																																																																																																																																																																							
MATERIAL PASSING #40 #200	LL	PI																																																																																																																																																																																																																																																																																	
GROUP INDEX	0		0		0		0		0		0																																																																																																																																																																																																																																																																								
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. OF GRAVEL AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS		CLAYEY SOILS		SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS																																																																																																																																																																																																																																																																						
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD						FAIR TO POOR						FAIR TO POOR		POOR		UNSATURABLE																																																																																																																																																																																																																																																																		
PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30																																																																																																																																																																																																																																																																																			
CONSISTENCY OR DENSENESS												GROUND WATER												MISCELLANEOUS SYMBOLS												RECOMMENDATION SYMBOLS																																																																																																																																																																																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TENS./FT²)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td> <td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td> </tr> </table>												PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TENS./FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP 												ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY 												UNDERCUT EXCAVATION SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK 																																																																																																																																																																																																																																			
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TENS./FT ²)																																																																																																																																																																																																																																																																																
GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																																																																																																																																																																																																
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																																																																																																																																																																
TEXTURE OR GRAIN SIZE												ABBREVIATIONS												ROCK HARDNESS												SOIL MOISTURE - CORRELATION OF TERMS																																																																																																																																																																																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <td>4</td> <td>10</td> <td>40</td> <td>60</td> <td>200</td> <td>270</td> </tr> <tr> <th></th> <td>4.75</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CS, SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td>GRAIN SIZE</td> <td>MM</td> <td>305</td> <td>75</td> <td>2.0</td> <td>0.25</td> <td>0.05</td> <td>0.005</td> </tr> <tr> <td></td> <td>IN.</td> <td>12</td> <td>3</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>												U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.75	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CS, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005		IN.	12	3					AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - COARSE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST o - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY MED. - MEDIUM MICA. - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY VST - VANE SHEAR TEST WEA. - WEATHERED WU - UNIT WEIGHT WU - DRY UNIT WEIGHT												VERY HARD - CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD - CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD - CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD - CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT - CAN BE GROOVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT - CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.												<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL - LIQUID LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>PLASTIC RANGE (PI)</td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OM - OPTIMUM MOISTURE</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>SL - SHRINKAGE LIMIT</td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>												SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	PLASTIC RANGE (PI)	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																																																																																																																																																																													
	4.75	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																																																																																																																													
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CS, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																																																																																																																													
GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005																																																																																																																																																																																																																																																																												
	IN.	12	3																																																																																																																																																																																																																																																																																
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																																																																																																																																																																	
LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																																																																																																																																																																	
PLASTIC RANGE (PI)	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																	
OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																	
SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																	
PLASTICITY												EQUIPMENT USED ON SUBJECT PROJECT												FRACTURE SPACING												BEDDING																																																																																																																																																																																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">PLASTICITY INDEX (PI)</th> <th colspan="2">DRY STRENGTH</th> </tr> <tr> <td>NON PLASTIC</td> <td>0-5</td> <td>VERY LOW</td> <td></td> </tr> <tr> <td>SLIGHTLY PLASTIC</td> <td>6-15</td> <td>SLIGHT</td> <td></td> </tr> <tr> <td>MODERATELY PLASTIC</td> <td>16-25</td> <td>MEDIUM</td> <td></td> </tr> <tr> <td>HIGHLY PLASTIC</td> <td>26 OR MORE</td> <td>HIGH</td> <td></td> </tr> </table>												PLASTICITY INDEX (PI)		DRY STRENGTH		NON PLASTIC	0-5	VERY LOW		SLIGHTLY PLASTIC	6-15	SLIGHT		MODERATELY PLASTIC	16-25	MEDIUM		HIGHLY PLASTIC	26 OR MORE	HIGH		DRILL UNITS: <input checked="" type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST <input type="checkbox"/> _____ <input type="checkbox"/> _____												ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input checked="" type="checkbox"/> CASING <input checked="" type="checkbox"/> W/ ADVANCER <input type="checkbox"/> TRICONE _____ * STEEL TEETH <input type="checkbox"/> TRICONE _____ * TUNG-CARB. <input type="checkbox"/> CORE BIT <input type="checkbox"/> _____												<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td></td> <td></td> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table>												TERM	SPACING	TERM	THICKNESS	VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET	WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET	CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET	VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET			THINLY LAMINATED	< 0.008 FEET	INDURATION FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC. FRIABLE - RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. MODERATELY INDURATED - GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. INDURATED - GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. EXTREMELY INDURATED - SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																																			
PLASTICITY INDEX (PI)		DRY STRENGTH																																																																																																																																																																																																																																																																																	
NON PLASTIC	0-5	VERY LOW																																																																																																																																																																																																																																																																																	
SLIGHTLY PLASTIC	6-15	SLIGHT																																																																																																																																																																																																																																																																																	
MODERATELY PLASTIC	16-25	MEDIUM																																																																																																																																																																																																																																																																																	
HIGHLY PLASTIC	26 OR MORE	HIGH																																																																																																																																																																																																																																																																																	
TERM	SPACING	TERM	THICKNESS																																																																																																																																																																																																																																																																																
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET																																																																																																																																																																																																																																																																																
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET																																																																																																																																																																																																																																																																																
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET																																																																																																																																																																																																																																																																																
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																																																																																																																																																																																																
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET																																																																																																																																																																																																																																																																																
		THINLY LAMINATED	< 0.008 FEET																																																																																																																																																																																																																																																																																
COLOR																																				NOTES:																																																																																																																																																																																																																																															
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																																				BENCH MARK: BM-2 ELEVATION: 2107.06 FEET																																																																																																																																																																																																																																															

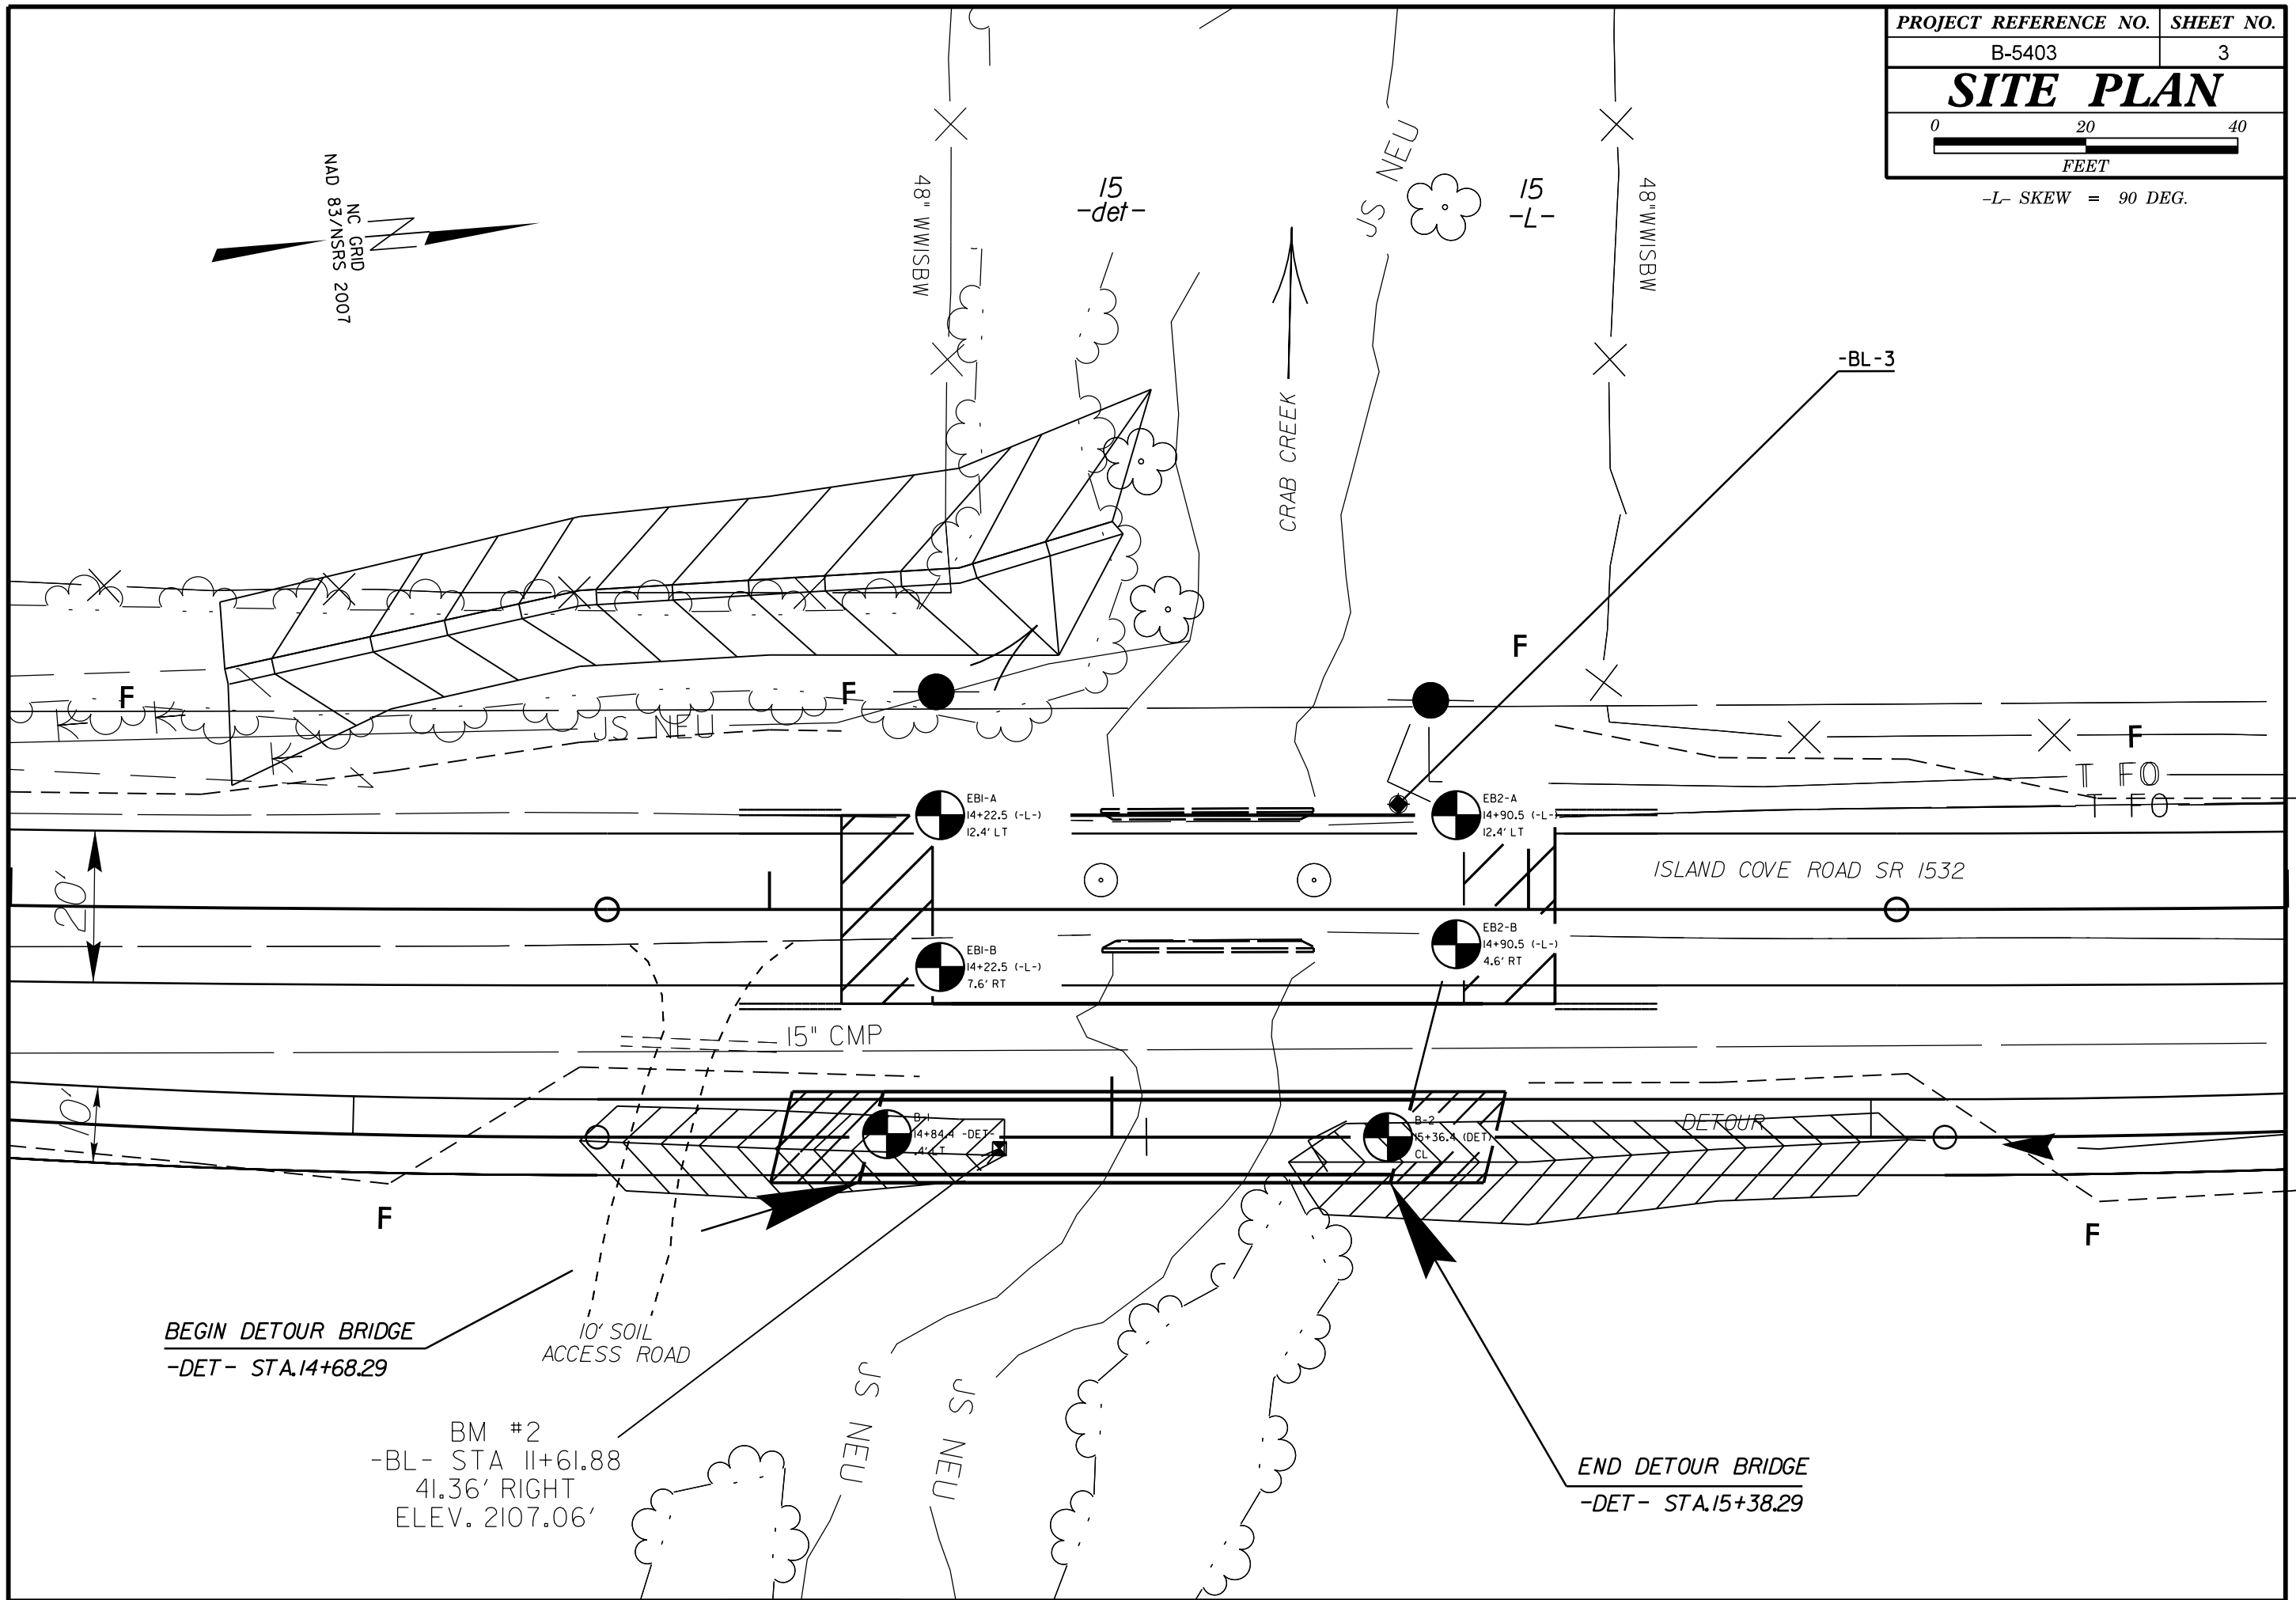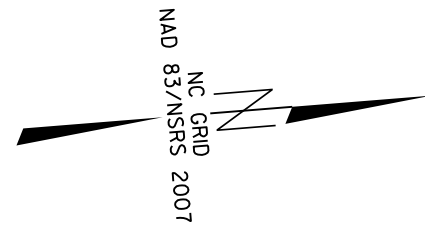




VE = 1H = 1V

-L- SKEW = 90 DEG.

2150
2140
2130
2120
2110
2100
2090
2080
2070
2060

2140
2130
2120
2110
2100
2090
2080
2070
2060

-60 -50 -40 -30 -20 -10 C/L 10 20 30 40 50 60 70

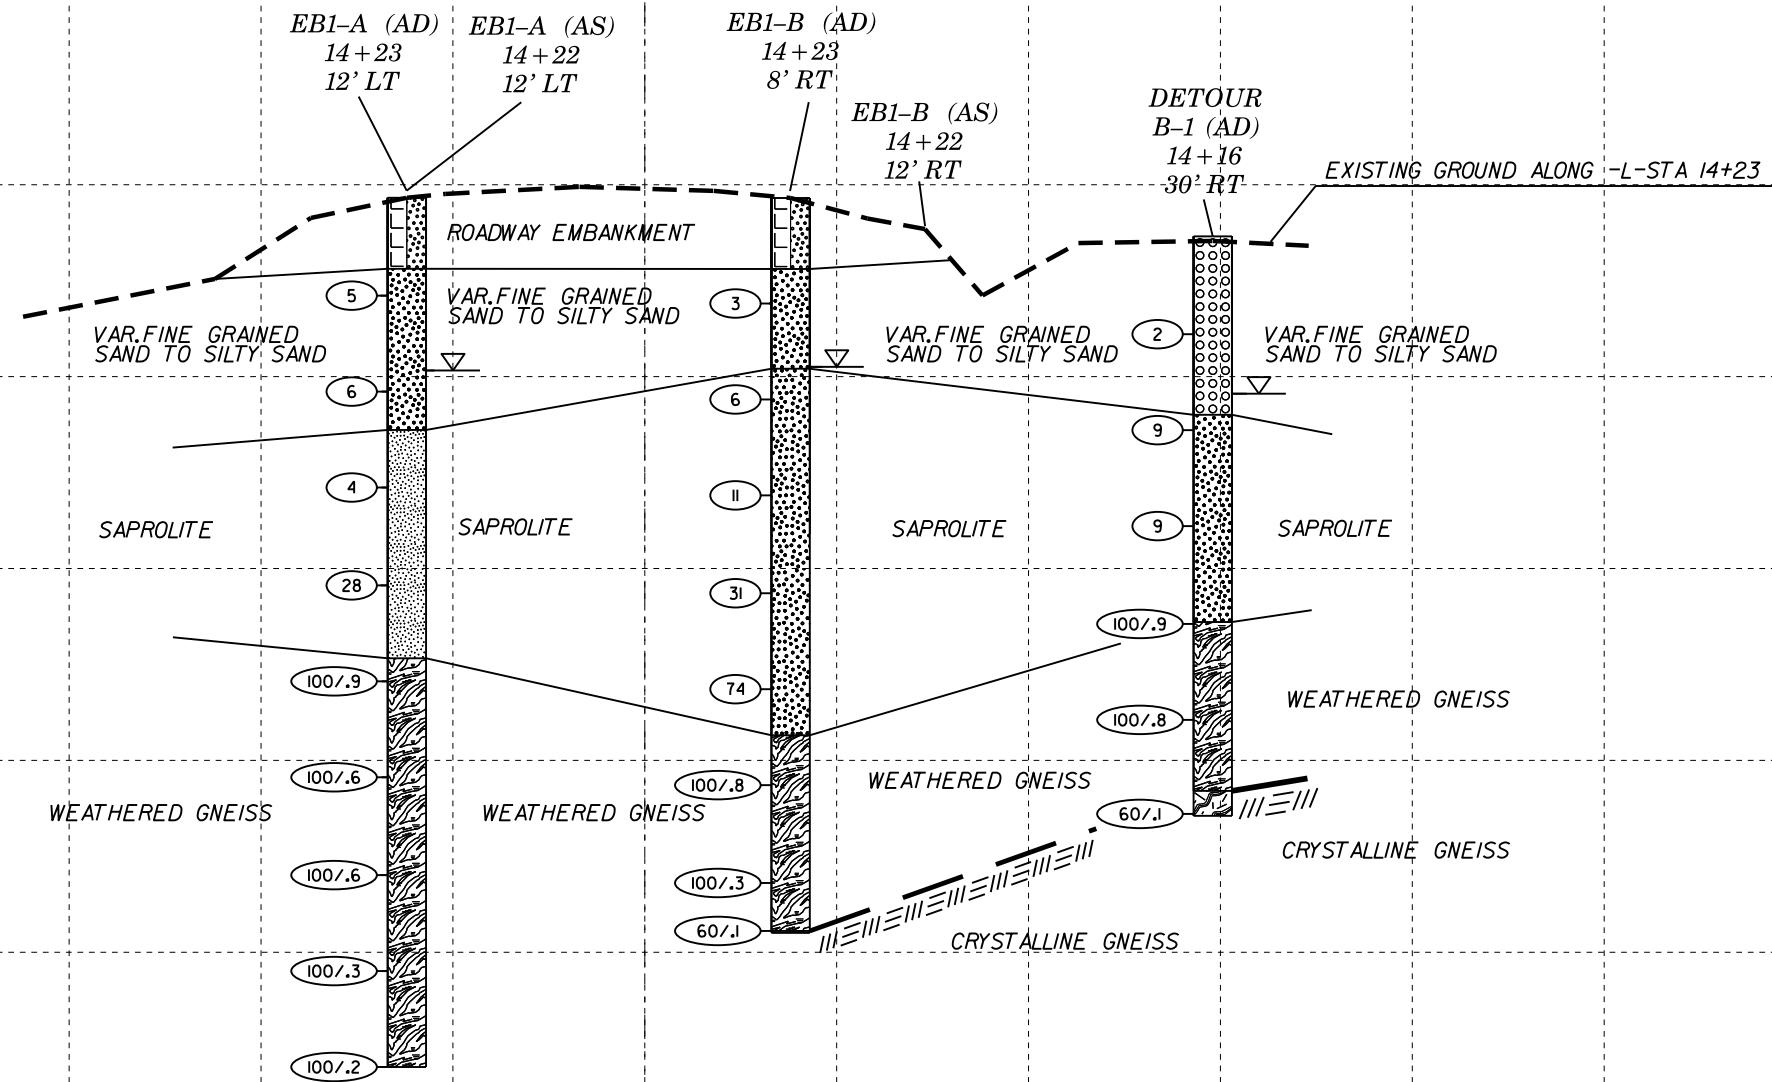

C/L

EB1-A (AD)
14+23
12' LT

EB1-A (AS)
14+22
12' LT

EB1-B (AD)
14+23
8' RT

EB1-B (AS)
14+22
12' RT

DETOUR
B-1 (AD)
14+16
30' RT

EXISTING GROUND ALONG -L- STA 14+23

ROADWAY EMBANKMENT

VAR. FINE GRAINED SAND TO SILTY SAND

VAR. FINE GRAINED SAND TO SILTY SAND

VAR. FINE GRAINED SAND TO SILTY SAND

VAR. FINE GRAINED SAND TO SILTY SAND

SAPROLITE

SAPROLITE

SAPROLITE

SAPROLITE

WEATHERED GNEISS

WEATHERED GNEISS

WEATHERED GNEISS

WEATHERED GNEISS

CRYSTALLINE GNEISS

CRYSTALLINE GNEISS




VE = 1H = 1V

-L- SKEW = 90 DEG.

2150
2140
2130
2120
2110
2100
2090
2080
2070
2060

2140
2130
2120
2110
2100
2090
2080
2070
2060

-60 -50 -40 -30 -20 -10 C/L 10 20 30 40 50 60 70

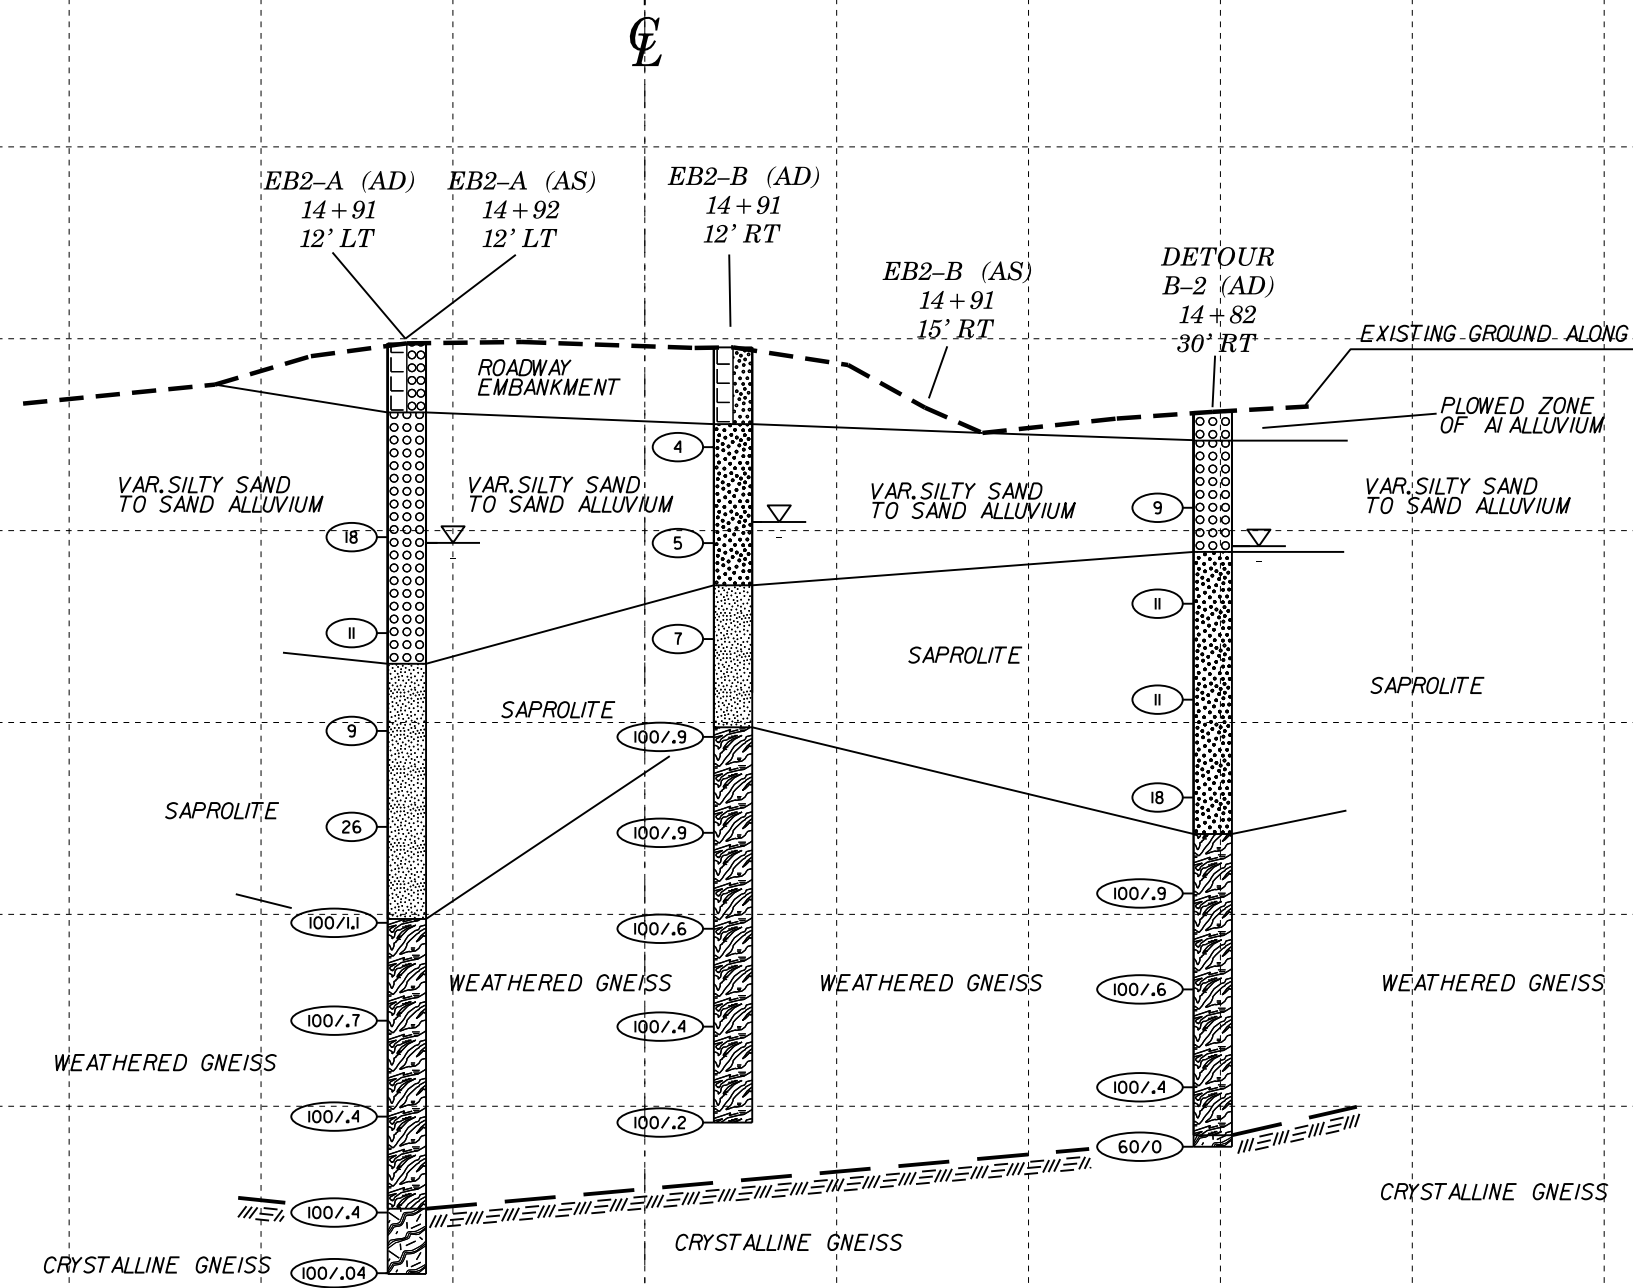

EB2-A (AD)
14+91
12' LT

EB2-A (AS)
14+92
12' LT

EB2-B (AD)
14+91
12' RT

EB2-B (AS)
14+91
15' RT

DETOUR
B-2 (AD)
14+82
30' RT

ROADWAY
EMBANKMENT

EXISTING GROUND ALONG -L- STA. 14+91

PLOWED ZONE
OF ALLUVIUM

VAR. SILTY SAND
TO SAND ALLUVIUM

VAR. SILTY SAND
TO SAND ALLUVIUM

VAR. SILTY SAND
TO SAND ALLUVIUM

VAR. SILTY SAND
TO SAND ALLUVIUM

SAPROLITE

SAPROLITE

SAPROLITE

SAPROLITE

WEATHERED GNEISS

WEATHERED GNEISS

WEATHERED GNEISS

WEATHERED GNEISS

CRYSTALLINE GNEISS

CRYSTALLINE GNEISS

CRYSTALLINE GNEISS

18

11

9

26

100/.1

100/.7

100/.4

100/.4

100/.4

100/.4

100/.4

100/.4

100/.04

4

5

7

100/.9

100/.9

100/.9

100/.6

100/.6

100/.4

100/.4

100/.2

9

11

11

11

18

100/.9

100/.9

100/.6

100/.6

100/.4

100/.4

60/0

WBS 46118.1.1		TIP B5403		COUNTY TRANSYLVANIA		GEOLOGIST Elliott, D. C.									
SITE DESCRIPTION N/A							GROUND WTR (ft)								
BORING NO. EB1-A		STATION 14+27		OFFSET 14 ft LT		ALIGNMENT L									
COLLAR ELEV. 2,109.3 ft		TOTAL DEPTH 46.3 ft		NORTHING 919,987		EASTING 559,970									
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014							DRILL METHOD NW Casing w/ Advancer								
DRILLER N/A							HAMMER TYPE Automatic								
START DATE 10/06/14		COMP. DATE 10/06/14		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2110														2,109.3	0.0
2105	2,104.2	5.1	1	3	2									2,105.6	3.7
2100	2,099.2	10.1	2	2	4									2,097.2	12.1
2095	2,094.2	15.1	2	2	2									2,093.8	15.5
2090	2,089.2	20.1	9	12	16									2,088.8	20.5
2085	2,084.2	25.1	100/9											2,083.8	25.5
2080	2,079.2	30.1	100/6											2,078.8	30.5
2075	2,074.2	35.1	100/6											2,073.8	35.5
2070	2,069.2	40.1	100/3											2,071.1	38.2
2065	2,064.2	45.1	100/2											2,064.0	45.3
Boring Terminated at Elevation 2,063.0 ft IN WR															

WBS 46118.1.1		TIP B5403		COUNTY TRANSYLVANIA		GEOLOGIST Elliott, D. C.									
SITE DESCRIPTION N/A							GROUND WTR (ft)								
BORING NO. EB1-B		STATION 14+27		OFFSET 7 ft RT		ALIGNMENT L									
COLLAR ELEV. 2,109.3 ft		TOTAL DEPTH 38.3 ft		NORTHING 920,007		EASTING 559,968									
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014							DRILL METHOD NW Casing w/ Advancer								
DRILLER N/A							HAMMER TYPE Automatic								
START DATE 10/07/14		COMP. DATE 10/07/14		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2110														2,109.3	0.0
2105	2,103.8	5.5	1	2	1									2,105.6	3.7
2100	2,098.8	10.5	2	3	3									2,100.4	8.9
2095	2,093.8	15.5	3	7	4									2,093.8	15.5
2090	2,088.8	20.5	11	13	18									2,088.8	20.5
2085	2,083.8	25.5	28	31	43									2,081.3	28.0
2080	2,078.8	30.5	100/8											2,078.8	30.5
2075	2,073.8	35.5	100/3											2,073.8	35.5
2070	2,071.1	38.2	60/1											2,071.1	38.2
														2,071.0	38.3
Boring Terminated at Elevation 2,071.0 ft IN CR															

NCDOT BORE DOUBLE B5403_GEO_BRDG.GPJ NC_DOT.GDT 12/29/14



NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 46118.1.1	TIP B5403	COUNTY TRANSYLVANIA	GEOLOGIST Elliott, D. C.	
SITE DESCRIPTION N/A				GROUND WTR (ft)
BORING NO. B1-D	STATION 14+64	OFFSET CL	ALIGNMENT L DET	0 HR. N/A
COLLAR ELEV. 2,107.3 ft	TOTAL DEPTH 30.2 ft	NORTHING 920,028	EASTING 559,960	24 HR. 8.2
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014		DRILL METHOD N/A	HAMMER TYPE Automatic	
DRILLER N/A	START DATE 10/02/14	COMP. DATE 10/02/14	SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													GROUND SURFACE	0.0
2105													ALLUVIAL Brown / lt brown slightly micaceous silty fine to coarse sand with some wood debris	
2100	2,102.2	5.1	1	1	1									
2095	2,097.2	10.1	2	4	5								SAPROLITE Off white / lt tan / trace of orange slightly micaceous silty, fine sand	9.3
2090	2,092.2	15.1	3	4	5									
2085	2,087.2	20.1	100/9										WEATHERED ROCK Off white / lt tan / trace of orange slightly micaceous weathered rock	20.1
2080	2,082.2	25.1	100/8											
	2,077.2	30.1	60/1										CRYSTALLINE ROCK Crystalline rock Boring Terminated at Elevation 2,077.1 ft IN CR	30.2

WBS 46118.1.1	TIP B5403	COUNTY TRANSYLVANIA	GEOLOGIST Elliott, D. C.	
SITE DESCRIPTION N/A				GROUND WTR (ft)
BORING NO. B2-D	STATION 15+38	OFFSET CL	ALIGNMENT L DET	0 HR. N/A
COLLAR ELEV. 2,106.0 ft	TOTAL DEPTH 38.3 ft	NORTHING 920,034	EASTING 560,025	24 HR. 7.0
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014		DRILL METHOD NW Casing w/ Advancer	HAMMER TYPE Automatic	
DRILLER N/A	START DATE 10/03/14	COMP. DATE 10/03/14	SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													GROUND SURFACE	0.0
2105													ALLUVIAL Plowed zone of A1 alluvium	1.5
2100	2,101.0	5.0	3	7	2								ALLUVIAL Brown to lt brown / tan slightly micaceous silty fine to coarse sand with some sub-rounded gravels and a few cobble frags	7.3
2095	2,096.0	10.0	3	5	6								SAPROLITE Off white / lt tan / trace orange slightly micaceous silty fine sand	
2090	2,091.0	15.0	5	4	7									
2085	2,086.0	20.0	8	9	9								WEATHERED ROCK Off white / tan / trace orange slightly micaceous weathered rock	22.0
2080	2,081.0	25.0	100/9											
2075	2,076.0	30.0	100/6											
2070	2,071.0	35.0	100/4											
	2,067.7	38.3	60/0										CRYSTALLINE ROCK Crystalline rock Boring Terminated at Elevation 2,067.7 ft IN CR	38.3

NCDOT BORE DOUBLE B5403_GEO_BRDG.GPJ NC_DOT.GDT 12/29/14

WBS 46118.1.1	TIP B5403	COUNTY TRANSYLVANIA	GEOLOGIST Elliott, D. C.
SITE DESCRIPTION N/A			GROUND WTR (ft)
BORING NO. EB2-A	STATION 14+92	OFFSET 14 ft LT	ALIGNMENT L
COLLAR ELEV. 2,109.8 ft	TOTAL DEPTH 48.5 ft	NORTHING 919,992	EASTING 560,038
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014			DRILL METHOD NW Casing w/ Advancer
DRILLER N/A			HAMMER TYPE Automatic
START DATE 10/08/14	COMP. DATE 10/08/14	SURFACE WATER DEPTH N/A	

WBS 46118.1.1	TIP B5403	COUNTY TRANSYLVANIA	GEOLOGIST Elliott, D. C.
SITE DESCRIPTION N/A			GROUND WTR (ft)
BORING NO. EB2-B	STATION 14+92	OFFSET 4 ft RT	ALIGNMENT L
COLLAR ELEV. 2,109.6 ft	TOTAL DEPTH 40.4 ft	NORTHING 920,009	EASTING 560,036
DRILL RIG/HAMMER EFF./DATE AFO0134 CME-45C 88% 05/14/2014			DRILL METHOD NW Casing w/ Advancer
DRILLER N/A			HAMMER TYPE Automatic
START DATE 10/06/14	COMP. DATE 10/06/14	SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													2,109.8 GROUND SURFACE	0.0
													ROADWAY EMBANKMENT Soft, silty sand embankment	
2105													2,106.2 ALLUVIAL Gray / black silty sand with gravels	3.6
2100	2,099.7	10.1	4	12	6									
2095	2,094.7	15.1	16	8	3									
2090	2,089.7	20.1	0	4	5								2,093.1 SAPROLITE Very soft tan and white slightly micaceous fine sandy silt	16.7
2085	2,084.7	25.1	12	12	14									
2080	2,079.7	30.1	30	48	227.1								2,079.8 WEATHERED ROCK Lt. gray / tan / slightly micaceous silty sand with small rock frags	30.0
2075	2,074.7	35.1	60	40/2										
2070	2,069.7	40.1	100/4											
2065	2,064.7	45.1	100/4										2,064.7 CRYSTALLINE ROCK	45.1
	2,061.3	48.5	100/04										2,061.3 Boring Terminated at Elevation 2,061.2 ft IN CR	48.5

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2110													2,109.6 GROUND SURFACE	0.0
													ROADWAY EMBANKMENT	
2105	2,104.4	5.2	1	2	2								2,105.6 ALLUVIAL Lt gray / brown slightly micaceous silty sand with gravels at 7.9	4.0
2100	2,099.4	10.2	1	3	2									
2095	2,094.4	15.2	2	4	3								2,097.2 SAPROLITE Gray / lt gray / white slightly micaceous fine sandy silt	12.4
2090	2,089.4	20.2	100/9											
2085	2,084.4	25.2	100/9										2,089.8 WEATHERED ROCK Lt gray / off white / orange slightly micaceous seamy weathered rock	19.8
2080	2,079.4	30.2	100/6											
2075	2,074.4	35.2	100/4											
2070	2,069.4	40.2	100/2											
													Boring Terminated at Elevation 2,069.2 ft IN WR	40.4

NCDOT BORE DOUBLE B5403_GEO_BRDG.GPJ NC_DOT.GDT 12/29/14