



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	I-5736 & I-5767	6	
F.A. PROJ. NO. I-5736 NHPP-0074(174), I-5767 NHPP-0074(177)			


### INCIDENTAL MILLING DETAIL 1

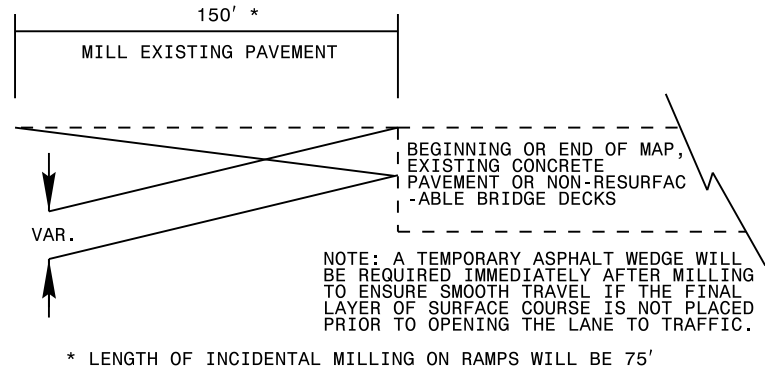

### INCIDENTAL MILLING DETAIL 2

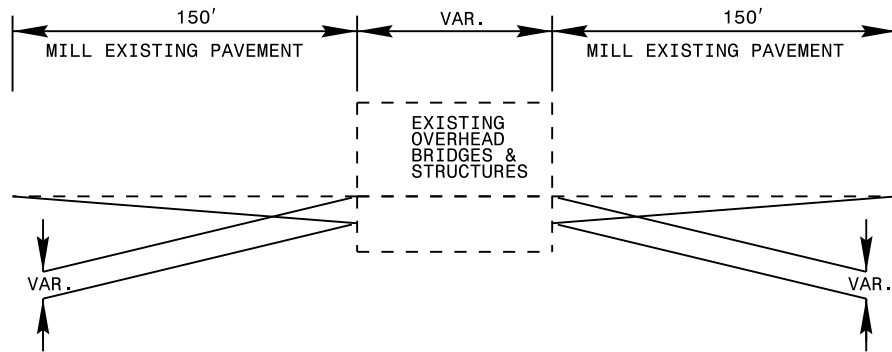

### PATCHING EXISTING PAVEMENT DETAIL 1

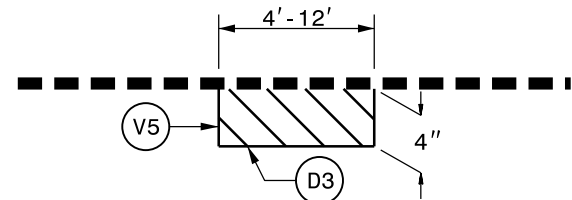

MILL EXISTING ASPHALT PAVEMENT 4" IN DEPTH AND FILL WITH INTERMEDIATE COURSE, TYPE I19.0D AT LOCATIONS AS DIRECTED BY THE ENGINEER.

### PAVEMENT SCHEDULE

C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	
C2	PROP. APPROX. ¾" OPEN-GRADED ASPHALT FRICTION COURSE, TYPE FC-2 MODIFIED, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YD.	
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	
D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	
D3	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVG RATE OF 456 LBS. PER SQ. YD. IN ONE LIFT	
F	AST MAT COAT, #67 STONE	
N	NON-WOVEN GEOTEXTILE PAVEMENT INTERLAYER	
R	EXISTING CONCRETE STRUCTURE	
T	INCIDENTAL STONE BASE IN LOW SHOULDER AREAS, AS DIRECTED BY THE ENGINEER.	
U	EXISTING PAVEMENT.	
V1	2½" MILLING	V2 RUMBLE STRIPS Std. 665.01
V3	0 - 1½" MILLING	V4 1½" MILLING
V5	4" MILLING	V6 3" MILLING