


NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 11

PROJECT REFERENCE NO. U-2707	SHEET NO. EC-II/CONST.II
RW SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	

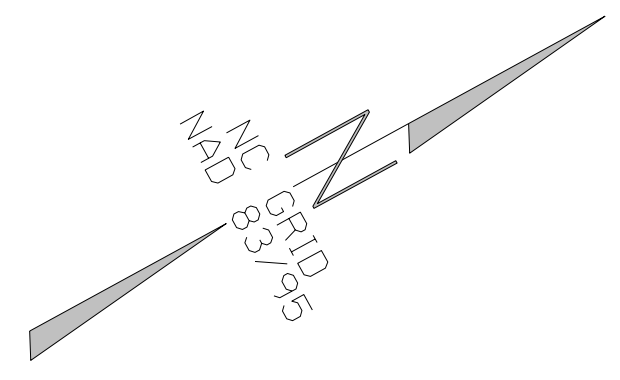


26


110 x 35 x 3
2 inch Skimmer
with 1.625 inch
Orifice Diameter
15 ft. weir
ID 1101

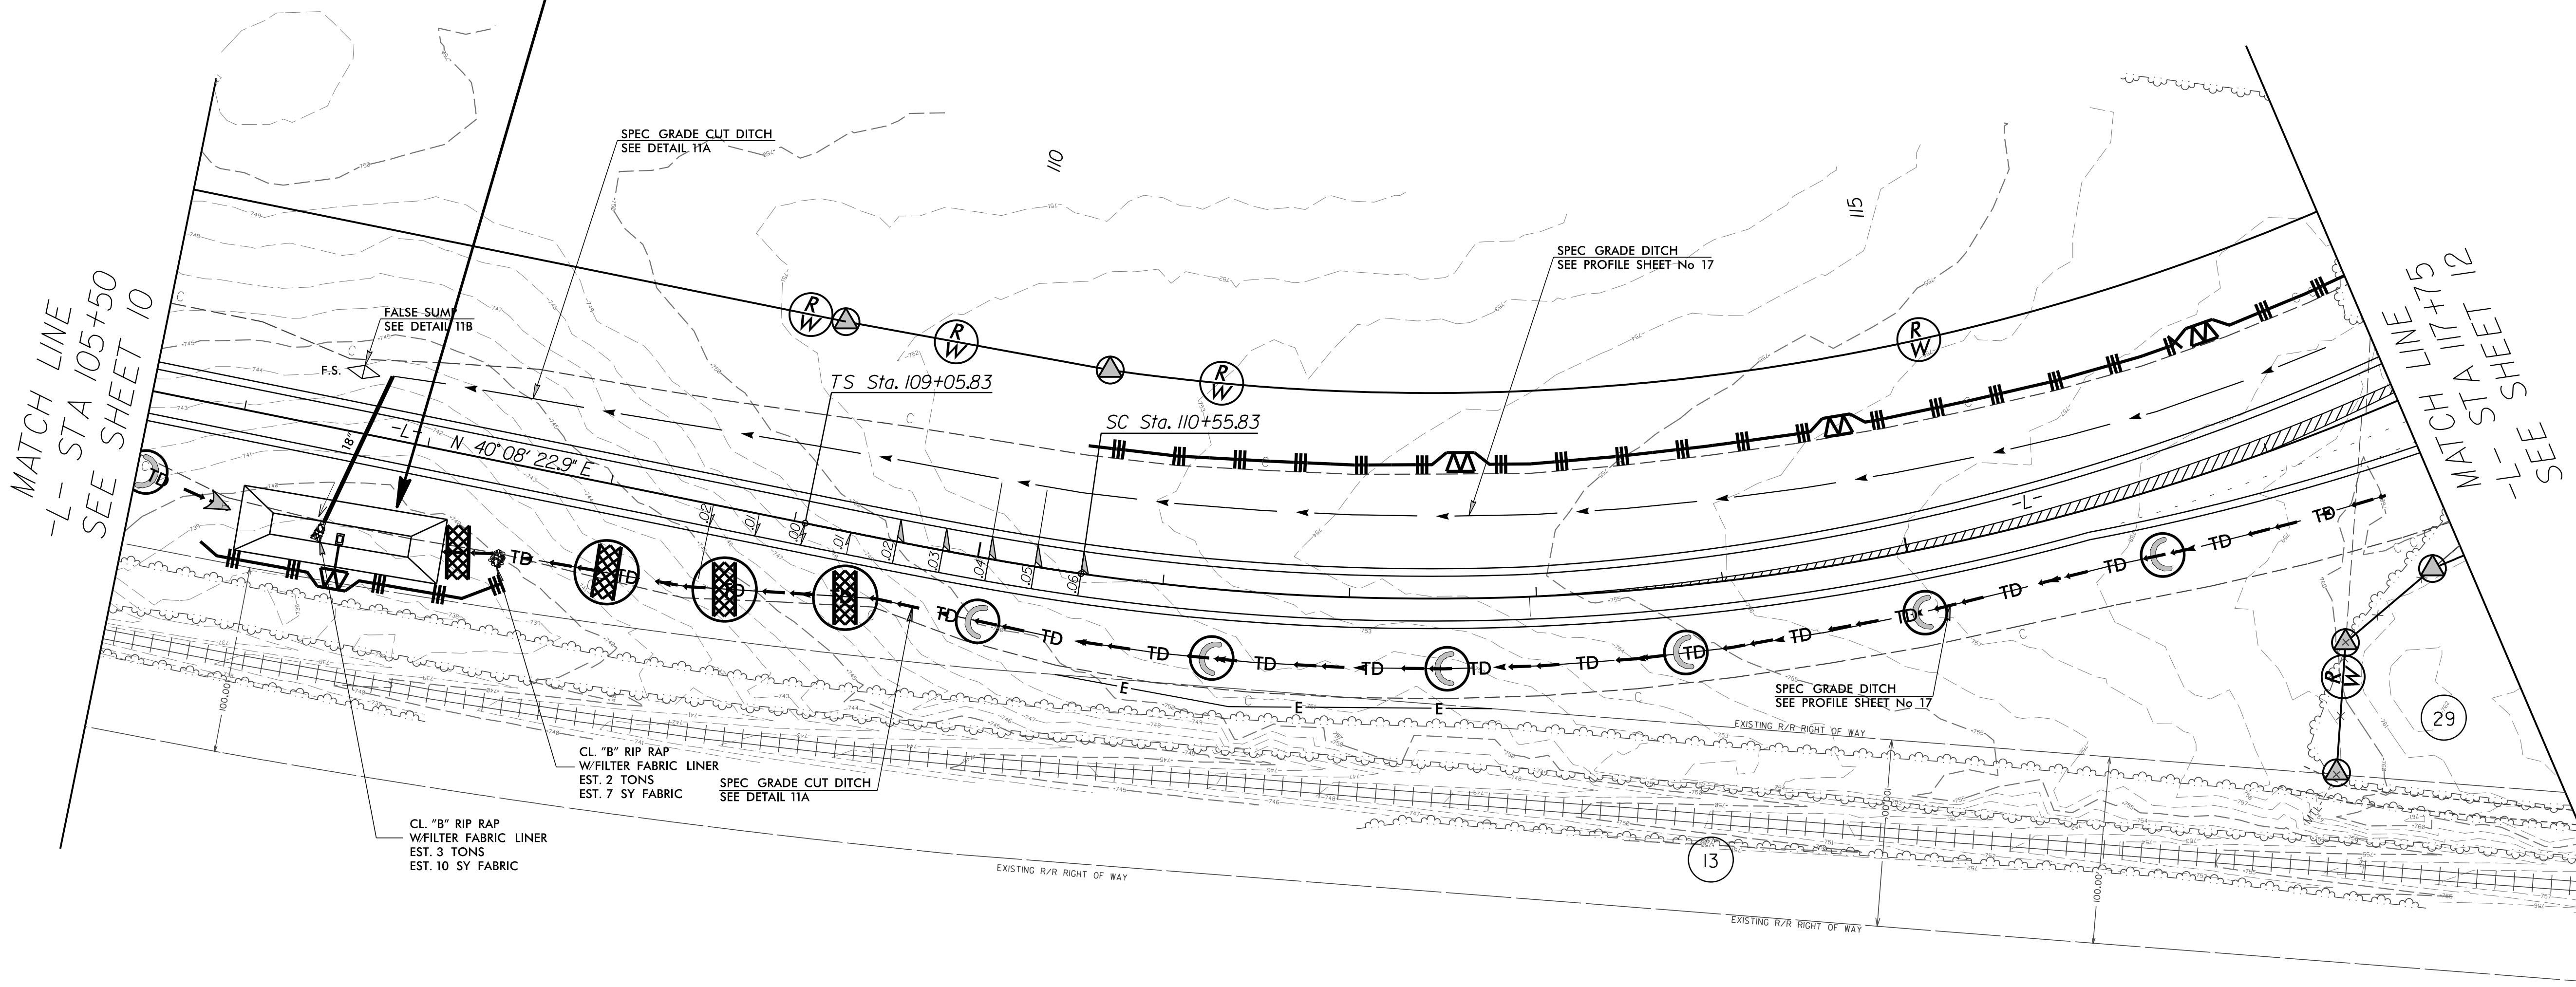

REVISIONS

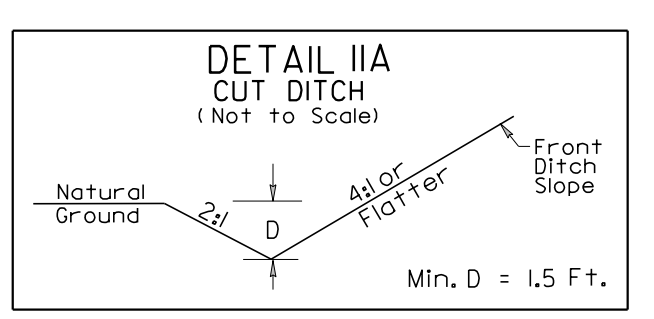

-L- STA. 106+75 TO -L- STA. 108+00 LT
-L- STA. 107+50 TO -L- STA. 110+00 RT

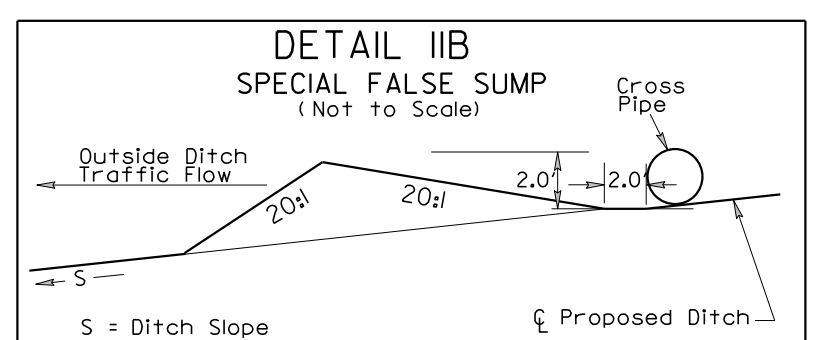

-L- STA. 106+60 LT

-L-

PIs Sta 110+05.85	PI Sta 115+08.96
$\theta_s = 3^\circ 16' 04.1''$	$\Delta = 38^\circ 01' 36.1''$ (LT)
$L_s = 150.00'$	$D = 4' 21' 25.5''$
$LT = 100.02'$	$L = 872.75'$
$ST = 50.01'$	$T = 453.13'$
	$R = 1,315.00'$
	$SE = 0.06$