

TYPICAL SECTION NO.4

NC 205 (MAP 3)


SR 1367 UNIONVILLE-INDIAN TRAIL ROAD

(MAP 4), (MAP 5) & (MAP 6)

*SEE NOTE 7 FOR MAP 4

SR 1627 NEW SALEM ROAD (MAP 12)

*SEE NOTE 6

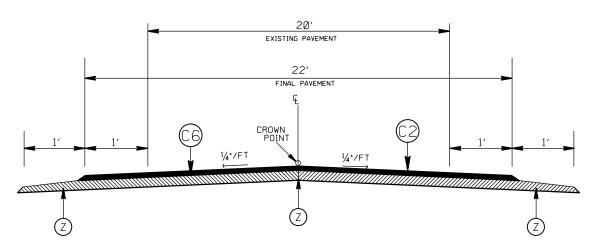

TYPICAL SECTION NO.5

SR 1504 RIDGE ROAD (MAP 7)

*SEE NOTE 5

STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2016CPT.10.64.10901.2-ETC. 2016CPT.10.64.20901.5-ETC. 2016CPT.10.58.20902.1-ETC.	16	

F.A. PROJECT NO.

PAVEMENT SCHEDULE

(C1)	PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
(C2)	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(C3)	PROP. APPROX. 1.0" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
(C4)	PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
(C5)	PROP. APPROX. 1.5" SF9.5A ASPHALT CON. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
(C6)	PROP.ASPHALT SURFACE TREATMENT, DOUBLE SEAL #78M, TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION.
(D1)	PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
(D2)	AST MAT COAT # 6M
U	EXISTING PAVEMENT
(T1)	SHOULDER RECONSTRUCTION
(V1)	MILLING OF EXISTING PAVEMENT, 1.5" DEPTH.
(V2)	PROFILE MILLING OF EXISTING PAVEMENT, 0 - 2.0" DEPTH.
Z	FULL DEPTH RECLAMATION

2016-2017 UNION COUNTY RESURFACING

SCALE	-NA-	
DATE	01/16	
DWG. BY	AMO	
DESIGN BY	AMO	
APPROVED	CLA	



REVISIONS