

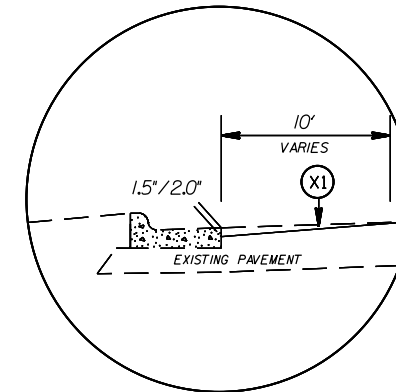
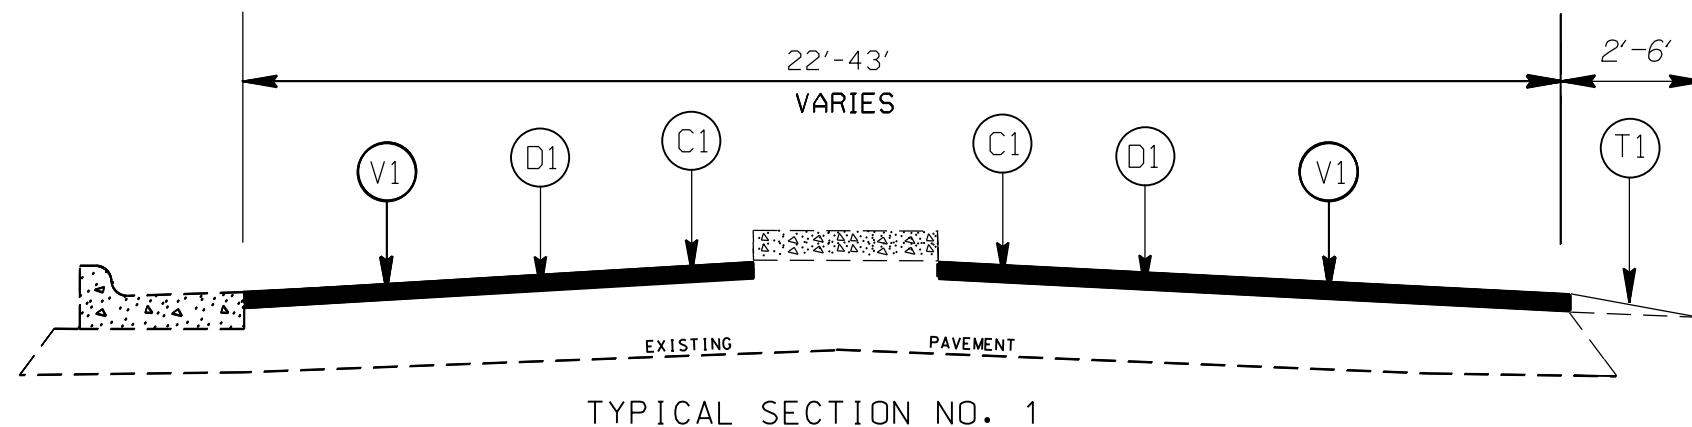
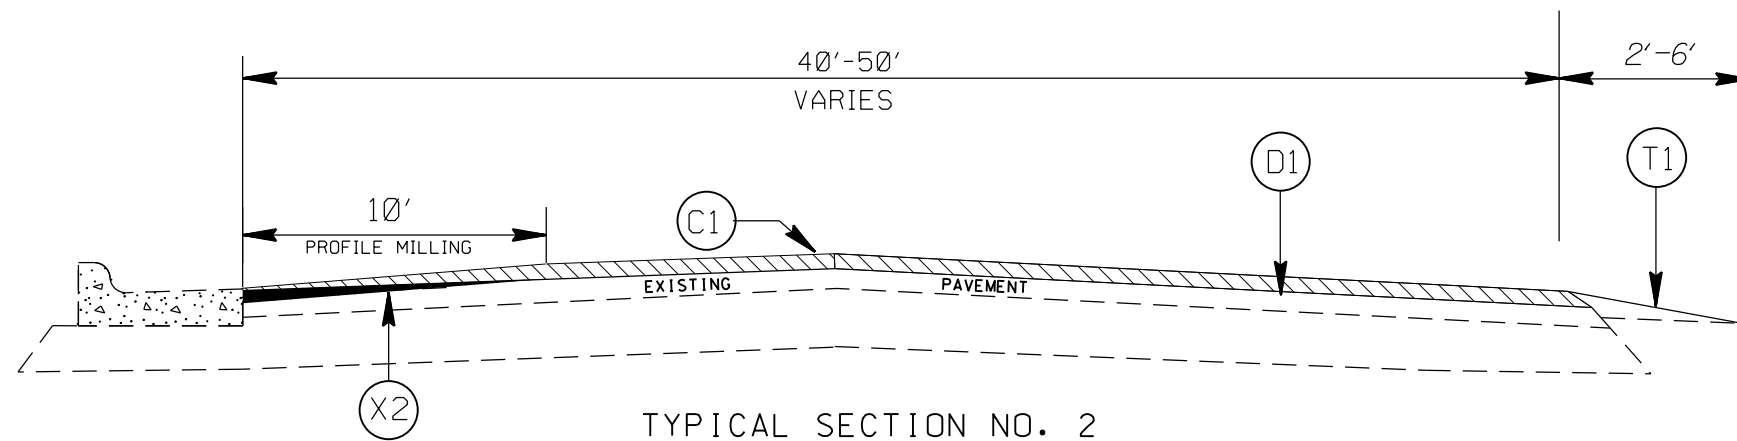


STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2016CPT.10.57.10131.I, ETC.	5	
F.A. PROJECT NO.			

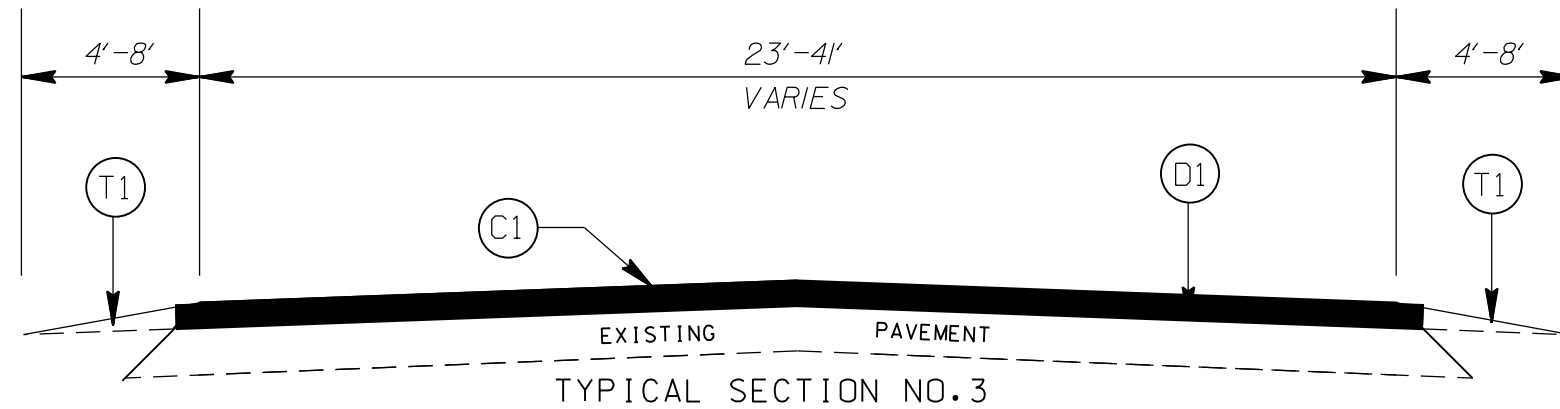

DETAIL FOR PROFILE MILLING (0" TO 1.5")
 DETAIL FOR PROFILE MILLING (0" TO 2.0")

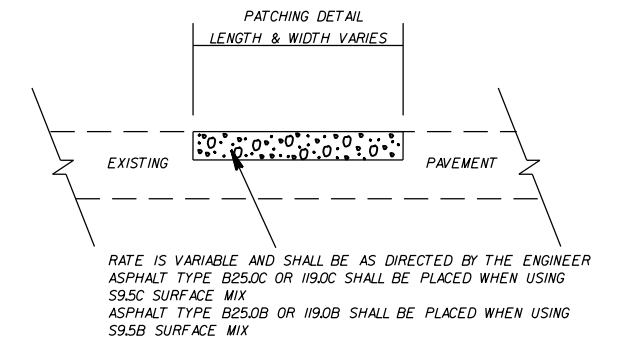

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C5	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C6	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C7	PROP. ASPHALT SURFACE TREATMENT, TYPE AST DOUBLE SEAL (#14/78M), TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION
D1	AST MAT COAT # 67
D2	MAT COAT # 78M
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 2.0" DEPTH. AS DIRECTED BY THE ENGINEER
V2	MILLING BITUMINOUS PAVEMENT 1.5" DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5"
X2	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 2.0"
Z	FULL DEPTH RECLAMATION

NOTE: 2.0" MILLING FROM THE INTERSECTION OF CABARRUS AVE. TO APPROX. 500' SOUTH OF INTERSECTION OR AS DIRECTED BY THE ENGINEER

CABARRUS COUNTY
RESURFACING 2016-2017

SCALE	-NA-		REVISIONS
DATE	3/16		
DWG. BY	JDA		
DESIGN BY	JDA		
APPROVED	MPM		