
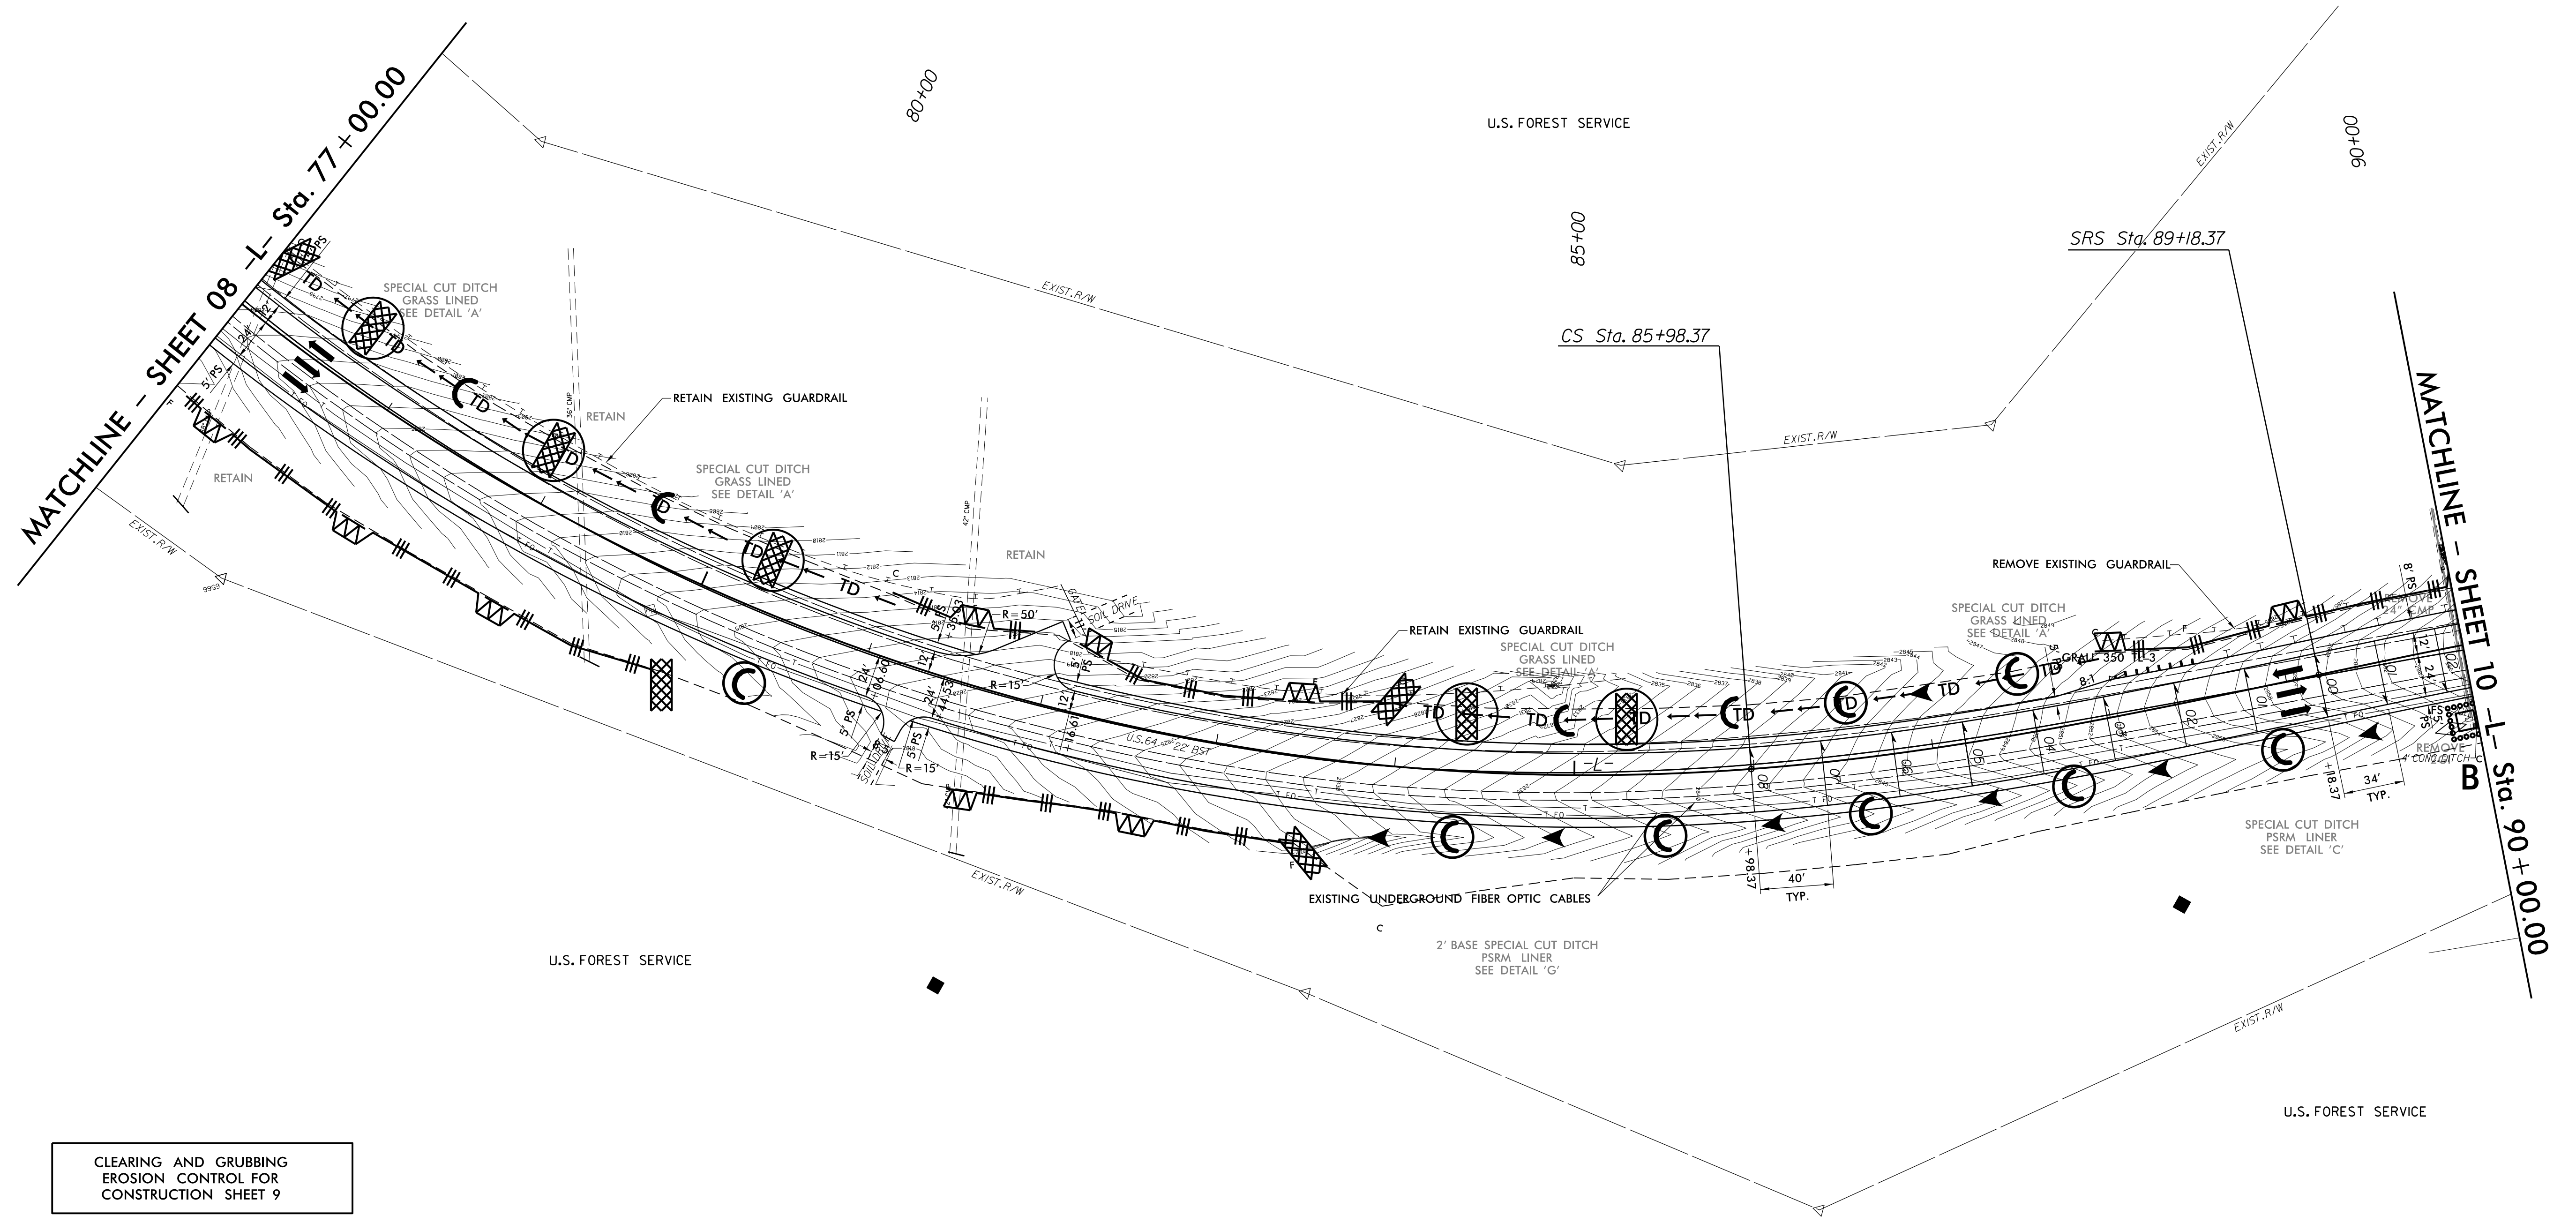
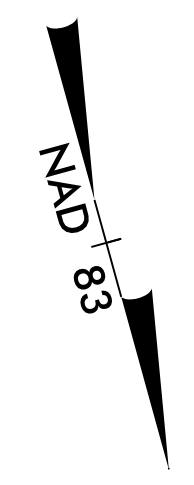
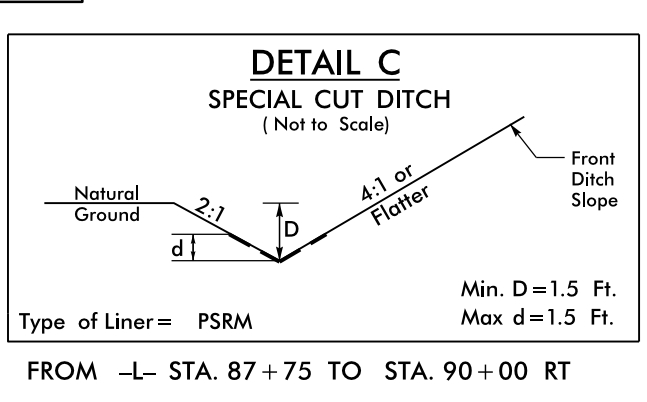
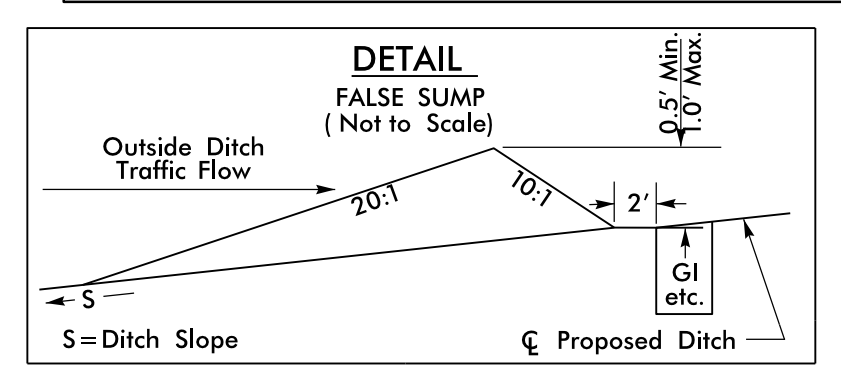
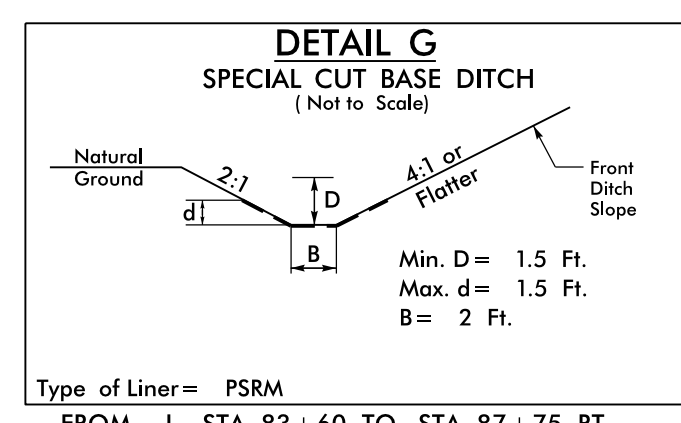


PROJECT REFERENCE NO.	SHEET NO.
R-4416	EC-9/CONST.9
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

-L- LINE	
PI Sta 81+32.59	PIs Sta 87+05.22
$\Delta = 47^{\circ} 22' 36.4" (LT)$	$\theta_s = 7^{\circ} 38' 22.0"$
$D = 4' 46" 28.7"$	$L_s = 320.00'$
$L = 992.26'$	$LT = 213.53'$
$T = 526.47'$	$ST = 106.85'$
$R = 1,200.00'$	
$D_s = 60\text{mph}$	
$SE = .08$	

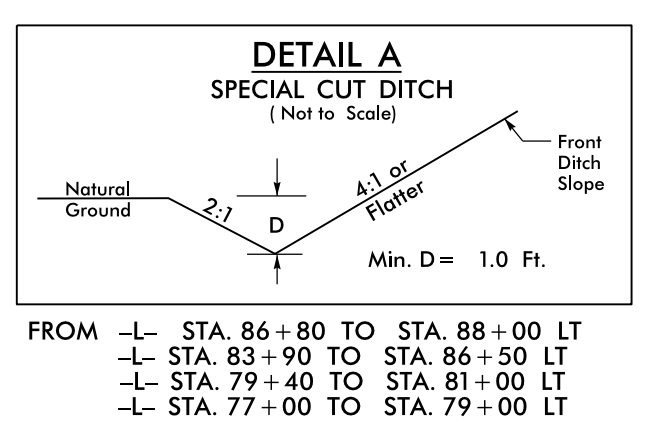

CLEARING AND GRUBBING
 EROSION CONTROL FOR
 CONSTRUCTION SHEET 9

NOTE:
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
 AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
 DRAINAGE OUTLETS.

FOR -L- PROFILE SEE SHEET 22

8/17/99
 C:\FEB-2006\JHO\TS\Projects\N-4416 (Clay Co. DDRL)\Revisions 2-11-2006\R-4416-EC.pst\09.dgn
 C:\FEB-2006\JHO\TS\Projects\N-4416 (Clay Co. DDRL)\Revisions 2-11-2006\R-4416-EC.pst\09.dgn