
PAVEMENT SCHEDULE						
Y	SHOULDER RECONSTRUCTION					
C1	PROP. APPROX. $11\!\!\!/_2$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.					
C2	PROP. APPROX. $11\!\!\!/_2$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.					
E1	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.					
V1	MILL ASPHALT PAVEMENT APPROX. $1lash2^{\prime\prime}$ AS DIRECTED BY THE ENGINEER.					


NOTE: MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.

MILL INTO GUTTER LINE WHERE SHOWN AND AS DIRECTED.

MAINTAIN PROPER CROWN FOR DRAINAGE OF THE ROAD SURFACE.

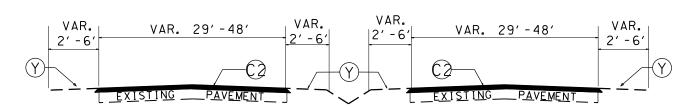


TYPICAL SECTION NO. 1

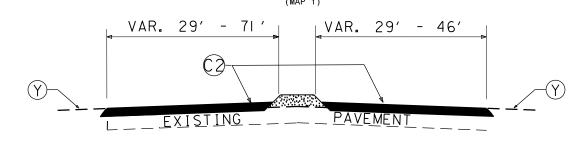


TYPICAL SECTION NO. 2

(MAP 1)

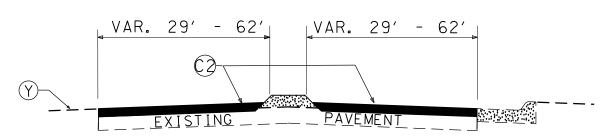


TYPICAL SECTION NO. 3

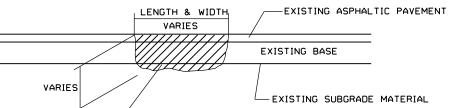

MILL EXISTING ASPHALT PAVEMENT AND REMOVE
EXISTING LOOSE BASE AND/OR SUBGRADE MATERIAL AND REPLACE WITH ACBC
OR ACSC AS DIRECTED BY THE ENGINEER

## PATCHING EXISTING PAVEMENT

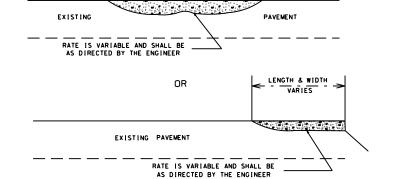


LENGTH & WIDTH

VARIES

ASPHALT CONCRETE SURFACE COURSE

TYPE S9.5B. (LEVELING COURSE)

PROJ. REFERENCE NO	SHEET NO.			TOTAL SHEE	TS	
CLEVELAND CO. 2016-2	4					
STATE PROJ. NO.	F. A	PROJ.	NO.		DESCRIPTION	1
201 6CPT. 1 2. 06. 1 0231						
201 6CPT. 1 2. 06. 20231						

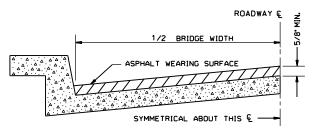

## BRIDGE HALF TYPICAL SECTION

FOR BRIDGES WITH FLOOR DRAINS, CARE SHALL BE EXERCISED IN PLACING THE WEARING SURFACE AROUND FLOOR DRAINS SO AS NOT TO HINDER EFFECTIVE DRAINAGE. ALL DRAINS SHALL BE LEFT OPEN.

THE PROPOSED WEARING SURFACE SHALL VARY IN THICKNESS AS NECESSARY TO PROVIDE A SMOOTH RIDING SURFACE. A THICKNESS OF NOT LESS THAN 5/8° SHALL BE PROVIDED. THE MAXIMUM THICKNESS SHALL PREFERABLY BE 1-1/2° UNLESS IT IS IMPRACTICAL TO PROVIDE A SMOOTH RIDING SURFACE OTHERWISE.

## NOTES

ALL UNPAYED S.R. ROADS TO BE SURFACED 50' FROM EDGE OF PAYEMENT OF MAIN PROJECT.
ALL PAYED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER.
EDGES, PAYEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE TABLE OF QUANTITIES.
SHOULDERS AND DITCHES ARE TO BE CONSTRUCTED BY OTHERS UNLESS OTHERWISE NOTED.

BRIDGES TO BE RESURFACED AT LOCATIONS AND TO DEPTH AS DIRECTED BY THE ENGINEER.

## INCIDENTAL MILLING DETAILS

