



| STATE | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
|------------------|--|-----------|--------------|
| N.C. | 2016CPT.10.58.20902.8, 2016CPT.10.64.10901.18, ETC. | 15 | |
| F.A. PROJECT NO. | | | |

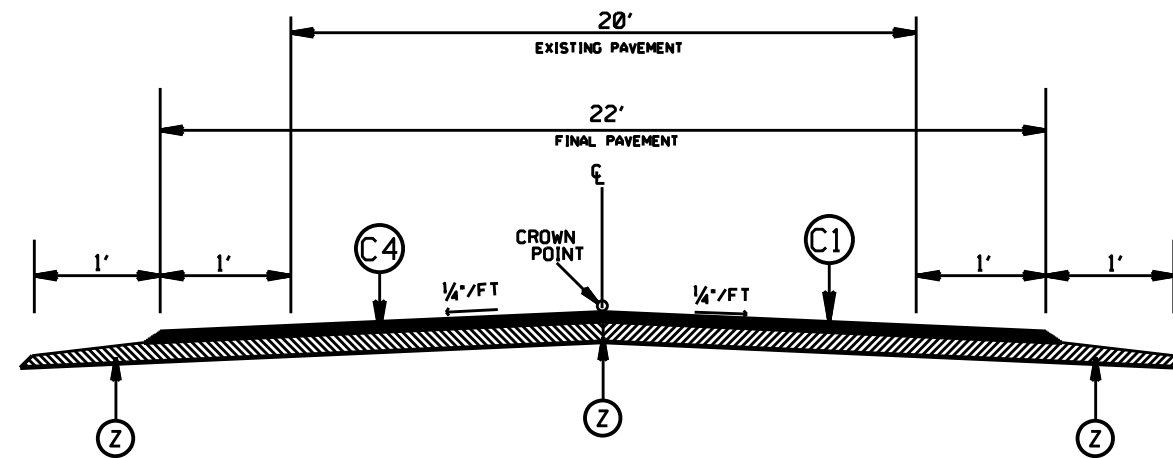

TYPICAL SECTION NO. 5

SR 1341 TWELVE MILE CREEK (MAP 21)
*SEE NOTE 3 & 5

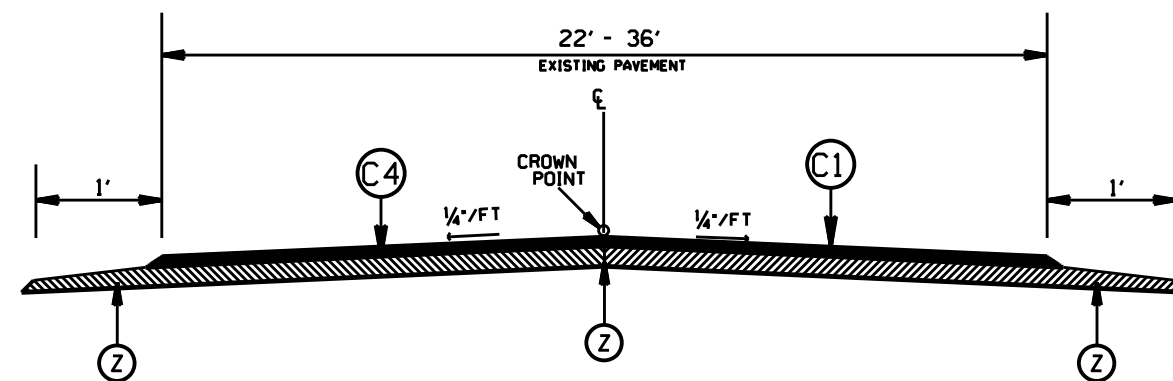

TYPICAL SECTION NO. 6

SR 1341 TWELVE MILE CREEK (MAP 21)
FROM STA: 34+67 TO STA: 146+54
*SEE NOTE 3 & 5

PAVEMENT SCHEDULE

| | |
|------|---|
| (C1) | PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| (C2) | PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. |
| (C3) | PROP. APPROX. 1.5" SF9.5A ASPHALT CON. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| (C4) | PROP. ASPHALT SURFACE TREATMENT, DOUBLE SEAL #78M, TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION. |
| (D1) | PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE CORSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| (E1) | PROPOSED 6" OF ASPHALT CONC. BASE COURSE, B25.0B, AT AN AVERAGE RATE 342 LBS. PER SQ. YD., IN EACH OF TWO LAYERS. |
| (U) | EXISTING PAVEMENT |
| (T1) | SHOULDER RECONSTRUCTION |
| (T2) | SHOULDER CONSTRUCTION |
| (V1) | MILLING OF EXISTING PAVEMENT, 1.5" DEPTH. |
| (V2) | PROFILE MILLING EXISTING ASPHALT, 0 - 2" |
| (V3) | MILLING OF EXISTING PAVEMENT, 2.0" DEPTH |
| (Z) | FULL DEPTH RECLAMATION |

2016-2017
UNION COUNTY RESURFACING

| SCALE | -NA- | REVISIONS |
|-----------|-------|-----------|
| DATE | 01/16 | |
| DWG. BY | AMD | |
| DESIGN BY | AMD | |
| APPROVED | CLA | |

