

REFERENCE: B-5410

PROJECT: 46125

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY JACKSON
PROJECT DESCRIPTION REPLACE BRIDGE NO. 221 ON
SR 1367 OVER LITTLE SAVANNAH CREEK

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4-5	CROSS SECTIONS
6-7	BORE LOGS
8	SOIL TEST RESULTS
9	SITE PHOTOGRAPHS

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-5410	1	9

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
1. THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 2. BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

W. S. HUNSBERGER

SOIL DRILLING SERVICES

INVESTIGATED BY WSH

DRAWN BY WSH

CHECKED BY J. R. HAMM

SUBMITTED BY FALCON

DATE JUNE 2015



Designed by W. Scott Hunsberger

EA39AB9EDF5845A...

7/28/2015

SIGNATURE

DATE


NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS

GEOTECHNICAL ENGINEERING UNIT


SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS


SOIL DESCRIPTION				GRADATION				ROCK DESCRIPTION				TERMS AND DEFINITIONS																																																															
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 208, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>				WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.				HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL, SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:				ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS, MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (ROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (IN OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.																																																															
SOIL LEGEND AND AASHTO CLASSIFICATION												WEATHERING																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>GENERAL CLASS.</th> <th>GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th>SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th>ORGANIC MATERIALS</th> </tr> <tr> <td>GROUP CLASS.</td> <td>A-1, A-3, A-2-4, A-2-5, A-2-6, A-2-7</td> <td>A-4, A-5, A-6, A-7</td> <td>A-1, A-2, A-3, A-4, A-5, A-6, A-7</td> </tr> <tr> <td>SYMBOL</td> <td>[Patterns]</td> <td>[Patterns]</td> <td>[Patterns]</td> </tr> <tr> <td>% PASSING #10 #40 #200</td> <td>50 MX, 30 MX, 15 MX, 10 MX, 5 MN, 10 MN, 35 MX, 10 MN, 35 MN, 35 MX, 10 MN</td> <td>10 MN, 11 MN, 40 MX, 11 MN, 10 MN, 11 MN, 10 MN, 11 MN</td> <td>GRANULAR SOILS, SILT-CLAY SOILS, MUCK, PEAT</td> </tr> </table>				GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)	SILT-CLAY MATERIALS (> 35% PASSING #200)	ORGANIC MATERIALS	GROUP CLASS.	A-1, A-3, A-2-4, A-2-5, A-2-6, A-2-7	A-4, A-5, A-6, A-7	A-1, A-2, A-3, A-4, A-5, A-6, A-7	SYMBOL	[Patterns]	[Patterns]	[Patterns]	% PASSING #10 #40 #200	50 MX, 30 MX, 15 MX, 10 MX, 5 MN, 10 MN, 35 MX, 10 MN, 35 MN, 35 MX, 10 MN	10 MN, 11 MN, 40 MX, 11 MN, 10 MN, 11 MN, 10 MN, 11 MN	GRANULAR SOILS, SILT-CLAY SOILS, MUCK, PEAT	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>> 10%</td> <td>> 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table>				ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>WEATHERED ROCK (WR)</th> <th>CRYSTALLINE ROCK (CR)</th> <th>NON-CRYSTALLINE ROCK (NCR)</th> <th>COASTAL PLAIN SEDIMENTARY ROCK (CP)</th> </tr> <tr> <td>NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.</td> <td>FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.</td> <td>FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.</td> <td>COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.</td> </tr> </table>				WEATHERED ROCK (WR)	CRYSTALLINE ROCK (CR)	NON-CRYSTALLINE ROCK (NCR)	COASTAL PLAIN SEDIMENTARY ROCK (CP)	NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.	FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.	FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.	COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.																				
GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)	SILT-CLAY MATERIALS (> 35% PASSING #200)	ORGANIC MATERIALS																																																																								
GROUP CLASS.	A-1, A-3, A-2-4, A-2-5, A-2-6, A-2-7	A-4, A-5, A-6, A-7	A-1, A-2, A-3, A-4, A-5, A-6, A-7																																																																								
SYMBOL	[Patterns]	[Patterns]	[Patterns]																																																																								
% PASSING #10 #40 #200	50 MX, 30 MX, 15 MX, 10 MX, 5 MN, 10 MN, 35 MX, 10 MN, 35 MN, 35 MX, 10 MN	10 MN, 11 MN, 40 MX, 11 MN, 10 MN, 11 MN, 10 MN, 11 MN	GRANULAR SOILS, SILT-CLAY SOILS, MUCK, PEAT																																																																								
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																								
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%																																																																								
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%																																																																								
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%																																																																								
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																								
WEATHERED ROCK (WR)	CRYSTALLINE ROCK (CR)	NON-CRYSTALLINE ROCK (NCR)	COASTAL PLAIN SEDIMENTARY ROCK (CP)																																																																								
NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.	FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.	FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.	COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.																																																																								
CONSISTENCY OR DENSENESS												GROUND WATER																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td> <td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td> </tr> </table>				PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	<p> WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP </p>																																																											
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																								
GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																								
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																								
TEXTURE OR GRAIN SIZE												MISCELLANEOUS SYMBOLS																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <td></td> <td>4.75</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </table>				U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.75	2.00	0.42	0.25	0.075	0.053	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>				BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)								<p> ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY </p> <p> 25/025 DIP & DIP DIRECTION OF ROCK STRUCTURES SPT SPT DMT VST TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD TEST BORING WITH CORE SPT N-VALUE </p>																																							
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																					
	4.75	2.00	0.42	0.25	0.075	0.053																																																																					
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																					
SOIL MOISTURE - CORRELATION OF TERMS												RECOMMENDATION SYMBOLS																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT</td> <td>- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>				SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>UNDERCUT EXCAVATION</th> <th>UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE</th> <th>UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK</th> <th>UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL</th> </tr> <tr> <td>[Symbol]</td> <td>[Symbol]</td> <td>[Symbol]</td> <td>[Symbol]</td> </tr> </table>				UNDERCUT EXCAVATION	UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE	UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK	UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL	[Symbol]	[Symbol]	[Symbol]	[Symbol]	ABBREVIATIONS																																																					
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																									
LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																									
UNDERCUT EXCAVATION	UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE	UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK	UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL																																																																								
[Symbol]	[Symbol]	[Symbol]	[Symbol]																																																																								
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT</td> <td>- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>				SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>AR - AUGER REFUSAL</th> <th>BT - BORING TERMINATED</th> <th>CL - CLAY</th> <th>CPT - CONE PENETRATION TEST</th> <th>CSE - COARSE</th> <th>DMT - DILATOMETER TEST</th> <th>DPT - DYNAMIC PENETRATION TEST</th> <th>e - VOID RATIO</th> <th>F - FINE</th> <th>FOSS. - FOSSILIFEROUS</th> <th>FRAC. - FRACTURED, FRACTURES</th> <th>FRAGS. - FRAGMENTS</th> <th>HI. - HIGHLY</th> <th>MED. - MEDIUM</th> <th>MICA. - MICACEOUS</th> <th>MOD. - MODERATELY</th> <th>NP - NON PLASTIC</th> <th>ORG. - ORGANIC</th> <th>PMT - PRESSUREMETER TEST</th> <th>SAP. - SAPROLITIC</th> <th>SD. - SAND, SANDY</th> <th>SL. - SILT, SILTY</th> <th>SLI. - SLIGHTLY</th> <th>TCR - TRICONE REFUSAL</th> <th>w - MOISTURE CONTENT</th> <th>V - VERY</th> <th>VST - VANE SHEAR TEST</th> <th>WEA. - WEATHERED</th> <th>γ - UNIT WEIGHT</th> <th>γ_d - DRY UNIT WEIGHT</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>				AR - AUGER REFUSAL	BT - BORING TERMINATED	CL - CLAY	CPT - CONE PENETRATION TEST	CSE - COARSE	DMT - DILATOMETER TEST	DPT - DYNAMIC PENETRATION TEST	e - VOID RATIO	F - FINE	FOSS. - FOSSILIFEROUS	FRAC. - FRACTURED, FRACTURES	FRAGS. - FRAGMENTS	HI. - HIGHLY	MED. - MEDIUM	MICA. - MICACEOUS	MOD. - MODERATELY	NP - NON PLASTIC	ORG. - ORGANIC	PMT - PRESSUREMETER TEST	SAP. - SAPROLITIC	SD. - SAND, SANDY	SL. - SILT, SILTY	SLI. - SLIGHTLY	TCR - TRICONE REFUSAL	w - MOISTURE CONTENT	V - VERY	VST - VANE SHEAR TEST	WEA. - WEATHERED	γ - UNIT WEIGHT	γ _d - DRY UNIT WEIGHT																																
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																									
LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																									
AR - AUGER REFUSAL	BT - BORING TERMINATED	CL - CLAY	CPT - CONE PENETRATION TEST	CSE - COARSE	DMT - DILATOMETER TEST	DPT - DYNAMIC PENETRATION TEST	e - VOID RATIO	F - FINE	FOSS. - FOSSILIFEROUS	FRAC. - FRACTURED, FRACTURES	FRAGS. - FRAGMENTS	HI. - HIGHLY	MED. - MEDIUM	MICA. - MICACEOUS	MOD. - MODERATELY	NP - NON PLASTIC	ORG. - ORGANIC	PMT - PRESSUREMETER TEST	SAP. - SAPROLITIC	SD. - SAND, SANDY	SL. - SILT, SILTY	SLI. - SLIGHTLY	TCR - TRICONE REFUSAL	w - MOISTURE CONTENT	V - VERY	VST - VANE SHEAR TEST	WEA. - WEATHERED	γ - UNIT WEIGHT	γ _d - DRY UNIT WEIGHT																																														
PLASTICITY												EQUIPMENT USED ON SUBJECT PROJECT																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>NON PLASTIC</th> <th>SLIGHTLY PLASTIC</th> <th>MODERATELY PLASTIC</th> <th>HIGHLY PLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>0-5 6-15 16-25 26 OR MORE</td> <td>VERY LOW SLIGHT MEDIUM HIGH</td> </tr> </table>				NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH					0-5 6-15 16-25 26 OR MORE	VERY LOW SLIGHT MEDIUM HIGH	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> <th>CORE SIZE:</th> <th>HAND TOOLS:</th> </tr> <tr> <td><input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input checked="" type="checkbox"/> CME-550X <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST</td> <td><input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input checked="" type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input type="checkbox"/> TRICONE * STEEL TEETH <input type="checkbox"/> TRICONE * TUNG-CARB. <input type="checkbox"/> CORE BIT</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> <td><input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N</td> <td><input type="checkbox"/> POST HOLE DIGGER <input type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST</td> </tr> </table>				DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	CORE SIZE:	HAND TOOLS:	<input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input checked="" type="checkbox"/> CME-550X <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input checked="" type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input type="checkbox"/> TRICONE * STEEL TEETH <input type="checkbox"/> TRICONE * TUNG-CARB. <input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N	<input type="checkbox"/> POST HOLE DIGGER <input type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST																																														
NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																						
				0-5 6-15 16-25 26 OR MORE	VERY LOW SLIGHT MEDIUM HIGH																																																																						
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	CORE SIZE:	HAND TOOLS:																																																																							
<input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input checked="" type="checkbox"/> CME-550X <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input checked="" type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input type="checkbox"/> TRICONE * STEEL TEETH <input type="checkbox"/> TRICONE * TUNG-CARB. <input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N	<input type="checkbox"/> POST HOLE DIGGER <input type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST																																																																							
COLOR												FRACURE SPACING																																																															
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-BROWN). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.												<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td></td> <td></td> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table>				TERM	SPACING	TERM	THICKNESS	VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET	WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET	CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET	VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET			THINLY LAMINATED	< 0.008 FEET																																
TERM	SPACING	TERM	THICKNESS																																																																								
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET																																																																								
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET																																																																								
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET																																																																								
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																								
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET																																																																								
		THINLY LAMINATED	< 0.008 FEET																																																																								
INDURATION												NOTES:																																																															
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.												<p> FIAD - FILLED IMMEDIATELY AFTER DRILLING L.T. = LIGHT DK. = DARK W/ = WITH </p>																																																															
FRACURE SPACING												INDURATION																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td></td> <td></td> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table>												TERM	SPACING	TERM	THICKNESS	VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET	WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET	CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET	VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET			THINLY LAMINATED	< 0.008 FEET	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>FRIBLE</th> <th>MODERATELY INDURATED</th> <th>INDURATED</th> <th>EXTREMELY INDURATED</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table>				FRIBLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																												
TERM	SPACING	TERM	THICKNESS																																																																								
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET																																																																								
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET																																																																								
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET																																																																								
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																								
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET																																																																								
		THINLY LAMINATED	< 0.008 FEET																																																																								
FRIBLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																																																																								
FRACURE SPACING												INDURATION																																																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td></td> <td></td> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table>												TERM	SPACING	TERM	THICKNESS	VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET	WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET	CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET	VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET			THINLY LAMINATED	< 0.008 FEET	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>FRIBLE</th> <th>MODERATELY INDURATED</th> <th>INDURATED</th> <th>EXTREMELY INDURATED</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table>				FRIBLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																												
TERM	SPACING	TERM	THICKNESS																																																																								
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET																																																																								
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET																																																																								
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET																																																																								
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																								
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET																																																																								
		THINLY LAMINATED	< 0.008 FEET																																																																								
FRIBLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																																																																								

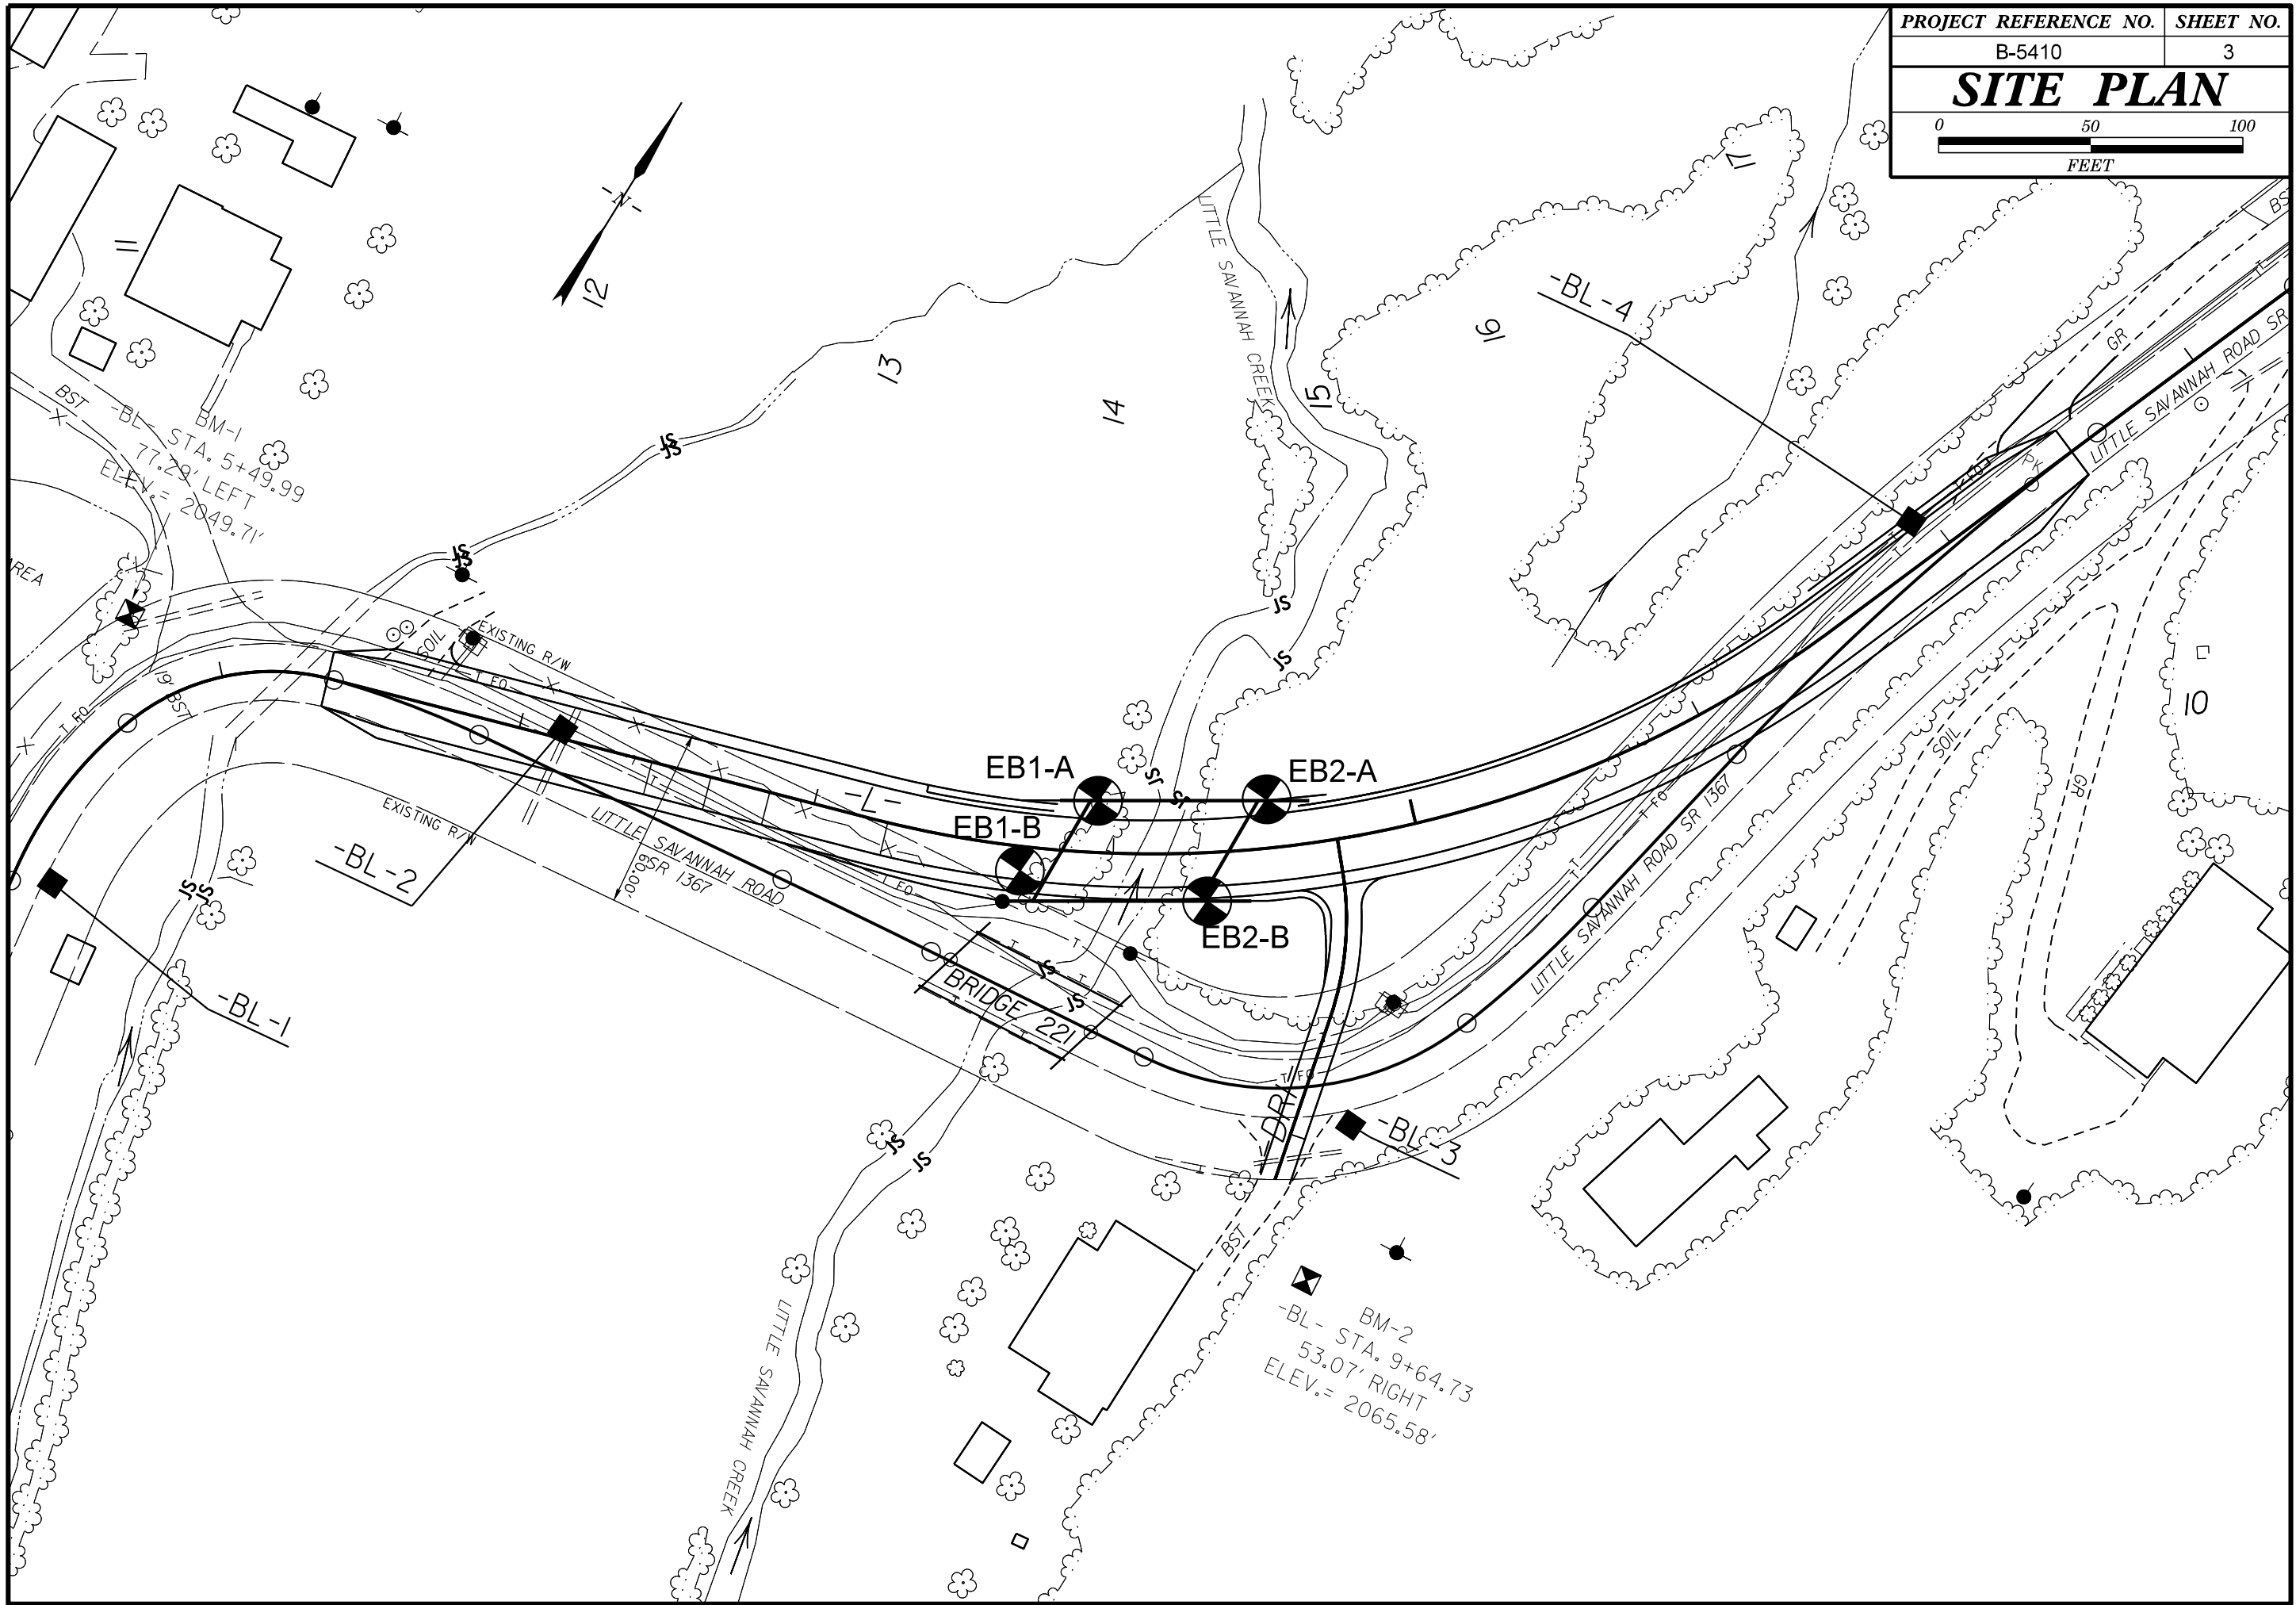

8/23/99

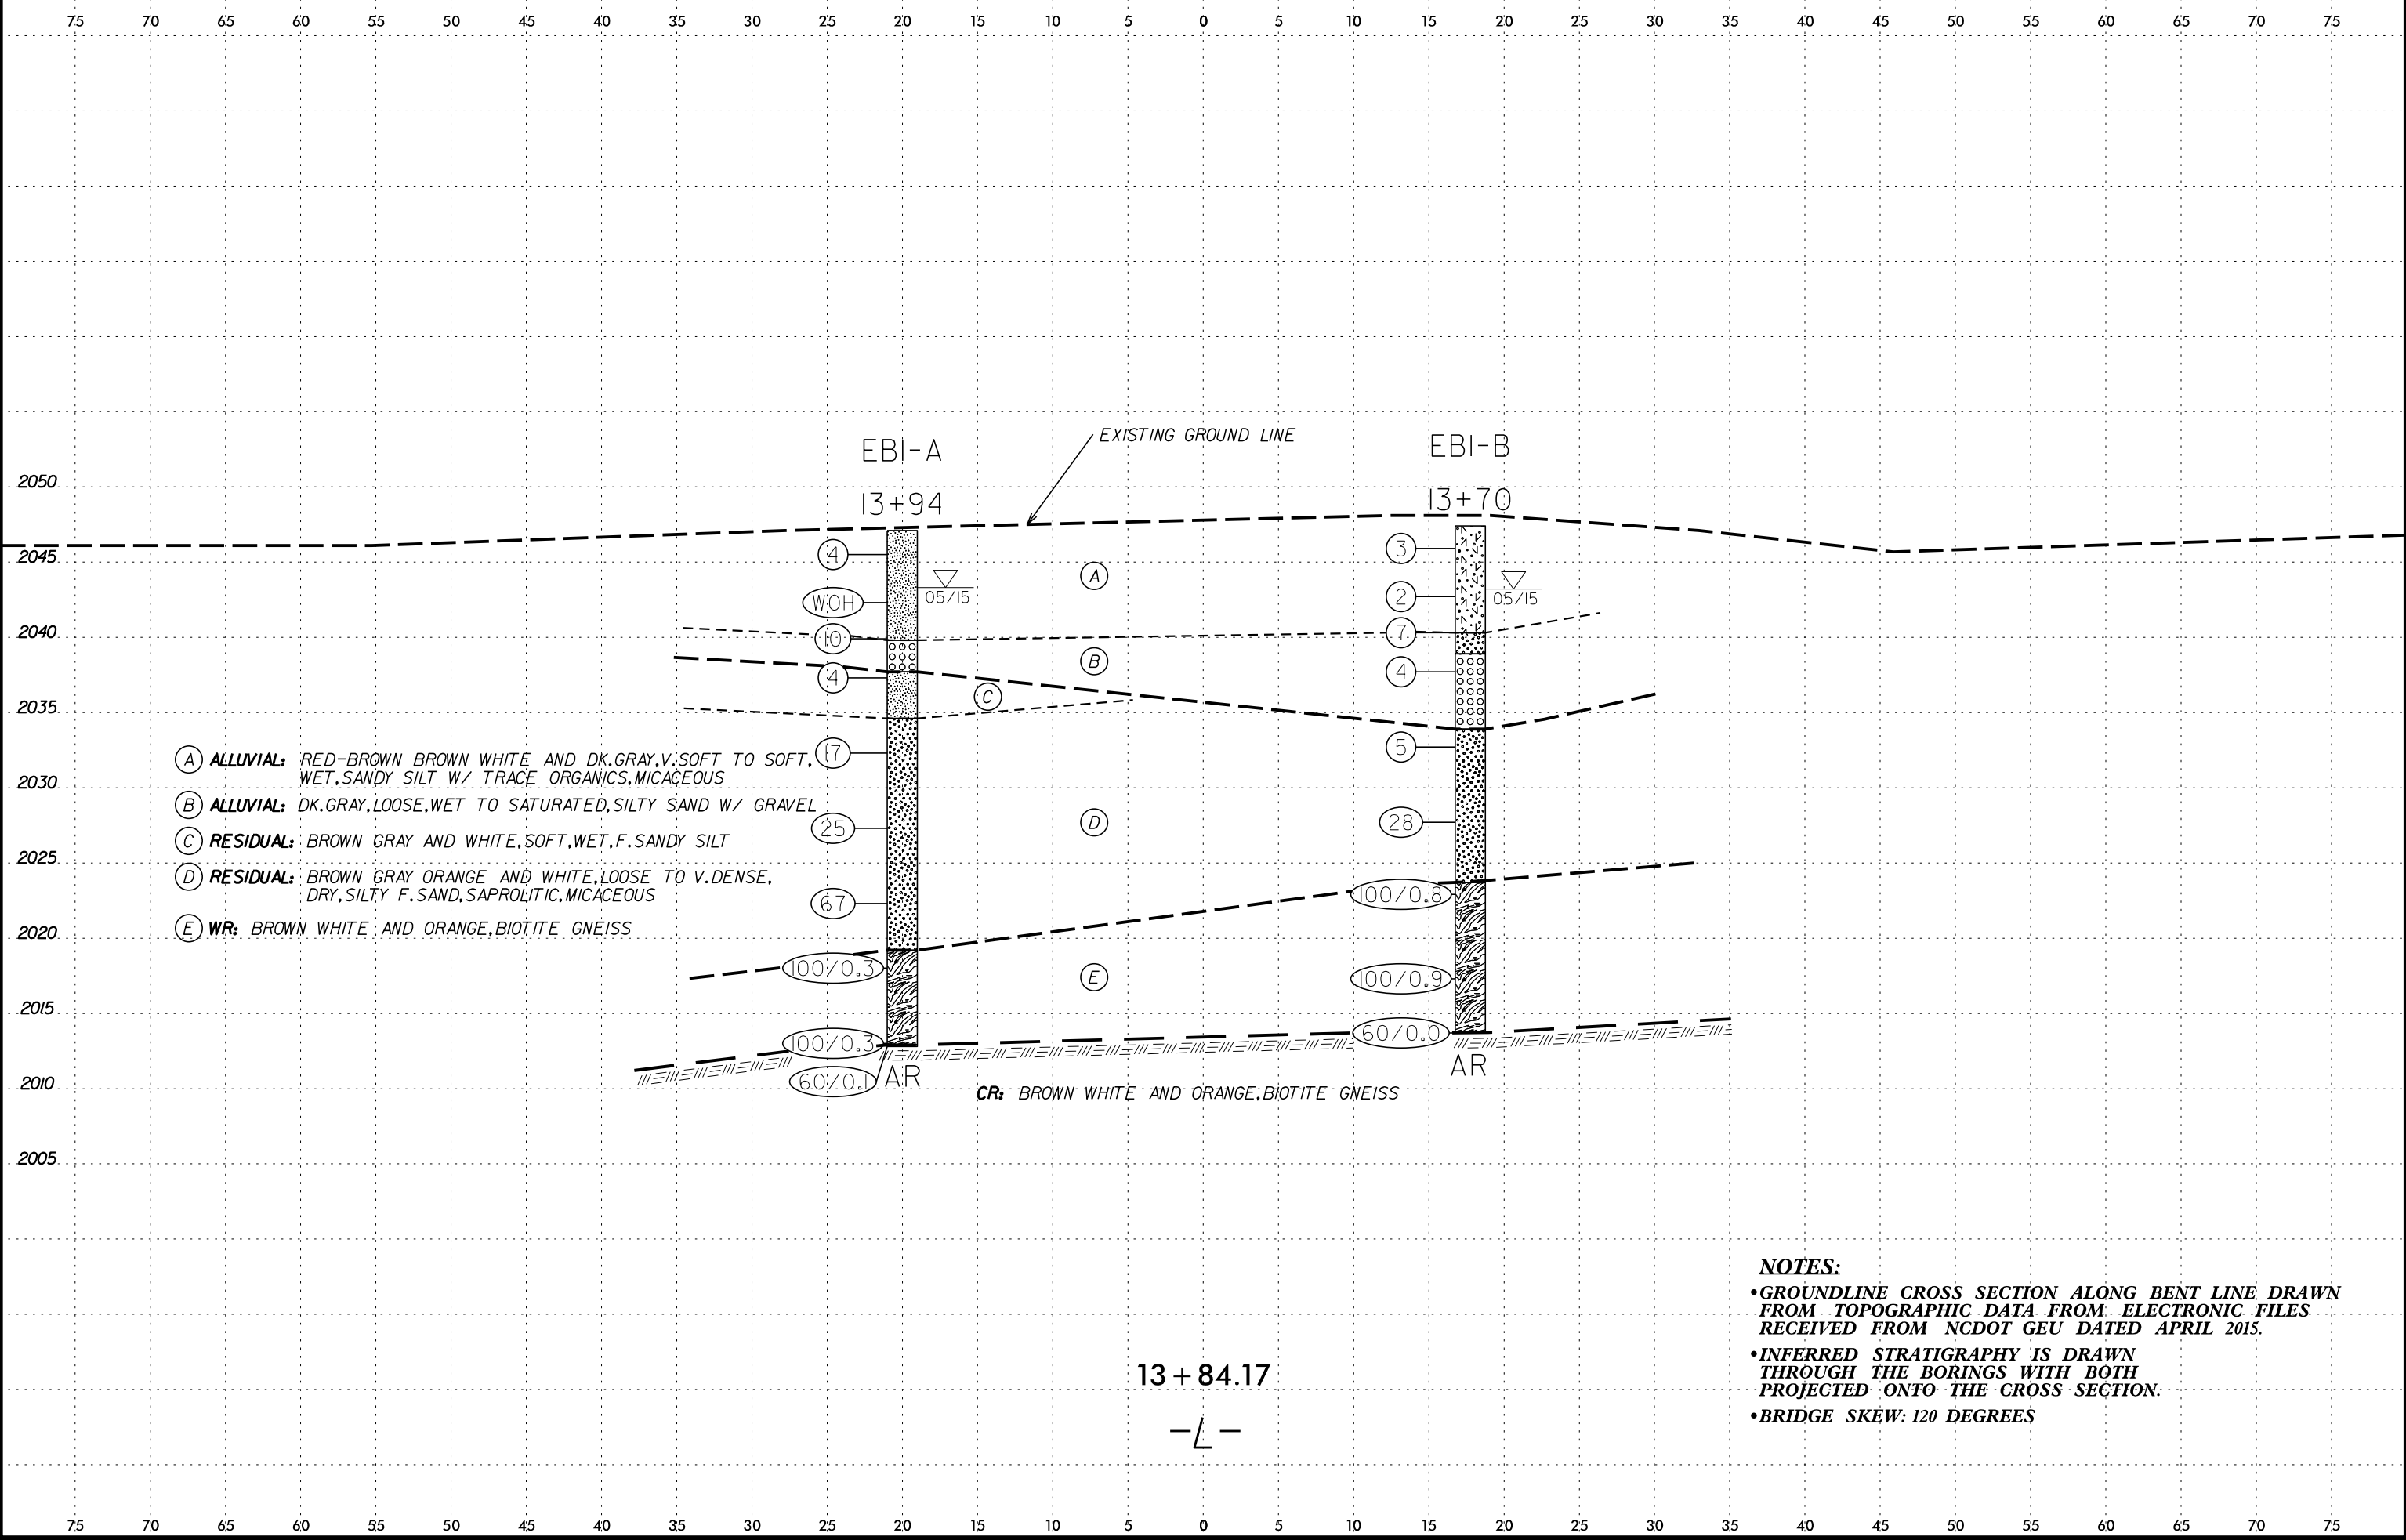

8/23/99

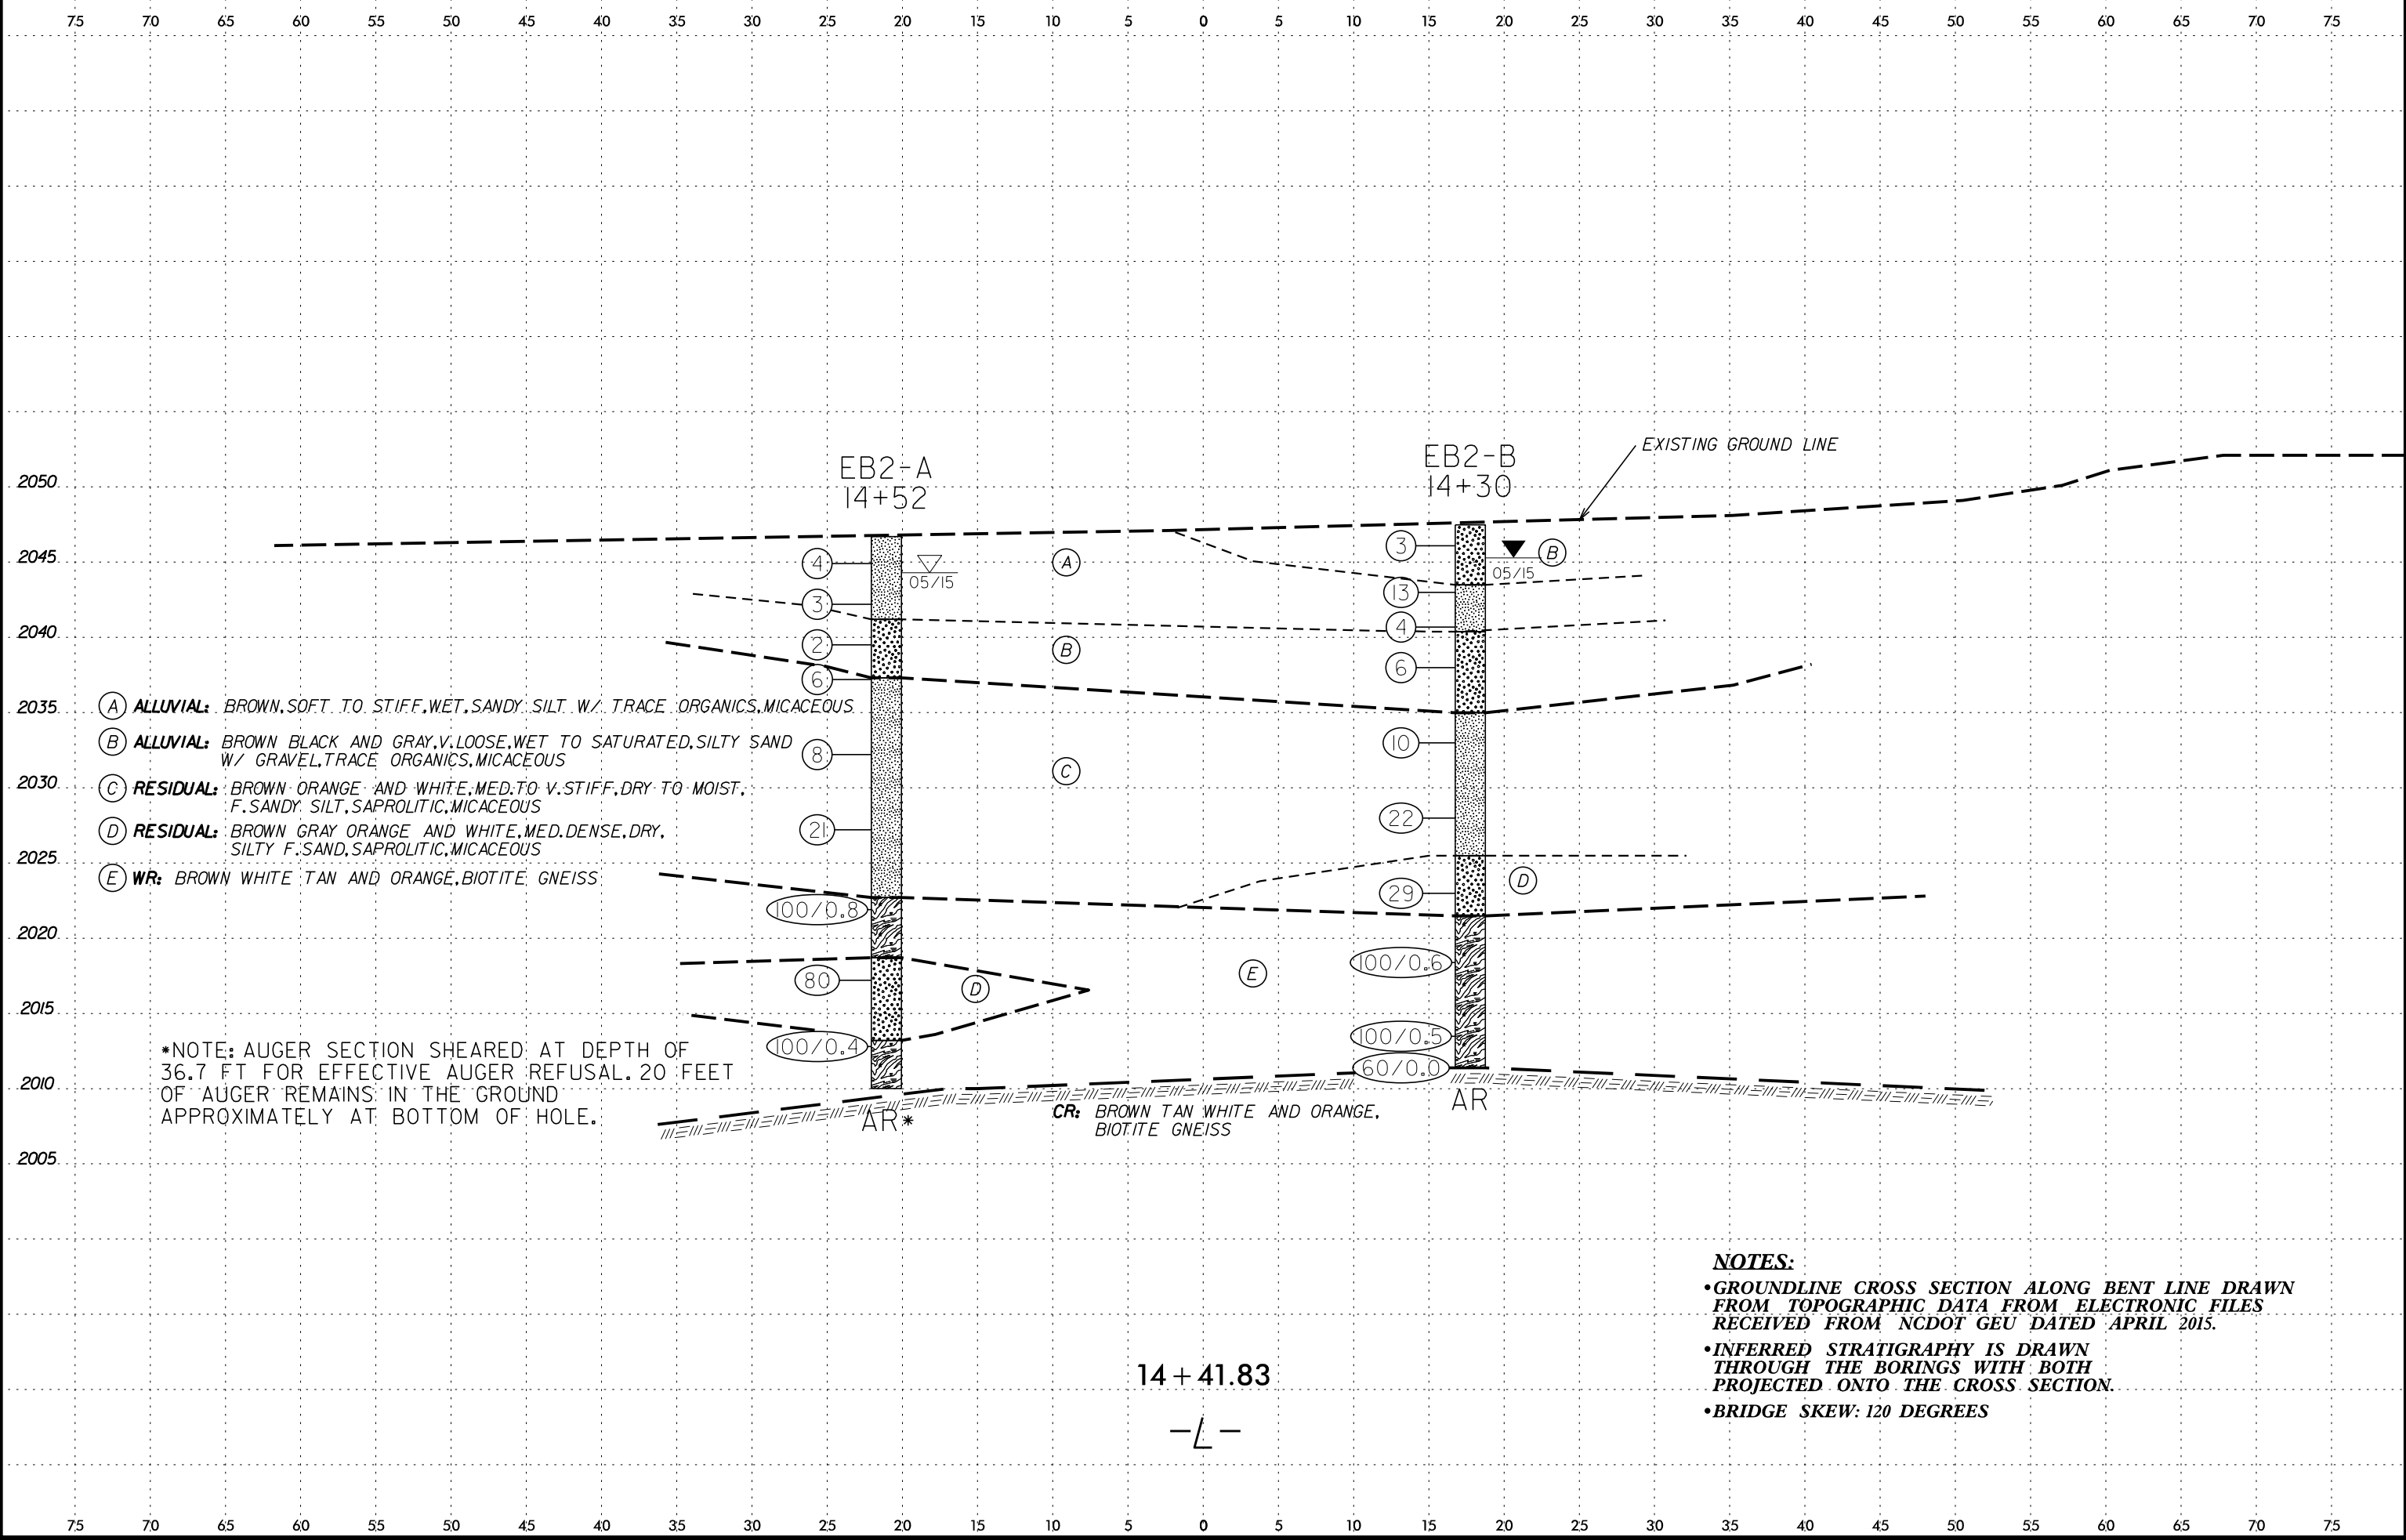

*NOTE: AUGER SECTION SHEARED AT DEPTH OF 36.7 FT FOR EFFECTIVE AUGER REFUSAL. 20 FEET OF AUGER REMAINS IN THE GROUND APPROXIMATELY AT BOTTOM OF HOLE.

14 + 41.83

-L-

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 46125.1.1		TIP B-5410		COUNTY JACKSON		GEOLOGIST Hunsberger, W. S.										
SITE DESCRIPTION BRIDGE 221 ON 1367 OVER LITTLE SAVANNAH CREEK						GROUND WTR (ft)										
BORING NO. EB1-A		STATION 13+94		OFFSET 17 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 2,047.0 ft		TOTAL DEPTH 34.3 ft		NORTHING 602,888		EASTING 737,936										
DRILL RIG/HAMMER EFF./DATE SDS1873 CME-550X 87% 09/05/2014		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic												
DRILLER Contract Driller		START DATE 05/01/15		COMP. DATE 05/01/15		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2050																
2045	2,046.4	0.6	1	2	2							W	0.3' TOPSOIL	0.0		
2040	2,043.2	3.8	WOH	WOH	WOH							SS-1	41% ALLUVIAL BROWN AND DK. GRAY, SANDY SILT (A-4) W/ TRACE ORGANICS, SLI. MICA.			
2035	2,038.2	8.8	4	2	2							W	DK. GRAY, SILTY CSE. SAND (A-1-b) W/ GRAVEL	7.3		
2030	2,033.2	13.8	6	8	9							W	RESIDUAL BROWN GRAY AND WHITE, F. SANDY SILT (A-4)	9.4		
2025	2,028.2	18.8	5	12	13							D	BROWN GRAY WHITE AND ORANGE, SILTY F. SAND (A-2-4) SAP., MICA.	12.5		
2020	2,023.2	23.8	16	24	43							D	WEATHERED ROCK BLACK WHITE AND ORANGE, BIOTITE GNEISS	27.9		
2015	2,018.2	28.8	100/0.3									D	WEATHERED ROCK BLACK WHITE AND ORANGE, BIOTITE GNEISS	34.2		
	2,012.8	34.2	100/0.3									D	CRYSTALLINE ROCK BLACK WHITE AND ORANGE, BIOTITE GNEISS	34.3		
	2,012.7	34.3	60/0.1										Boring Terminated with Standard Penetration Test Refusal at Elevation 2,012.7 ft in CR: BIOTITE GNEISS			

WBS 46125.1.1		TIP B-5410		COUNTY JACKSON		GEOLOGIST Hunsberger, W. S.										
SITE DESCRIPTION BRIDGE 221 ON 1367 OVER LITTLE SAVANNAH CREEK						GROUND WTR (ft)										
BORING NO. EB1-B		STATION 13+70		OFFSET 8 ft RT		ALIGNMENT -L-										
COLLAR ELEV. 2,047.3 ft		TOTAL DEPTH 33.7 ft		NORTHING 602,854		EASTING 737,929										
DRILL RIG/HAMMER EFF./DATE SDS1873 CME-550X 87% 09/05/2014		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic												
DRILLER Contract Driller		START DATE 05/01/15		COMP. DATE 05/01/15		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2050																
2045	2,046.8	0.5	2	1	2							M	0.2' TOPSOIL	0.0		
2040	2,043.6	3.7	1	1	1							SS-2	45% ALLUVIAL RED-BROWN AND DK. GRAY, F. SANDY SILT (A-5) W/ TRACE ORGANICS, MICA.			
2035	2,038.6	8.7	5	2	2							W	DK. GRAY, SILTY SAND (A-2-4) W/ GRAVEL	7.1		
2030	2,033.6	13.7	1	3	2							Sat.	DK. GRAY, SILTY SAND (A-1-b) W/ GRAVEL	8.5		
2025	2,028.6	18.7	6	12	16							Sat.	LOW RECOVERY FROM 13.7'-15.2'	13.5		
2020	2,023.6	23.7	38	62/0.3								D	RESIDUAL BROWN AND ORANGE, SILTY F. SAND (A-2-4) SAP., MICA.	23.7		
2015	2,018.6	28.7	30	47	53/0.4							D	WEATHERED ROCK BROWN WHITE AND ORANGE, BIOTITE GNEISS	23.7		
	2,013.6	33.7	60/0.0										Boring Terminated with Standard Penetration Test Refusal at Elevation 2,013.6 ft on CR: BIOTITE GNEISS			

NCDOT BORE DOUBLE B5410_GEO_BORINGS.GPJ NC_DOT_GDT 6/22/15

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 46125.1.1		TIP B-5410		COUNTY JACKSON		GEOLOGIST Hunsberger, W. S.										
SITE DESCRIPTION BRIDGE 221 ON 1367 OVER LITTLE SAVANNAH CREEK						GROUND WTR (ft)										
BORING NO. EB2-A		STATION 14+52		OFFSET 16 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 2,047.0 ft		TOTAL DEPTH 36.7 ft		NORTHING 602,919		EASTING 737,981										
DRILL RIG/HAMMER EFF./DATE SDS1873 CME-550X 87% 09/05/2014		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic												
DRILLER Contract Driller		START DATE 04/30/15		COMP. DATE 05/01/15		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2050																
2045	2,046.2	0.8	1	2	2									2,047.0	0.2' TOPSOIL	0.0
	2,043.5	3.5	WOH	1	2										ALLUVIAL LT. AND DK. BROWN, F. SANDY SILT (A-4) W/ TRACE ORGANICS, MICA.	
2040	2,040.8	6.2	WOH	WOH	2									2,041.5	BLACK, SILTY F. SAND (A-2-5) W/ TRACE ORGANICS, WOOD PIECES AND GRAVEL, MICA.	5.5
	2,038.5	8.5												2,037.6	GRAVEL LAYER AT 9.2'	9.4
2035	2,033.5	13.5													RESIDUAL ORANGE AND BROWN, F. SANDY SILT (A-4) MICA., SAP.	
2030	2,028.5	18.5														
2025	2,023.5	23.5	11	9	12											
	2,023.5	23.5	22	45	55/0.3									2,023.0	WEATHERED ROCK TAN AND WHITE, BIOTITE GNEISS	24.0
2020	2,018.5	28.5	22	23	57									2,019.0	RESIDUAL TAN BROWN AND WHITE, SILTY SAND (A-2-4) SAP.	28.0
	2,013.5	33.5	100/0.4											2,013.5	WEATHERED ROCK BROWN AND TAN, BIOTITE GNEISS	33.5
2015														2,010.3	Boring Terminated by Auger Refusal at Elevation 2,010.3 ft on CR: BIOTITE GNEISS	36.7
NOTE: AUGER SECTION SHEARED AT DEPTH OF 36.7 FT FOR EFFECTIVE AUGER REFUSAL. 20 FEET OF AUGER REMAINS IN THE GROUND APPROXIMATELY AT BOTTOM OF HOLE.																

WBS 46125.1.1		TIP B-5410		COUNTY JACKSON		GEOLOGIST Hunsberger, W. S.										
SITE DESCRIPTION BRIDGE 221 ON 1367 OVER LITTLE SAVANNAH CREEK						GROUND WTR (ft)										
BORING NO. EB2-B		STATION 14+30		OFFSET 16 ft RT		ALIGNMENT -L-										
COLLAR ELEV. 2,047.7 ft		TOTAL DEPTH 36.1 ft		NORTHING 602,881		EASTING 737,985										
DRILL RIG/HAMMER EFF./DATE SDS1873 CME-550X 87% 09/05/2014		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic												
DRILLER Contract Driller		START DATE 04/30/15		COMP. DATE 04/30/15		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2050																
2045	2,047.3	0.4	1	2	1									2,047.7	0.3' TOPSOIL	0.0
	2,044.2	3.5	5	6	7									2,043.7	ALLUVIAL BROWN, SILTY F. SAND (A-2-4) W/ TRACE ROOTS, MICA.	4.0
2040	2,041.9	5.8	2	2	2									2,040.6	BROWN, F. SANDY SILT (A-4) W/ TRACE MICA	7.1
	2,039.2	8.5	1	3	3									2,035.2	DK. BROWN AND GRAY, SILTY SAND (A-2-4) W/ TRACE ORGANICS, W/ GRAVEL, MICA.	12.5
2035	2,034.2	13.5	2	4	6										RESIDUAL BROWN ORANGE AND WHITE, F. SANDY SILT (A-4) SAP., MICA.	
2030	2,029.2	18.5	4	7	15											
2025	2,024.2	23.5	6	11	18									2,025.7	BROWN ORANGE AND WHITE, SILTY F. SAND (A-2-4) W/ TRACE MICA, SAP.	22.0
	2,021.7	26.0												2,021.7	WEATHERED ROCK BROWN ORANGE AND WHITE, BIOTITE GNEISS	26.0
2020	2,019.2	28.5	80	20/0.1												
	2,014.2	33.5	100/0.5											2,011.6	WEATHERED ROCK BROWN ORANGE AND WHITE, BIOTITE GNEISS	36.1
2015	2,011.6	36.1	60/0.0											2,011.6	Boring Terminated with Standard Penetration Test Refusal at Elevation 2,011.6 ft on CR: BIOTITE GNEISS	36.1

NCDOT BORE DOUBLE B5410_GEO_BORINGS.GPJ NC_DOT.GDT 6/22/15

AASHTO SOIL CLASSIFICATION AND GRADATION SHEET

BRIDGE NO. 221 ON SR 1367 OVER LITTLE SAVANNAH CREEK

WBS NO.: 46125.1.1, TIP NO.: B-5410

JACKSON COUNTY, NORTH CAROLINA
FALCON ENGINEERING, INC. PROJECT NO: G15013.00

BORING		SAMPLE	TOTAL SAMPLE			Atterberg Limit Test Results			Natural Moisture Content
AASHTO Classification			PERCENT PASSING			LL	PL	PI	%
STATION	OFFSET (FEET)	DEPTH (FEET)	#10	#40	#200				
EB1A		SS-1	100	97	51	33	NP	NP	40.6
A-4									
13+94	17 ft LT	3.8-5.3							
EB1-B		SS-2	100	96	57	42	NP	NP	45.0
A-5									
13+70	8 ft RT	3.7-5.2							
EB2-A		SS-3	75	59	22	51	NP	NP	-
A-2-5									
14+52	16 ft LT	6.2-7.7							
EB2-B		SS-4	100	98	46	33	NP	NP	36.5
A-4									
14+30	16 ft RT	0.4-1.9							

SIGNATURE



105-03-0803

Notes: LL = Liquid limit
 PL = Plastic limit
 PI = Plasticity index = LL - PL



LOOKING FORWARD EB2-A FROM EB2-B



LOOKING DOWNSTATION FORWARD END BENT ONE FROM END BENT TWO



LOOKING UPSTATION FROM EXISTING ROADWAY TOWARD END BENT ONE



DRILL RIG SET UP ON EB1-A



FALCON ENGINEERING, INC.
1210 TRINITY ROAD, SUITE 110
RALEIGH, NC 27607
PHONE: 919.871.0800
FAX: 919.871.0803

SITE PHOTOGRAPHS

REPLACE BRIDGE NO. 221 ON SR 1367
OVER LITTLE SAVANNAH CREEK
JACKSON COUNTY, NC
WBS NO.:46125.1.1 TIP NO.: B-5410