


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

**PAVEMENT SCHEDULE**  
(FINAL PAVEMENT DESIGN)


C1	1.5" S9.5B
C2	1.5" S9.5C
C3	2" S9.5B
C4	2" S9.5C
C5	3" S9.5B
C6	3" S9.5C
C7	VAR. DEPTH S9.5B
D1	2.5" I19.0C
D2	4" I19.0B
D3	4" I19.0C
D4	VAR. DEPTH I19.0B
E1	4" B25.0B
E2	4" B25.0C
E3	4.5" B25.0B
E4	5" B25.0B
E5	5" B25.0C
E6	5.5" B25.0B
E7	VAR. DEPTH B25.0B
J1	6" AGGREGATE BASE COURSE
J2	CLASS IV SELECT MATERIAL
L	CLASS IV SUBGRADE STABILIZATION
N1	GEOTEXTILE FOR PAVEMENT STABILIZATION
N2	GEOTEXTILE FOR SOIL STABILIZATION
R1	2'-6" CONCRETE CURB & GUTTER
R2	SPECIAL 2'-6" CURB & GUTTER, SEE SHEET 2C-6
R3	5" MONOLITHIC CONCRETE ISLAND (KEYED-IN)
R4	8" X 12" CONCRETE CURB
R5	8" X 18" CONCRETE CURB
S	4" CONCRETE SIDEWALK
T	EARTH MATERIAL
U	EXISTING PAVEMENT
VI	MILLING EXISTING PAVEMENT (1.5')
W	WEDGING

PAVEMENT EDGE SLOPES ARE 1:1 UNLESS OTHERWISE INDICATED

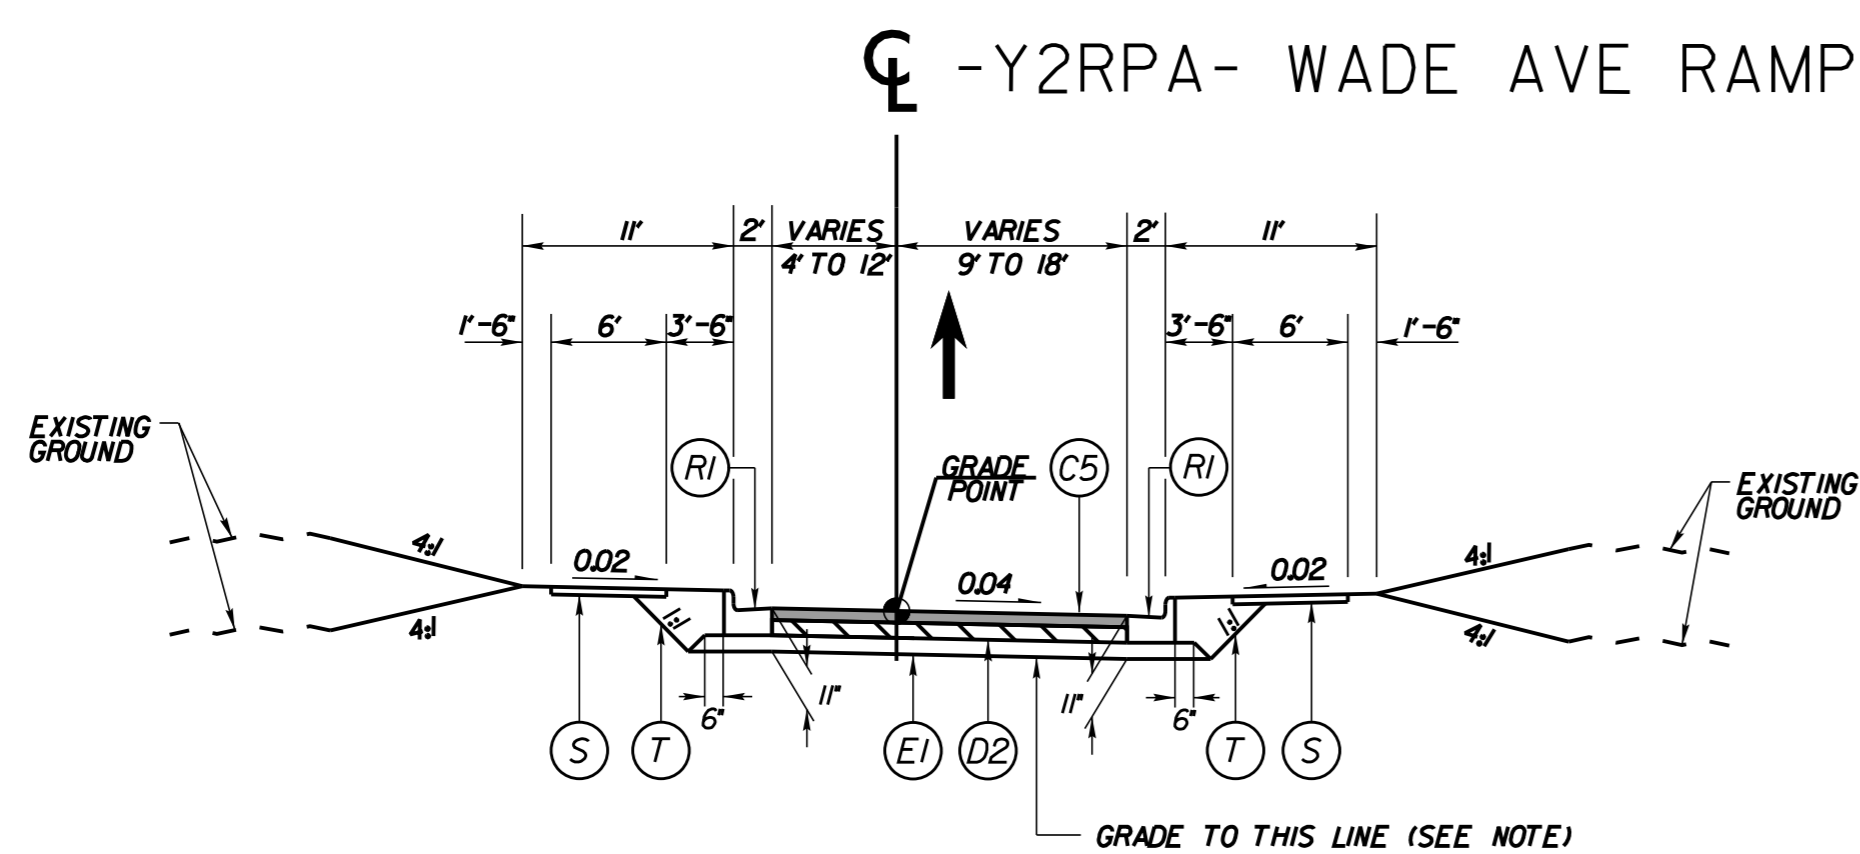


**TYPICAL SECTION NO. 8**  
-Y2RPA- STA 16+57.00 TO STA 18+38.40

NOTE: MILL (INCIDENTAL) AND OVERLAY EXISTING PAVEMENT WHERE APPLICABLE IN ACCORDANCE WITH WEDGING DETAIL FOR RESURFACING

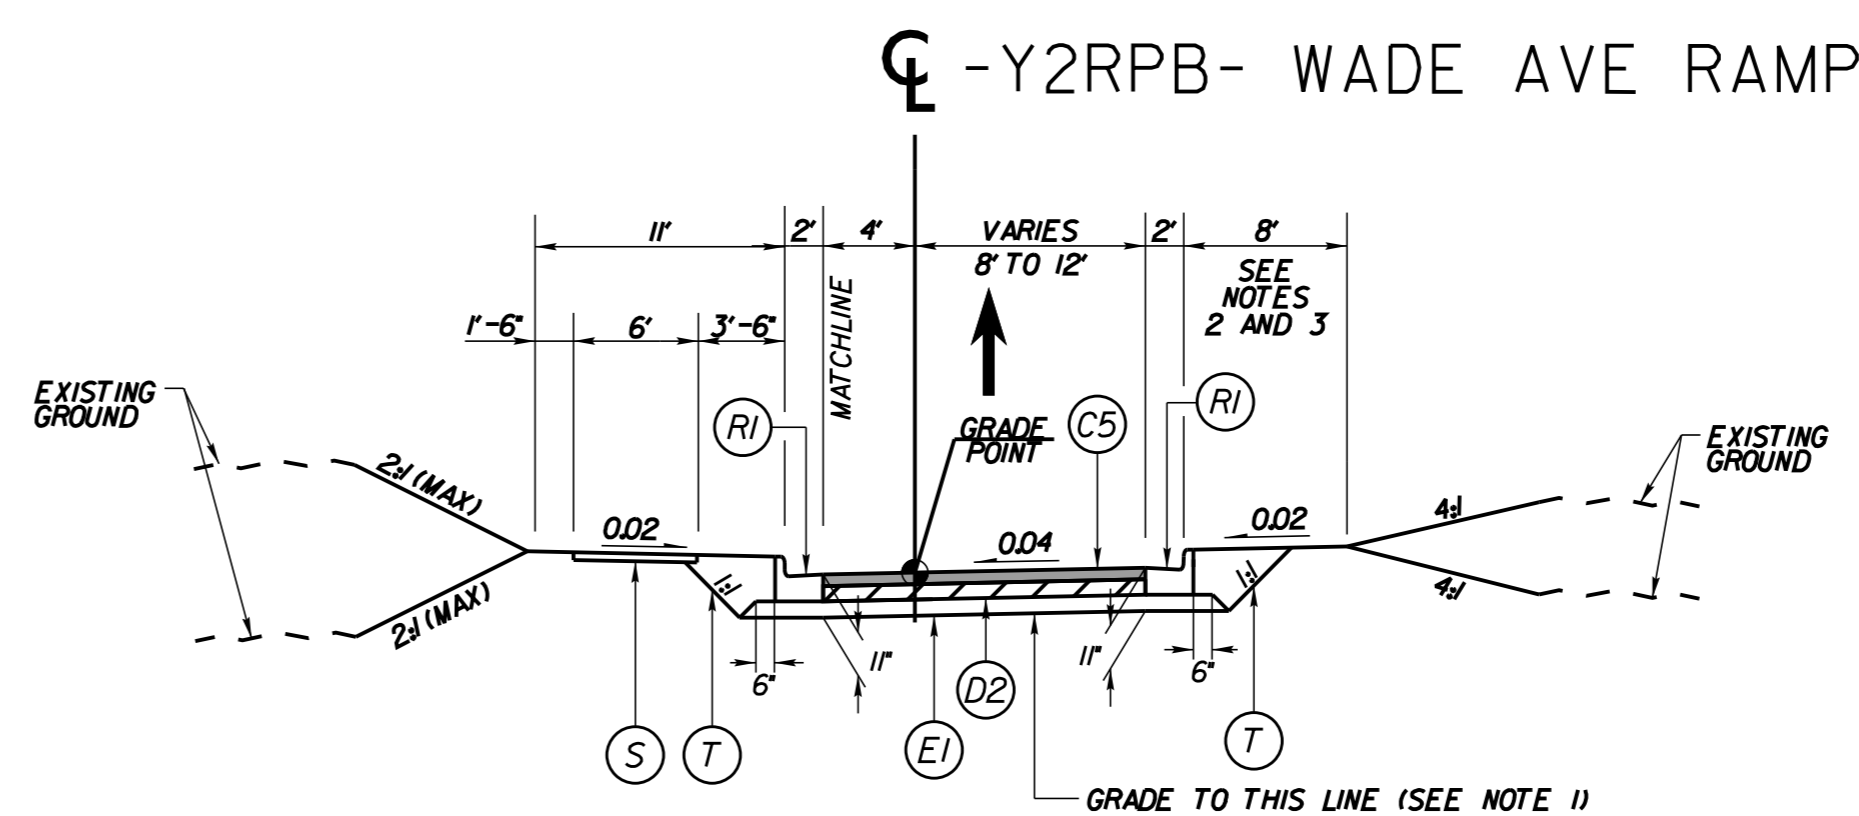


**TYPICAL SECTION NO. 9**  
-Y2RPB- STA 10+41.83 TO STA 15+83.50


NOTES:  
1. OVERLAY EXISTING PAVEMENT WHERE APPLICABLE IN ACCORDANCE WITH WEDGING DETAIL FOR RESURFACING  
2. USE 4' BERM ON -Y2RPB- FROM STA 12+15.00 TO 12+55.00 (RT)  
3. CONSTRUCT 6' SIDEWALK FROM BACK OF CURB FROM -Y2RPB- STA 13+73.63 TO STA 14+95.37 (RT)

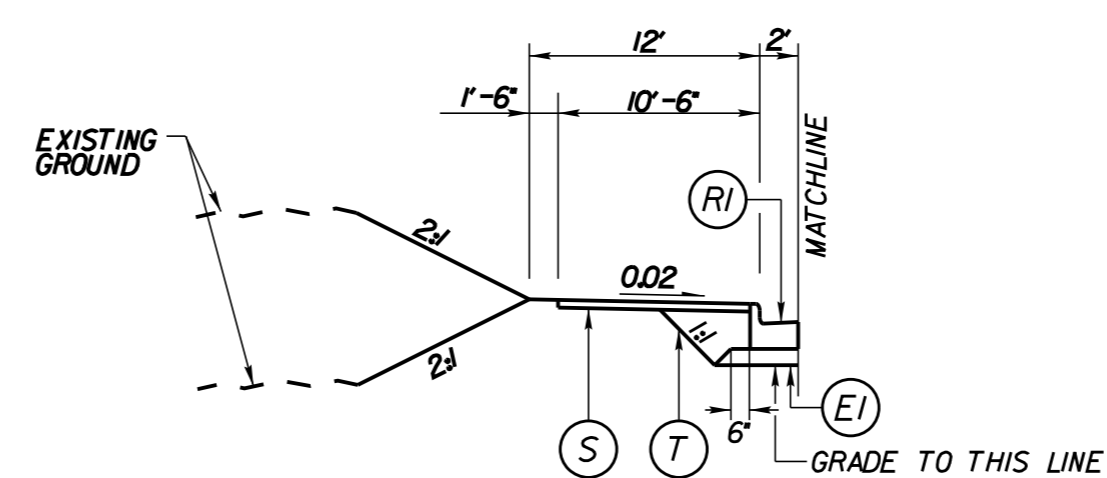

**TYPICAL SECTION NO. 9A**  
-Y2RPB- STA 10+00.00 TO STA 13+02.62 (LT)

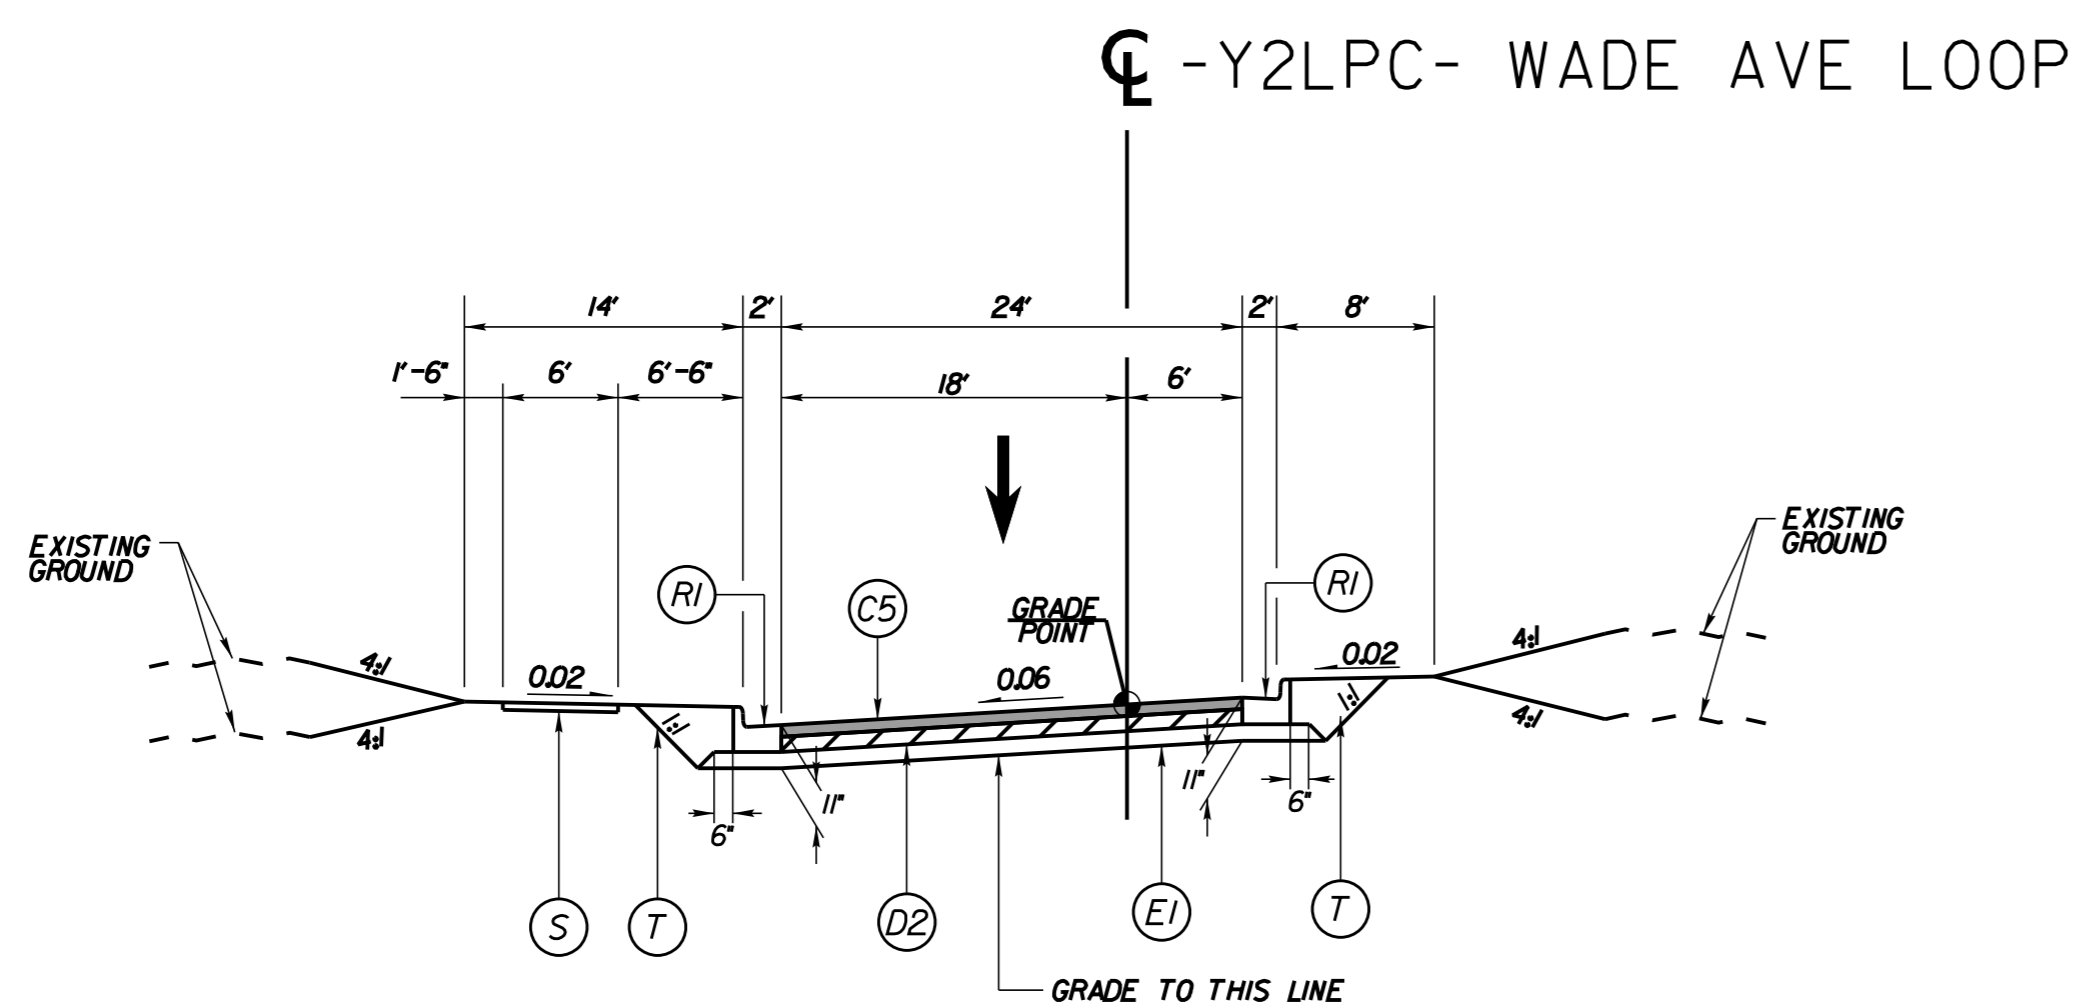

**TYPICAL SECTION NO. 10**  
-Y2LPC- STA 10+00.00 TO STA 13+10.98

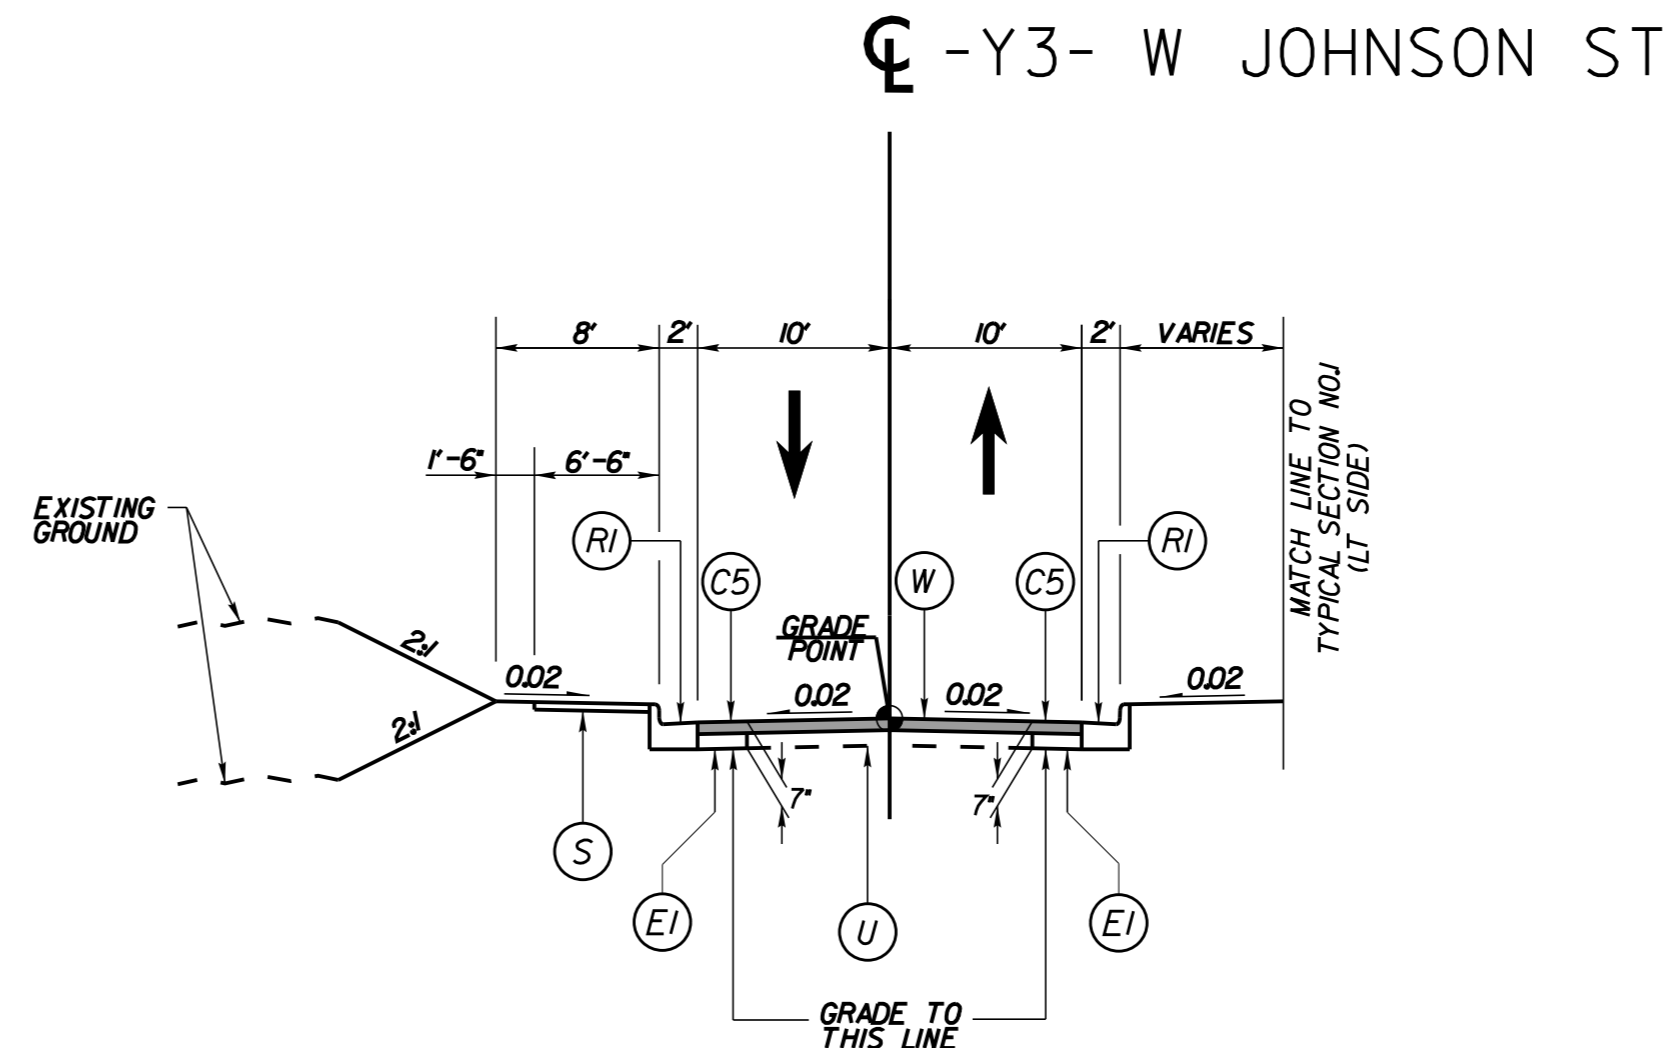

**TYPICAL SECTION NO. 11**  
-Y3- STA 10+03.00 TO STA 12+95.00

NOTE: MILL (INCIDENTAL) NOTCH TO KEY-IN 1.5" S9.5B AS APPLICABLE