


SIGN NO.	SIGN TYPE	SIGN SIZE (in.)		ROADWAY STATION	NO. OF SUP.	BEAM SECTION	SUPPORT TYPE	ATTACH METHOD	MOUNTING METHOD	HORIZ. CLR. (ft.)	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			FOOTING DIAMETER (ft.)	FOOTING DEPTH (ft.)	B/A SUPPORT WEIGHTS (lbs.)	SIMPLE SUPPORT WEIGHTS (lbs.)	REINF. FTGS. (c.y.)	PLAIN FTGS. (c.y.)	FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)
		w	x								h	SNS HT	HT	MTG HT	EMBED-MENT	S	L	TOTAL LENGTH	S	L	TOTAL LENGTH	S							
101	A	144	X78	12+40-L-	2	W6x12	BA	N/A	N/A	14.00	6.50	10.00	4.5	-1.16	15.34	19.84	0.00	0.00	0.00	-3.00	13.50	18.00	1.5	5	532.02	0.00	0.65	0.00	
102	A	186	X162	20+60-L-	2	W10x26	S	N/A	N/A	10.00	13.50	7.00	6.5	1.05	21.55	28.05	0.00	0.00	0.00	3.85	24.35	30.85	2.50	7	0.00	1531.37	2.55	0.00	
103	A	192	X48	25+60-L-	2	W6x12	S	N/A	N/A	18.00	4.00	7.00	4.5	0.02	11.02	15.52	0.00	0.00	0.00	4.42	15.42	19.92	1.50	5	0.00	425.29	0.65	0.00	
104	A	144	X54	39+00-L-	2	S4x7.7	BA	N/A	N/A	14.50	4.50	7.00	4.5	0.35	11.85	16.35	0.00	0.00	0.00	0.24	11.74	16.24	1.00	5	290.94	0.00	0.00	0.29	
201	A	72	X60	15+50-L-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	1.00	13.00	16.50	0.00	0.00	0.00	1.00	13.00	16.50	1.00	4	224.10	0.00	0.00	0.23	
202	A	72	X60	43+00	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	1.00	13.00	16.50	0.00	0.00	0.00	1.00	13.00	16.50	1.00	4	224.10	0.00	0.00	0.23	
203	A	72	X60	16+00-NBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	1.00	13.00	16.50	0.00	0.00	0.00	1.00	13.00	16.50	1.00	4	224.10	0.00	0.00	0.23	

TOTAL	1495.26	TOTAL	1956.66	TOTAL	3.85	TOTAL	0.99
USE:	1496	1957	4	1			

NOTES

- DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF PAVEMENT.
- FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

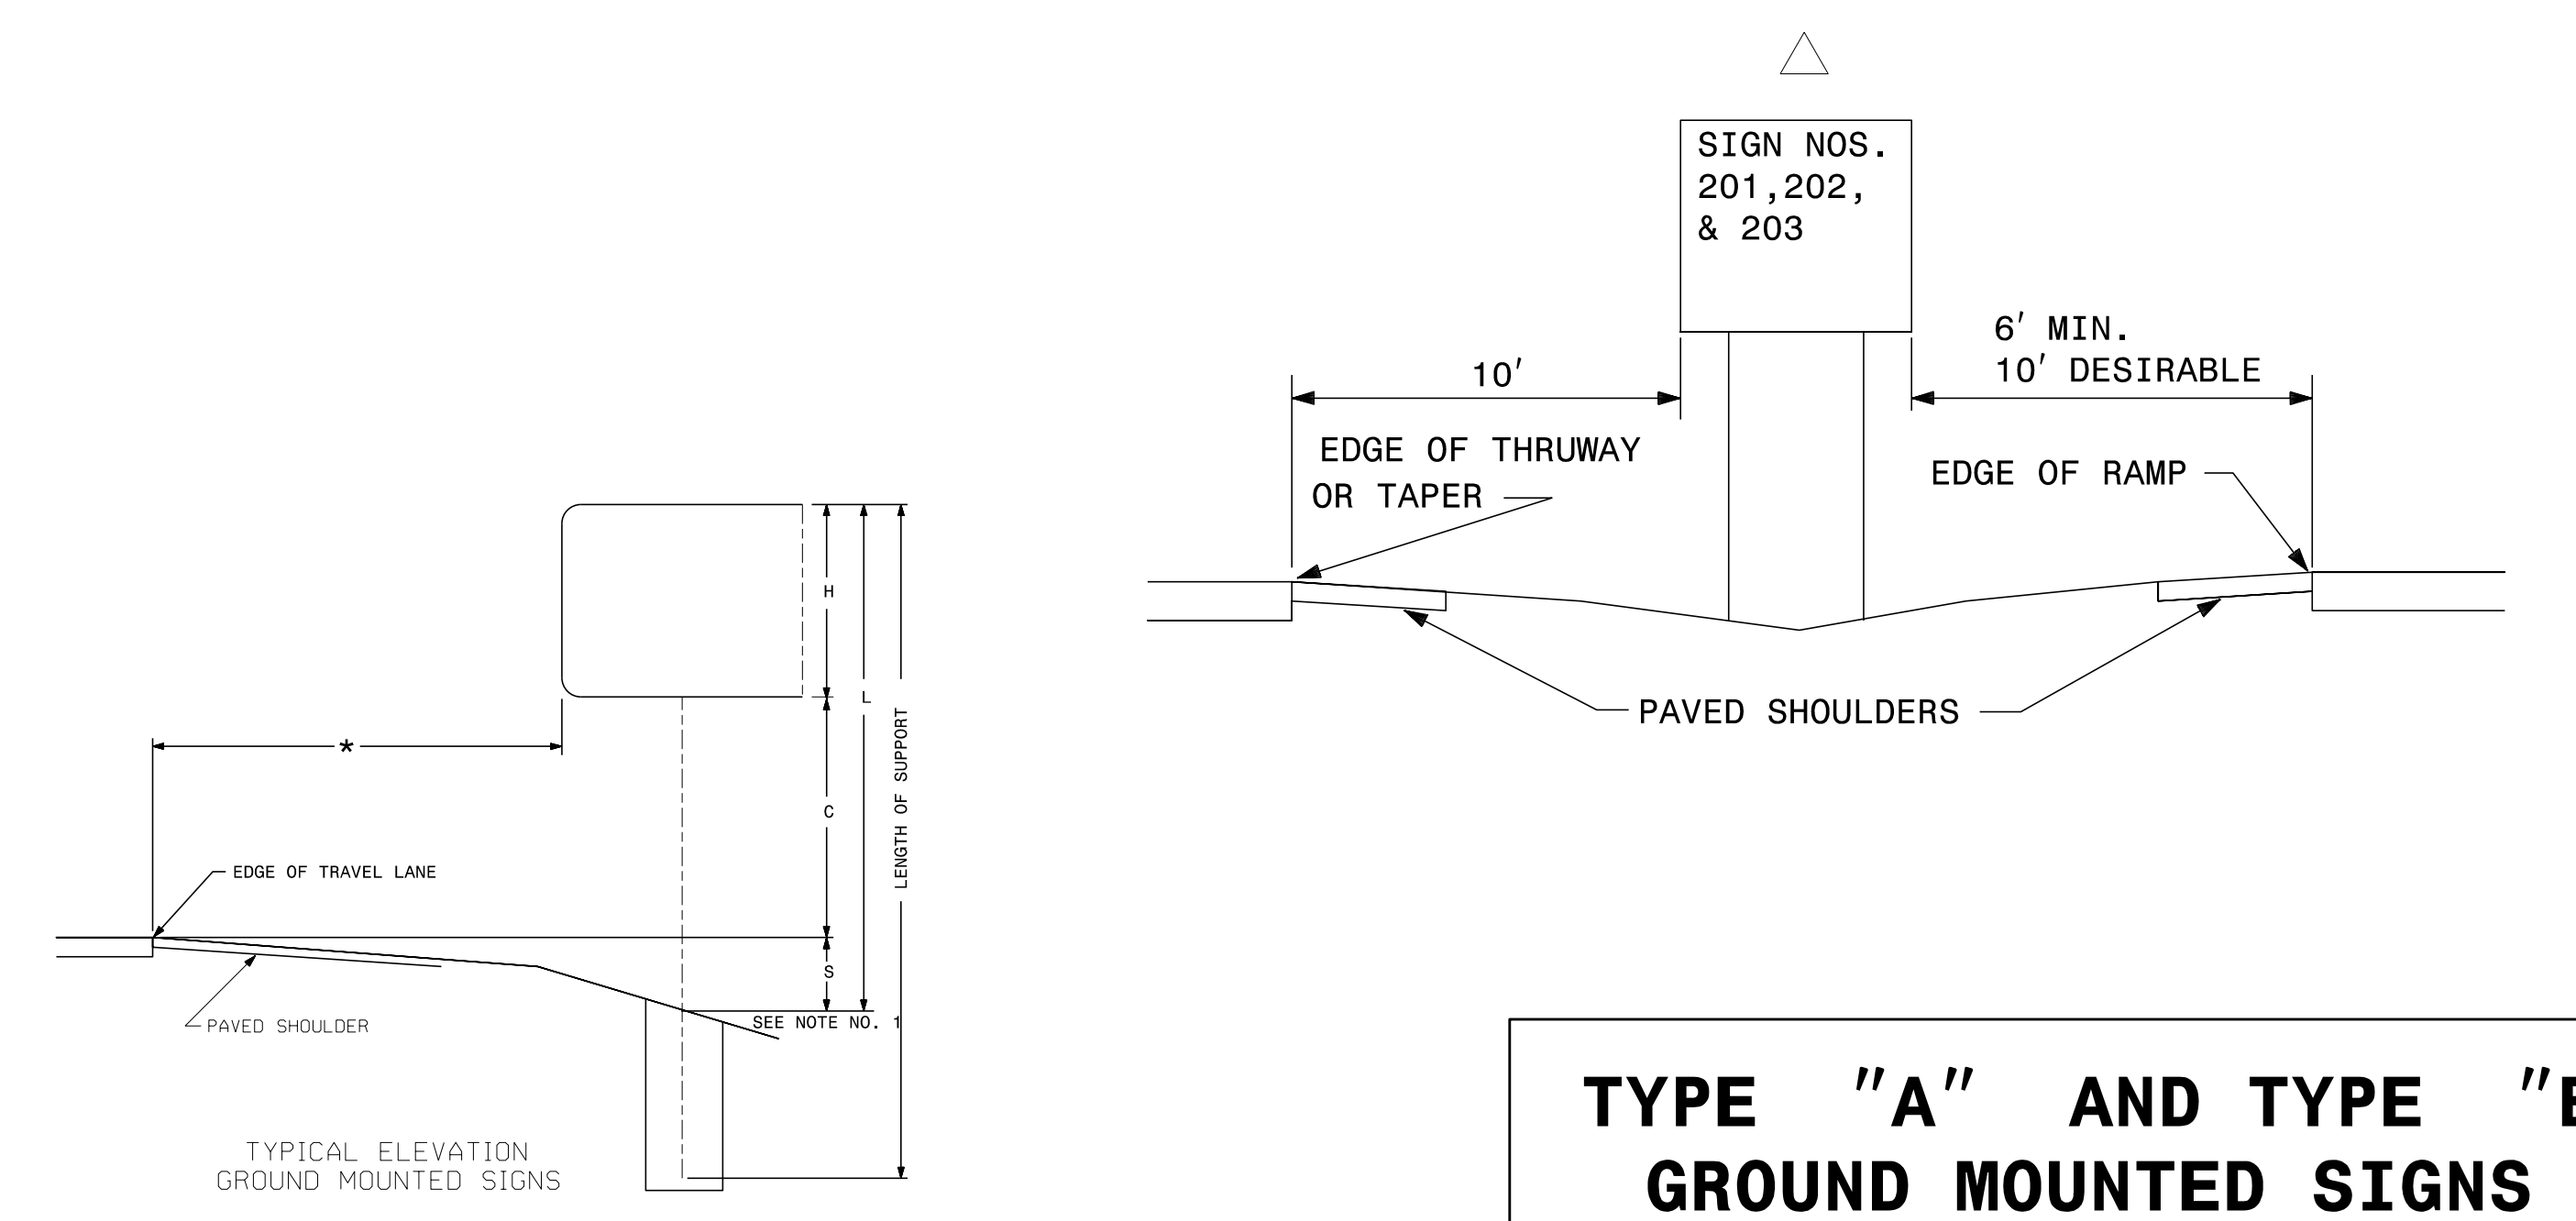

TYPE "A" AND TYPE "B" GROUND MOUNTED SIGNS

I:\28\2016 Projects\B-5121\Traffic\Signing\CADD\Signing Layout Plans\B-5121-B-5317_Sgn.1.dgn