




TYPICAL SECTION NO. 2
 TO BE USED ON MAPS: 4, 7, 8
 MAP 4: STA. 10+00 TO STA. 17+37
 MAP 7: STA. 16+27 TO STA. 17+87
 MAP 8: STA. 10+64 TO STA. 20+64

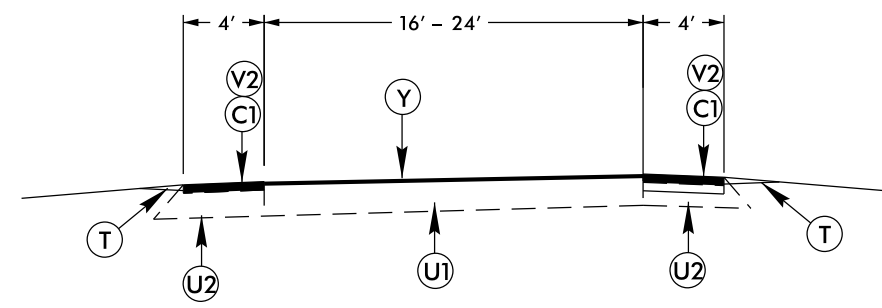

TYPICAL SECTION NO. 5
 TO BE USED ON MAPS 5, 7, 11
 MAP 5: STA. 9+70 TO STA. 18+34
 MAP 7: STA. 10+00 TO STA. 16+27
 MAP 11: STA. 10+00 TO STA. 17+18

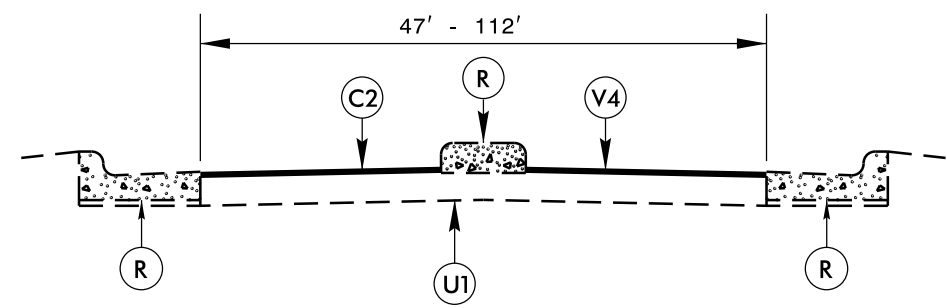


TYPICAL SECTION NO. 3
 TO BE USED ON MAPS 4, 7
 MAP 4: STA. 17+37 TO STA. 17+57
 MAP 7: STA. 17+87 TO STA. 18+37

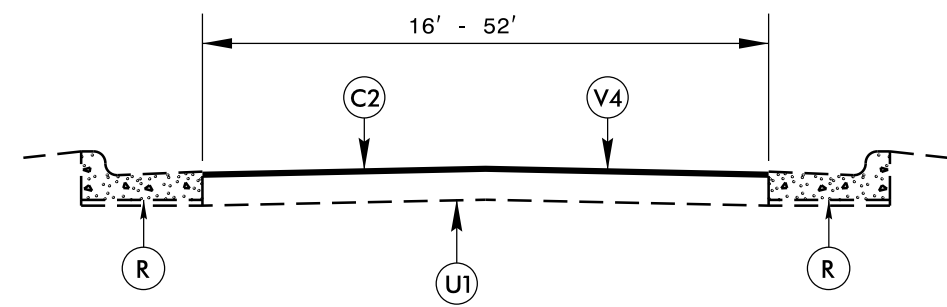

TYPICAL SECTION NO. 4
 TO BE USED ON MAPS 5, 8
 MAP 5: STA. 9+18 TO STA. 9+70
 MAP 8: STA. 10+00 TO STA. 10+64

**PATCHING DETAIL FOR SHOULDER DRAIN
 (Pavement Repair)**

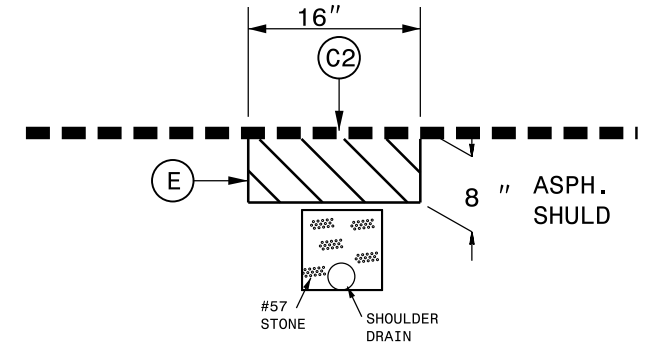

REMOVE EXISTING ASPHALT PAVEMENT 8" IN DEPTH AND FILL WITH 6 1/2" BASE COURSE TYPE B25.0B IN ONE LIFT AND 1 1/2" SURFACE COURSE, TYPE S9.5C AT LOCATIONS AS DIRECTED BY THE ENGINEER.

TO BE USED IN CONJUNCTION WITH MAPS 1 AND 2
 (SEE SHOULDER DRAIN SHEET)

APPROXIMATE LOCATIONS
 MAP 1: STA. 55+50 TO STA. 70+14
 MAP 1: STA. 114+76
 MAP 2: STA. 136+15
 MAP 2: STA. 187+11 TO STA. 200+76

PAVEMENT SCHEDULE			
A	8" ROLLED COMPACTED CONCRETE (RCC).		
C1	PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. IN TWO LIFTS		
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
E	PROP. APPROX. 6 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 741 LBS. PER SQ. YD. IN ONE LIFT		
F	PROPOSED FOG SEAL TO BE APPLIED TO THE EXISTING ASPHALT SHOULDER		
R	EXISTING CONCRETE STRUCTURE		
T	SHOULDER RECONSTRUCTION		
U1	EXISTING TRAVELWAY	U2	EXISTING PAVED SHOULDER.
V1	8 1/4" TRENCHING	V2	4" TRENCHING
V3	MILLED RUMBLE STRIP	V4	1 1/2" MILLING
Y	PROPOSED DIAMOND GRINDING		

REVISIONS

Revised 7/16/2016: Changed median shoulders from PCCP to Asphalt.
 08-Jul-2015 11:28 15821 15789 Guilford
 sjects\Division AT C:\p\15821 15789 Guilford
 P:\p\15821 15789 Guilford