
TYPICAL 10

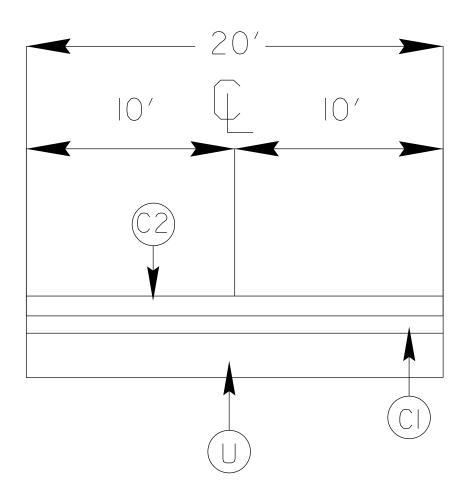

SURFACING SCHEDULE

SURFACING SCHEDULE			
ITEM NO	DESCRIPTION		
C1	PROP. ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A (LEVELING)		
C2	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ YD		
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD		
C4	PROP. ASPHALT CONCRETE SURFACE COURCE, TYPE S9.5B (LEVELING)		
C5	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ YD		
C6	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 220 LBS. PER SQ YD		
D1	PROP. VAR DEPTH ASPHALT CONCRETE INTERMEDIATE COURCE WEDGING TYPE I19.0B, SQ.YARD. AT LOCATIONS AS DIRECTRED BY PROJECT ENGINEER		
D2	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE,TYPE I19.OB (LEVELING)		
Т	SHOULDER RECONSTRUCTION		
U	EXISTING ASPHALT		
V1	MILLED ASPHALT PAVEMENT 1 1/2" IN DEPTH IN LOCATIONS AS DIRECTED BY PROJECT ENGINEER		
V2	MILLED ASPHALT PAVEMENT 2" IN DEPTH IN LOCATIONS AS DIRECTED BY PROJECT ENGINEER		
Х	PAVEMENT INTERLAYER-SEE PROJECT SPECIAL PROVISIONS		

PROJECT REFERENCE NO.		SHEET NO.
2017CPT.14.02	41	
STATE PROJECT	F.A. PROJECT NO	. DESCRIPTION
2017CPT.14.02.20451.		
	The state of the s	