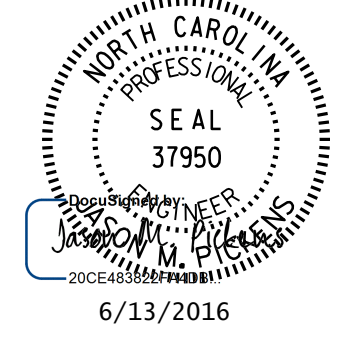
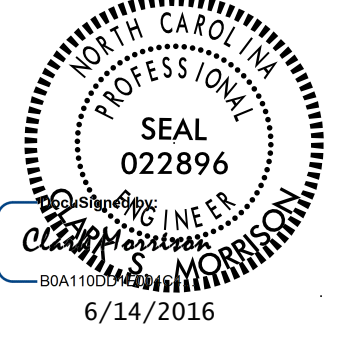


FINAL PAVEMENT SCHEDULE






CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	DESCRIPTION
** C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E1*	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	T*	EARTH MATERIAL
C2*	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R1	EXISTING 2'-6" CONCRETE CURB AND GUTTER	U	EXISTING PAVEMENT.
** C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1½" IN DEPTH OR GREATER THAN 2" IN DEPTH.	R4*	1'-6" CONCRETE CURB AND GUTTER	** V1	FINE MILLING ASPHALT PAVEMENT, 0" - 1½"
** D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	R5*	5" MONOLITHIC CONCRETE ISLAND (KEYED IN)	** V2	MILLING ASPHALT PAVEMENT, 2½" DEPTH
* D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	R6*	2'-6" CONCRETE CURB AND GUTTER (USE AS NOTED ON PLANS)	** W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL ON THIS SHEET).
** D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	S*	4" CONCRETE SIDEWALK		

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

PLANS PREPARED BY:
PARSONS
RALEIGH, NORTH CAROLINA, (919) 854-1345
NC LICENSE NO. F-0246
FOR NORTH CAROLINA DEPT. OF TRANSPORTATION


PROJECT REFERENCE NO. W-5203AA	SHEET NO. 2A-1
RW SHEET NO.	PAVEMENT DESIGN ENGINEER
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

* WORK TO BE PERFORMED UNDER W-5203AA
** MILLING AND RESURFACING TO BE PERFORMED UNDER PROJECT 2017CPT.03.01.10651

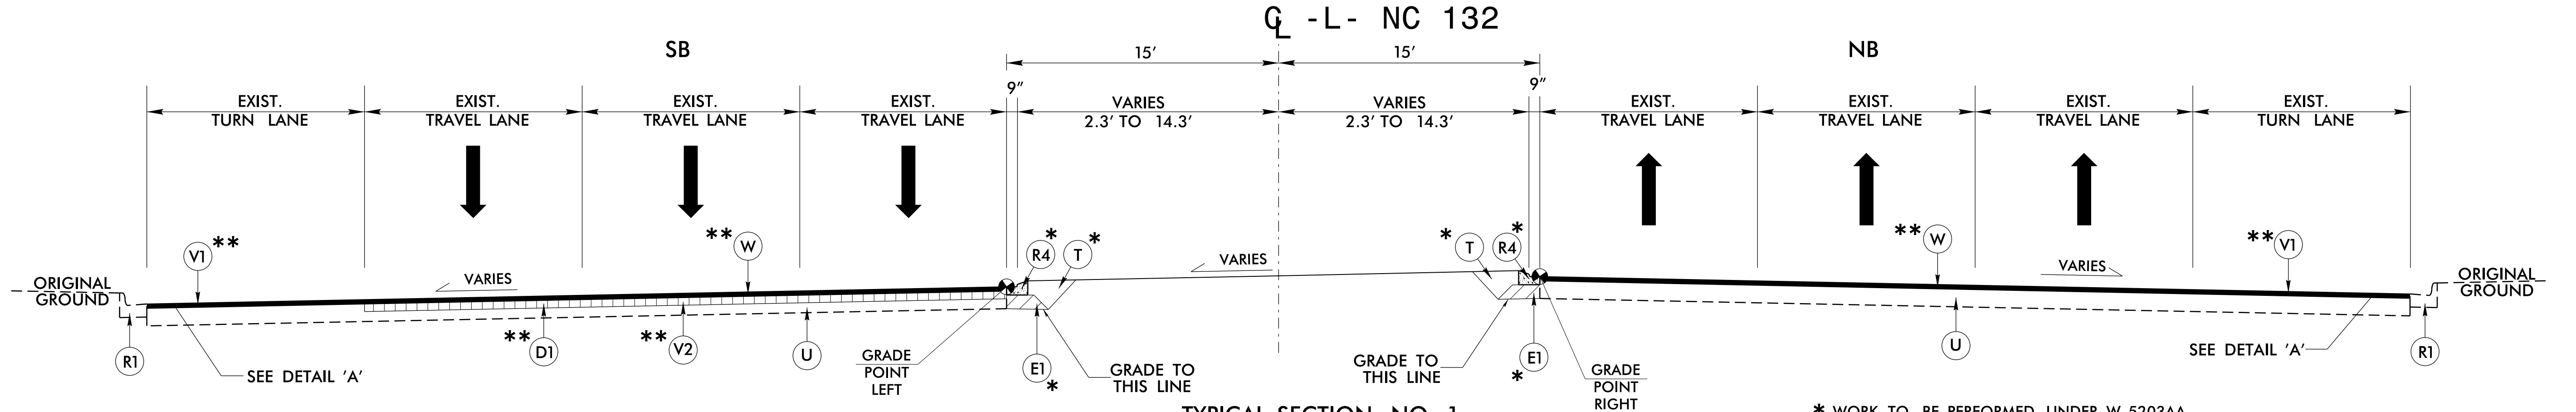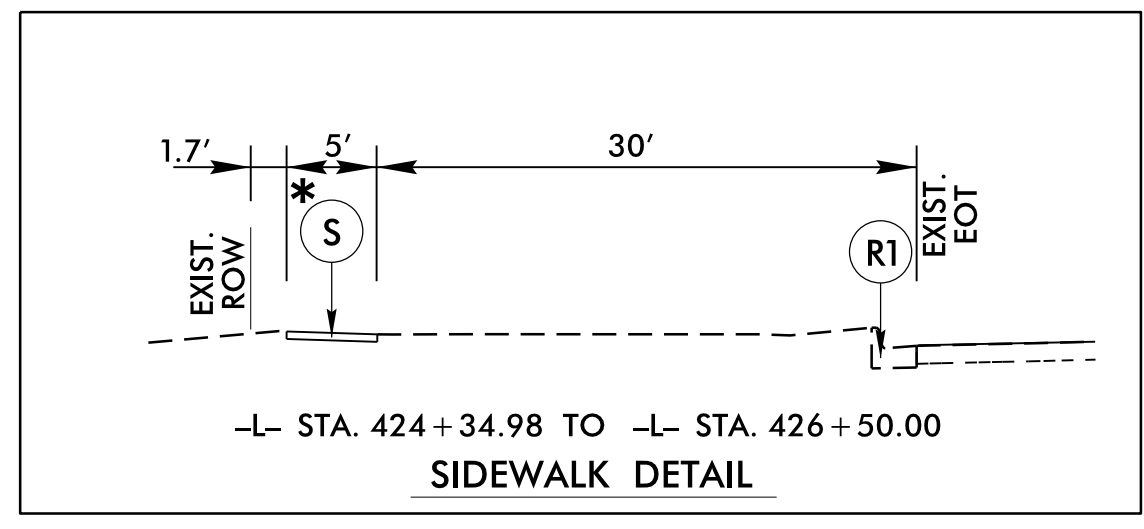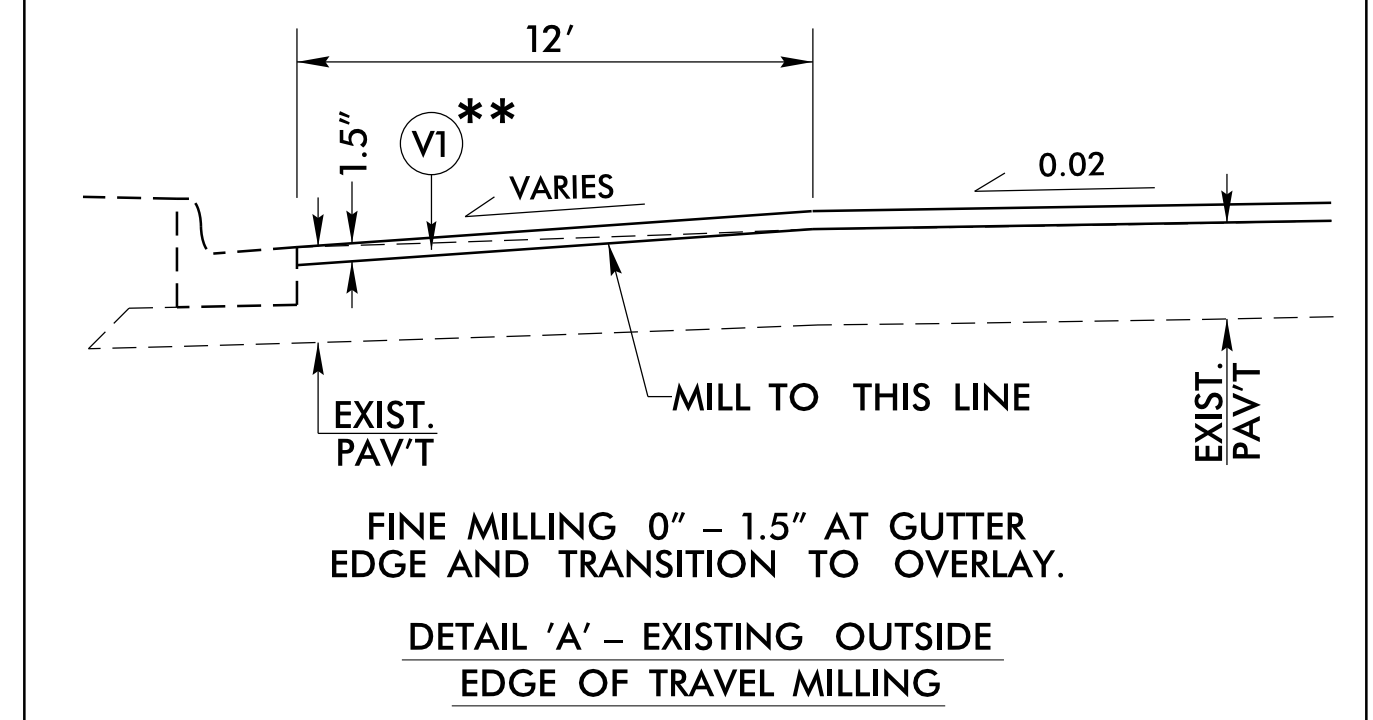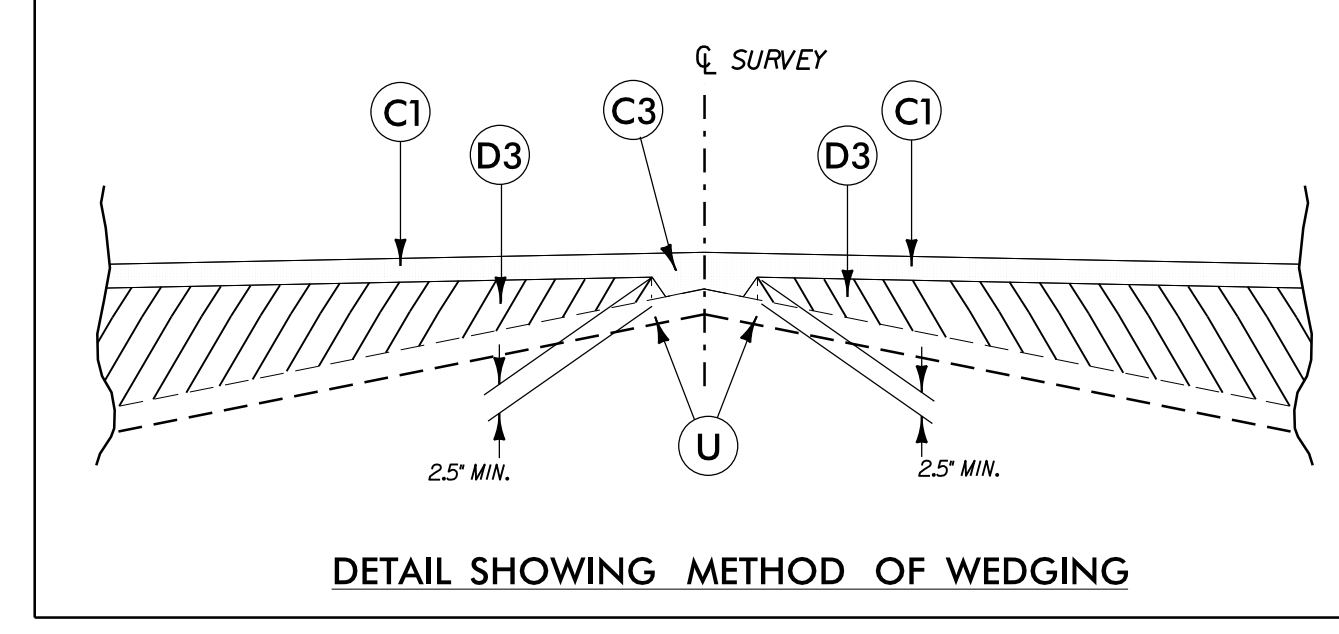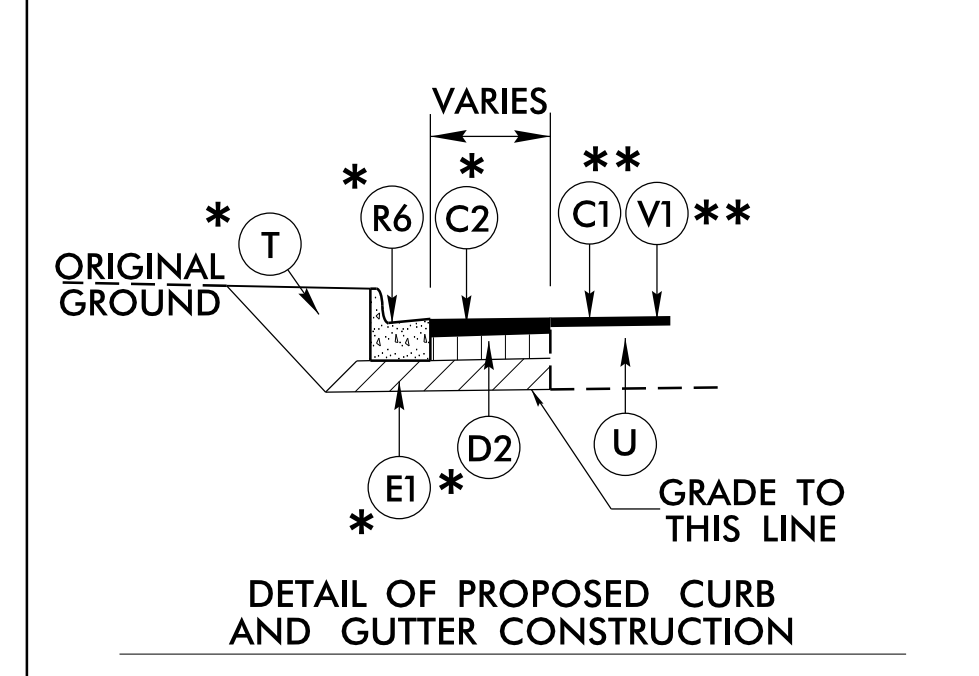

* WORK TO BE PERFORMED UNDER W-5203AA
** MILLING AND RESURFACING TO BE PERFORMED UNDER PROJECT 2017CPT.03.01.10651

STA. 417+50.00 -L- TO STA. 424+27.43 -L-
STA. 430+26.43 -L- TO STA. 435+50.00 -L-
NOTE: RESURFACE FROM STA. 416+00.00 -L- TO STA. 417+50.00 -L-
RESURFACE FROM STA. 435+50.00 -L- TO STA. 437+10.00 -L-

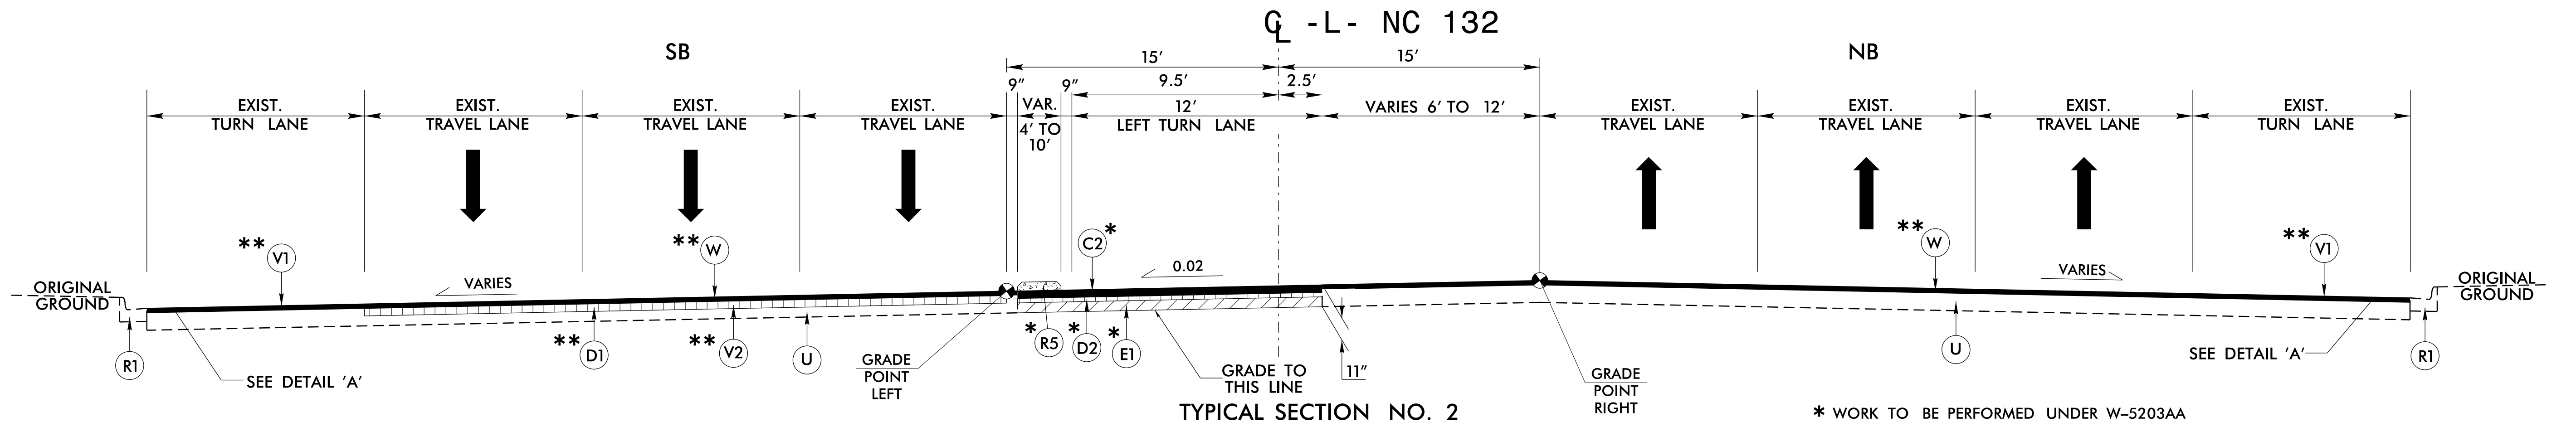

* WORK TO BE PERFORMED UNDER W-5203AA
** MILLING AND RESURFACING TO BE PERFORMED UNDER PROJECT 2017CPT.03.01.10651

STA. 424+27.43 -L- TO STA. 426+49.43 -L-
STA. 427+58.08 -L- TO STA. 430+26.43 -L-

I:\UN-2016\0906\J:\W-5203AA\Roadway\Proj\W-5203AA_RDY_TYP_2A-1.dgn
\$\$\$\$\$1515151515\$\$\$\$\$