


TYPICAL SECTION NO. 2


TO BE USED ON MAPS 2, 7, 9, 11
 MAP 2: STA. 10+00 TO STA. 22+10
 STA. 22+35 TO STA. 22+91
 MAP 7: STA. 34+54 TO STA. 35+59
 MAP 7: STA. 111+33 TO STA. 123+51
 MAP 9: STA. 10+00 TO STA. 19+45
 MAP 11: STA. 10+00 TO STA. 20+68

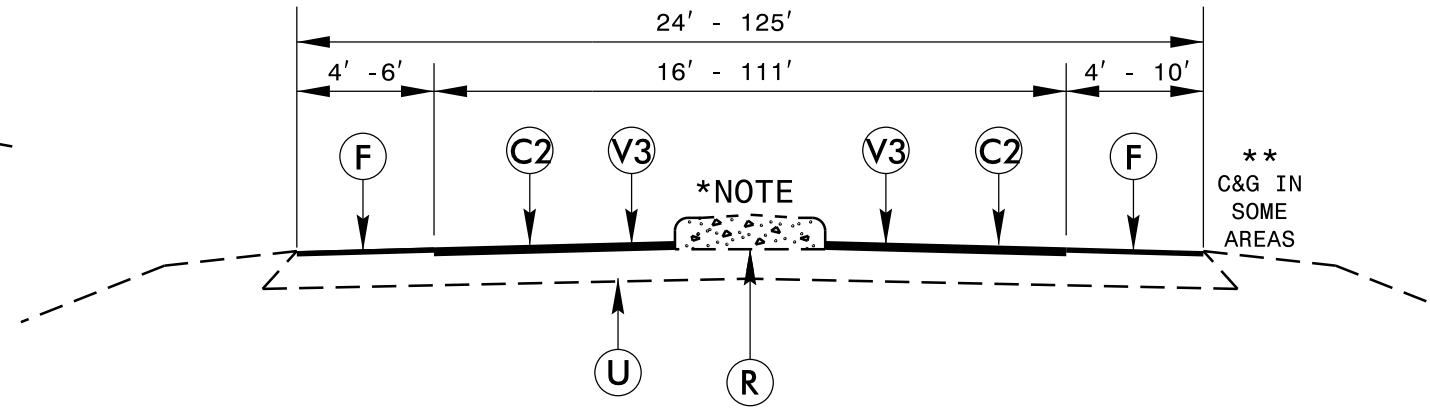

* NOTE: TRAFFIC ISLAND AT END OF RAMP (MAP 4)

TYPICAL SECTION NO. 4

TO BE USED ON MAPS 4, 6, 7
 MAP 4: STA. 10+00 TO STA. 14+76
 ** STA. 14+76 TO STA. 18+08 C&G RT
 STA. 18+08 TO STA. 19+81
 **MAP 6: STA. 10+00 TO STA. 10+35 C&G RT
 STA. 10+35 TO STA. 21+05
 MAP 7: STA. 173+14 TO STA. 176+80

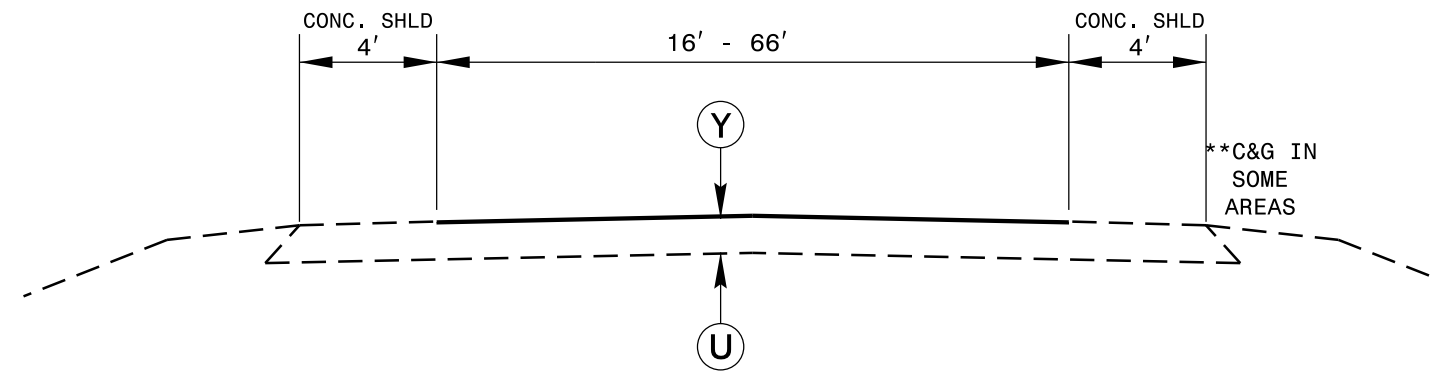

TYPICAL SECTION NO. 3

TO BE USED ON MAPS 2, 3, 7, 8, 10, 12
 MAP 2: STA. 22+10 TO STA. 22+35
 STA. 22+91 TO STA. 37+07
 MAP 3: STA. 10+00 TO STA. 37+31
 STA. 38+94 TO STA. 48+19
 MAP 7: STA. 10+00 TO STA. 15+22
 STA. 17+17 TO STA. 34+54
 ** STA. 35+59 TO STA. 56+20 C&G
 STA. 57+36 TO STA. 81+54
 STA. 84+71 TO STA. 111+33
 STA. 123+51 TO STA. 124+96
 STA. 130+86 TO STA. 173+14
 MAP 8: STA. 10+00 TO STA. 26+70
 MAP 10: STA. 10+00 TO STA. 43+95
 MAP 12: STA. 10+00 TO STA. 10+20
 STA. 13+33 TO STA. 17+10

PAVEMENT SCHEDULE

C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVG. RATE OF 168 LBS PER SQ. YD. IN EACH OF TWO LAYERS
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, S9.5C AT AN AVG. RATE OF 168 LBS PER SQ. YD.
D	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, I19.0C AT AN AVG RATE OF 456 LBS PER SQ. YD. IN ONE LIFT
F	PROPOSED FOG SEAL TO BE APPLIED TO THE EXISTING ASPHALT SHOULDER
R	EXISTING CONCRETE STRUCTURE
U	EXISTING PAVEMENT
V1	3" MILLING FOR PATCHING
V2	MILLED RUMBLE STRIP
V3	MILLING ASPHALT PAVEMENT 1½" DEPTH
V4	4" MILLING FOR PATCHING
Y	PROPOSED DIAMOND GRINDING