

6/2/99



# FINAL PAVEMENT SCHEDULE


CODE	DESCRIPTION
A1	PROP. APPROX. 10.5" PORTLAND CEMENT JOINTED CONCRETE PAVEMENT WITH DOWELS.
A2	PROP. APPROX. 10.5" PORTLAND CEMENT JOINTED CONCRETE PAVEMENT WITHOUT DOWELS.
A3	PROP. APPROX. 3.5" PORTLAND CEMENT JOINTED CONCRETE PAVEMENT WITHOUT DOWELS.
C1	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YARD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD.
C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LAYERS.
C4	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" IN DEPTH OR GREATER THAN 2" IN DEPTH.
C5	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD.
C6	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LAYERS.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.

CODE	DESCRIPTION
D3	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.
E2	PROP. APPROX. 4.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 484.5 LBS. PER SQ. YARD.
E3	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	PROP. 8" AGGREGATE BASE COURSE.
J2	PROP. 6" AGGREGATE BASE COURSE.
K	SUBGRADE TO BE TREATED WITH LIME TO A DEPTH OF 8", AT A RATE OF 20 LBS. PER SQ. YD. AS DIRECTED BY THE ENGINEER. OR SUBGRADE TO BE TREATED WITH CEMENT TO A DEPTH OF 7", AT A RATE OF 55 LBS. PER SQ. YD. AS DIRECTED BY THE ENGINEER.
P	PRIME COAT AT THE RATE OF 0.35 GAL. PER SQUARE YARD
N	GEOTEXTILE FOR PAVEMENT STABILIZATION



CODE	DESCRIPTION
R1	2'-6" CONCRETE CURB AND GUTTER.
R2	5" MONOLITHIC CONCRETE ISLAND (SURFACE MOUNTED)
R3	4' EXPRESSWAY GUTTER
S	4" CONCRETE SIDEWALK.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	MILLED RUMBLE STRIPS
V1	MILLING 0" TO 3"
W	VARIABLE DEPTH ASPHALT PAVEMENT
X	3" PERMEABLE ASPHALT DRAINAGE COURSE - TYPE P-57

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

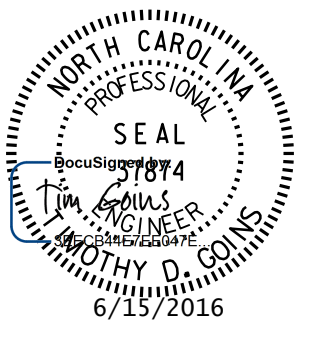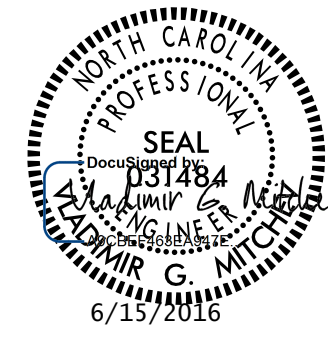
PROJECT REFERENCE NO. <b>U-2524D</b>	SHEET NO. <b>2A-1</b>
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER 
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	
PLANS PREPARED BY: <b>PARSONS</b> RALEIGH, NORTH CAROLINA, (919) 854-1345 NC LICENSE NO. F-0246 FOR NORTH CAROLINA DEPT. OF TRANSPORTATION	

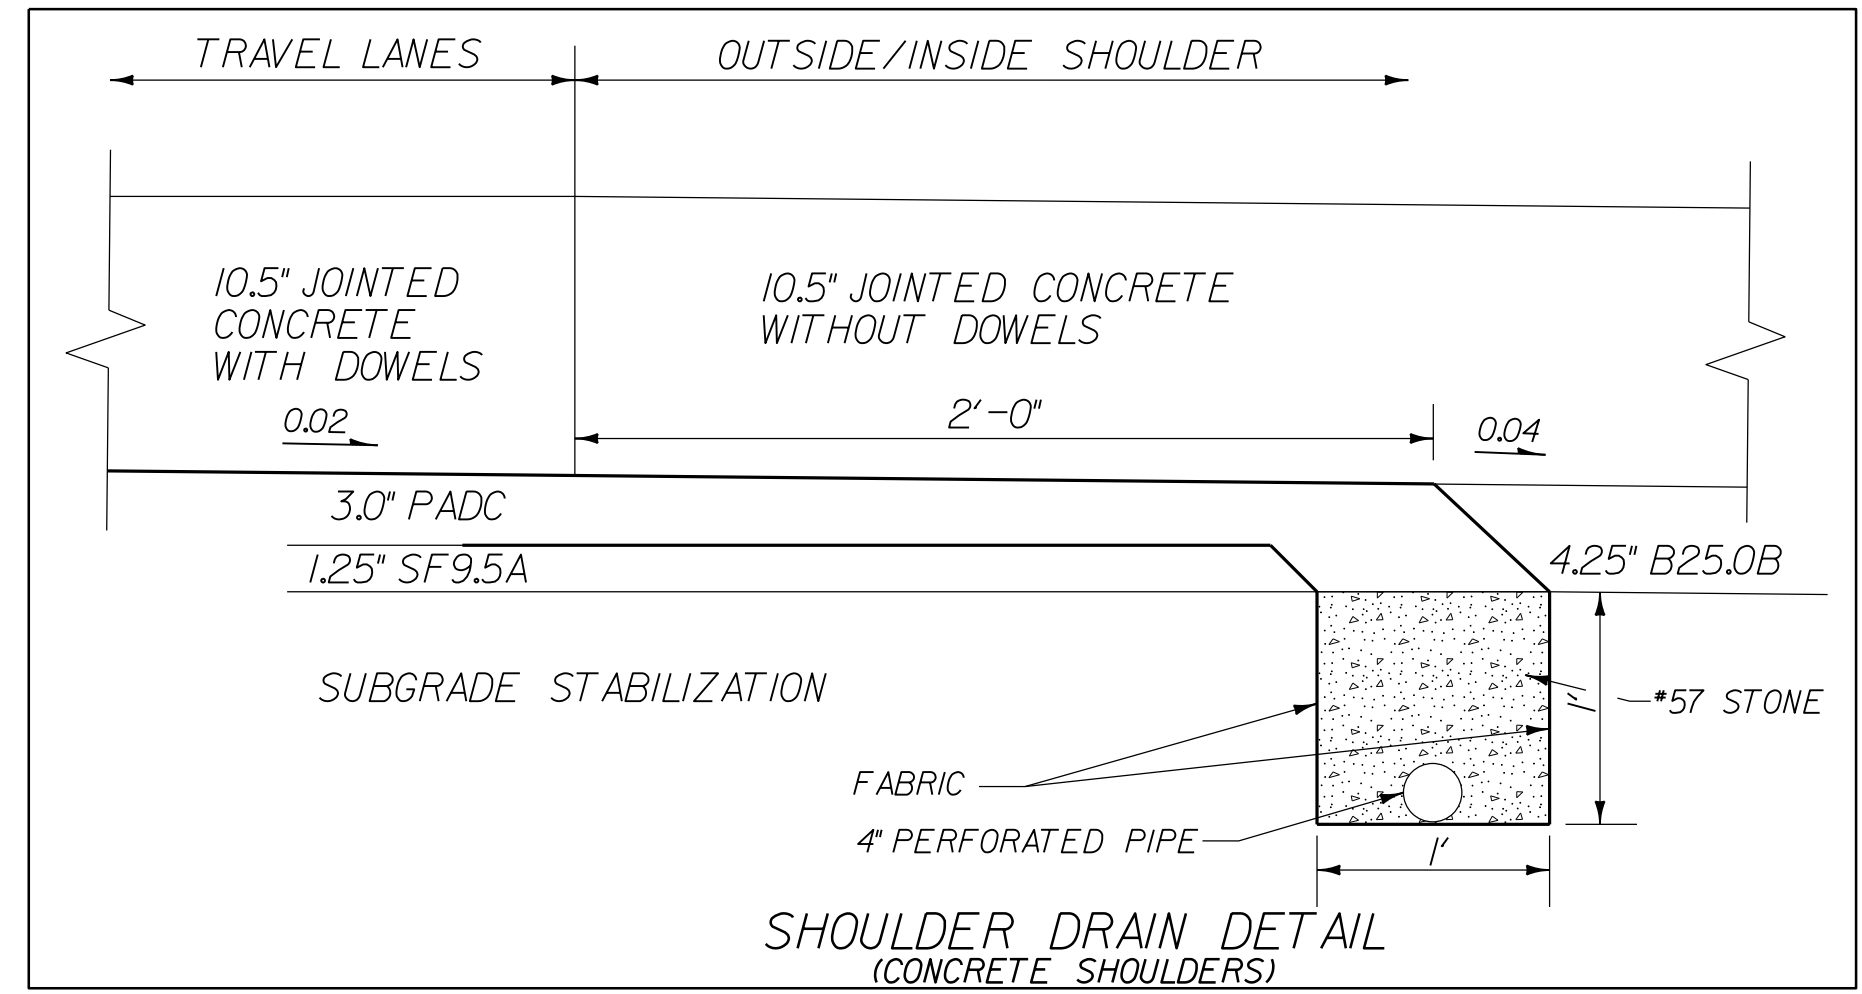

LINE	STATION TO STATION	LOCATION		OUTLET LOCATIONS										
		LANE	SHLD	422+25.00	425+25.00	428+25.00	431+25.00	434+25.00	437+00.00 (2GI)	440+00.00				
-L-	422+25.00 To 444+00.00	EBL	OUTSIDE	422+25.00	425+25.00	428+25.00	431+25.00	434+25.00	437+00.00 (2GI)	440+00.00				
-L/-LREV-	462+00.00 To 493+75.00	EBL	OUTSIDE	467+00.00 (2GI)	470+00.00	473+25.00	476+50.00 (2GI)	480+50.00 (2GI)	483+75.00	486+00.00				
-LREV/-L-	496+75.00 To 517+93.00	EBL	OUTSIDE	499+30.00 (2GI)	502+75.00	506+00.00	509+25.00 (2GI)	511+50.00 (2GI)	515+50.00 (2GI)					
-L-	444+00.00 To 467+00.00	EBL	MEDIAN	444+00.00 (2GI)	448+40.00 (2GI)	451+50.00 (2GI)	456+50.00	461+50.00 (2GI)	467+00.00 (2GI)					
-L/-LREV-	431+00.00 To 490+60.00	WBL	OUTSIDE	431+00.00	434+00.00	437+00.00 (2GI)	441+50.00 (2GI)	444+00.00 (2GI)	446+10.00 (2GI)	448+40.00 (2GI)				
				451+50.00 (2GI)	456+50.00	460+00.00	463+50.00	467+00.00 (2GI)	470+00.00	472+50.00 (2GI)				
				476+50.00 (2GI)	479+50.00 (2GI)	483+75.00 (2GI)	487+00.00							
-LREV/-L-	502+15.00 To 517+93.00	WBL	OUTSIDE	502+15.00	505+50.00	509+25.00 (2GI)	512+25.00	515+50.00 (2GI)						
-L-	422+25.00 To 431+00.00	WBL	MEDIAN	422+25.00	427+00.00									
-LREV-	491+00.00 To 493+75.00	WBL	MEDIAN	491+00.00 (2GI)										
-LREV-	496+75.00 To 501+00.00	WBL	MEDIAN	499+30.00 (2GI)	501+00.00 (2GI)									

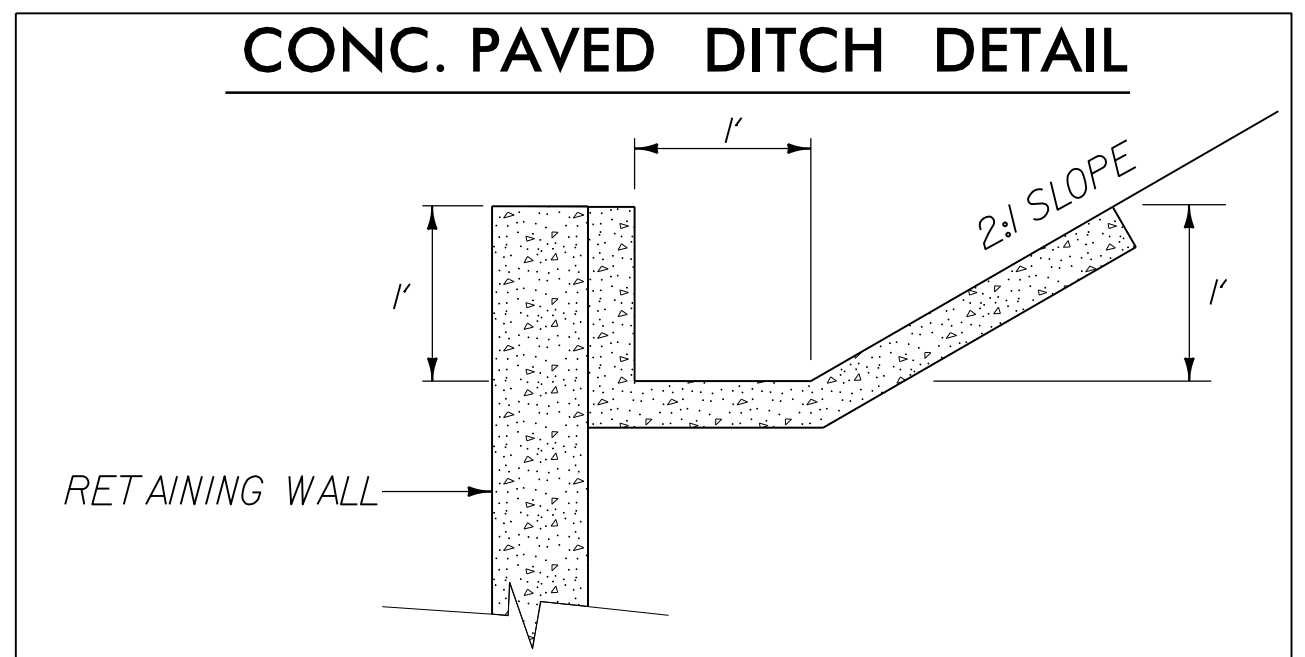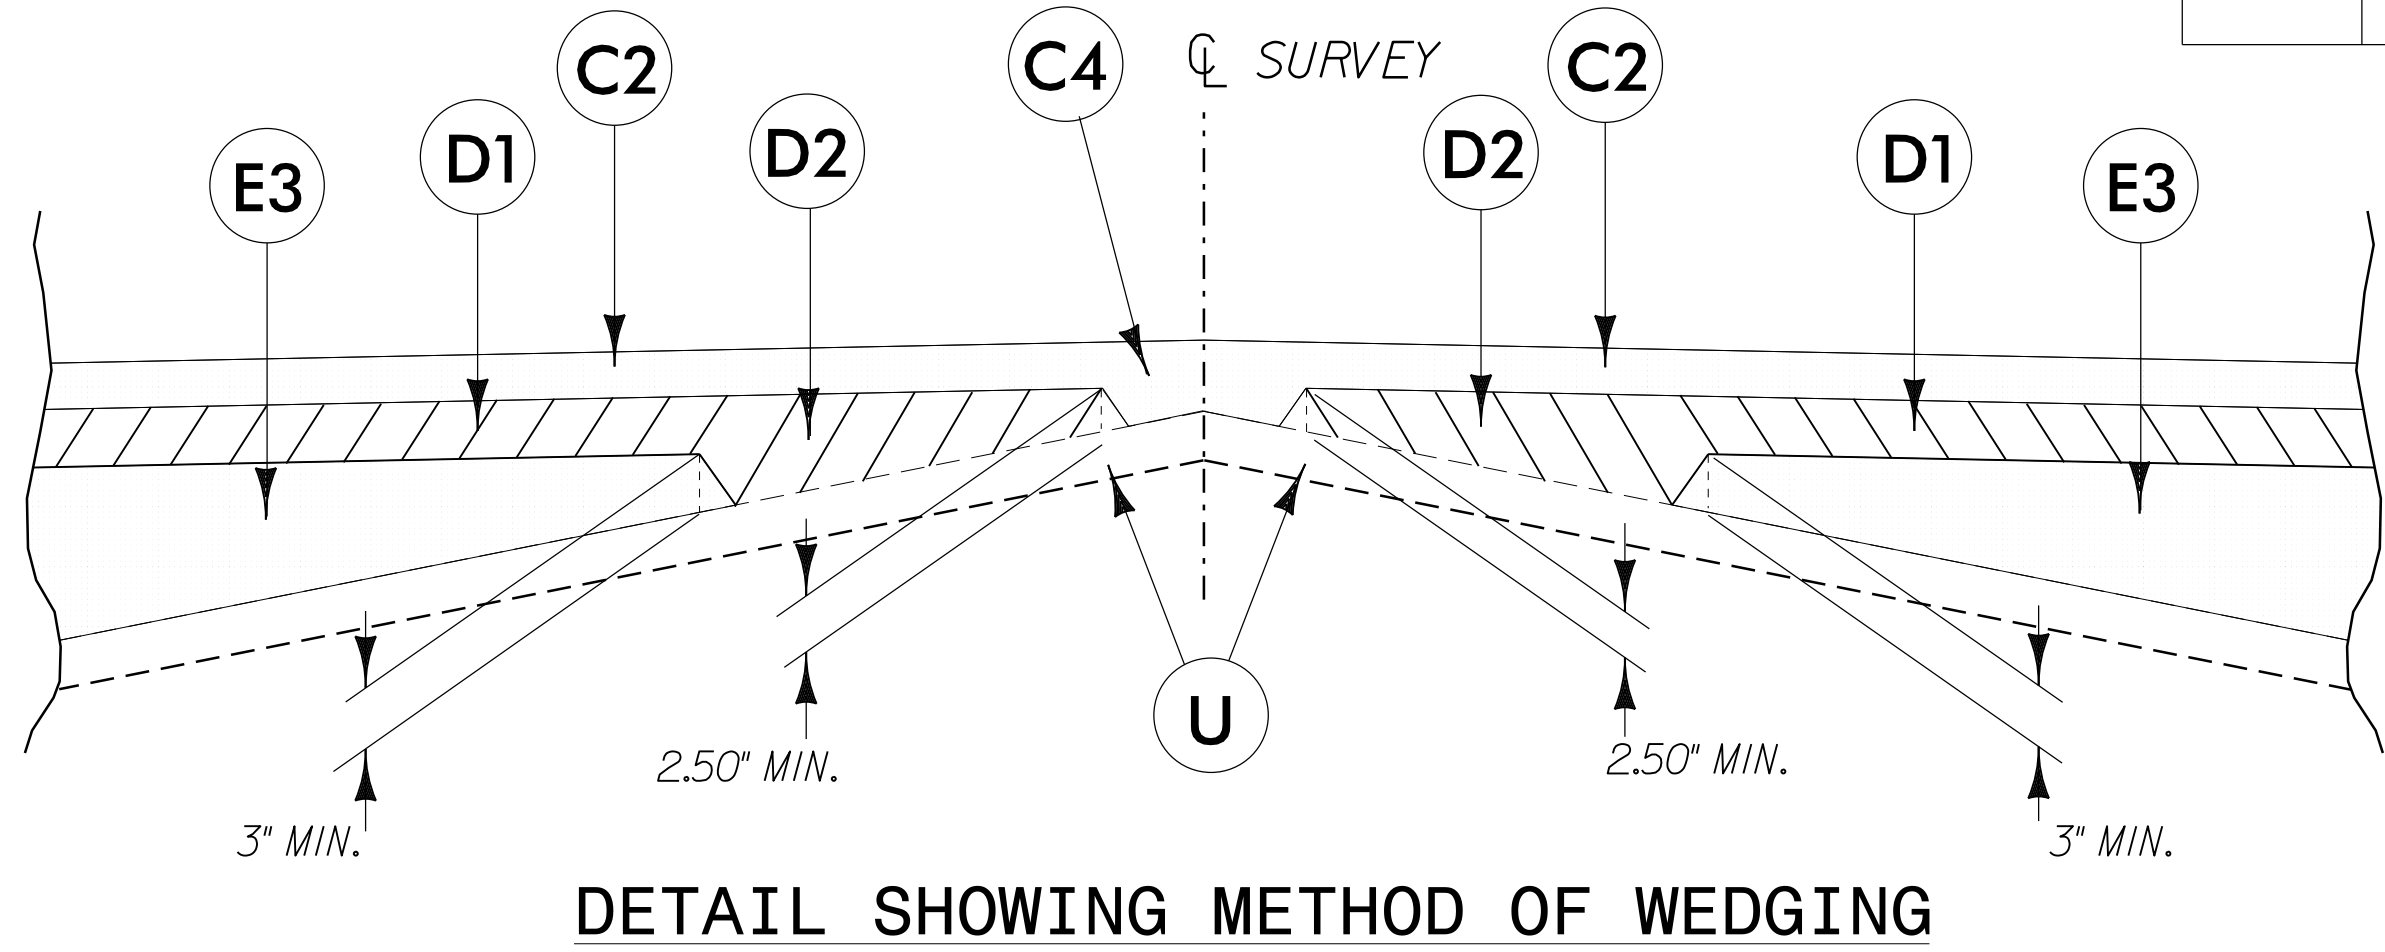

USE DETAIL 'A' IN CONJUNCTION WITH TYPICAL SECTION NO'S. 1A & 1C.

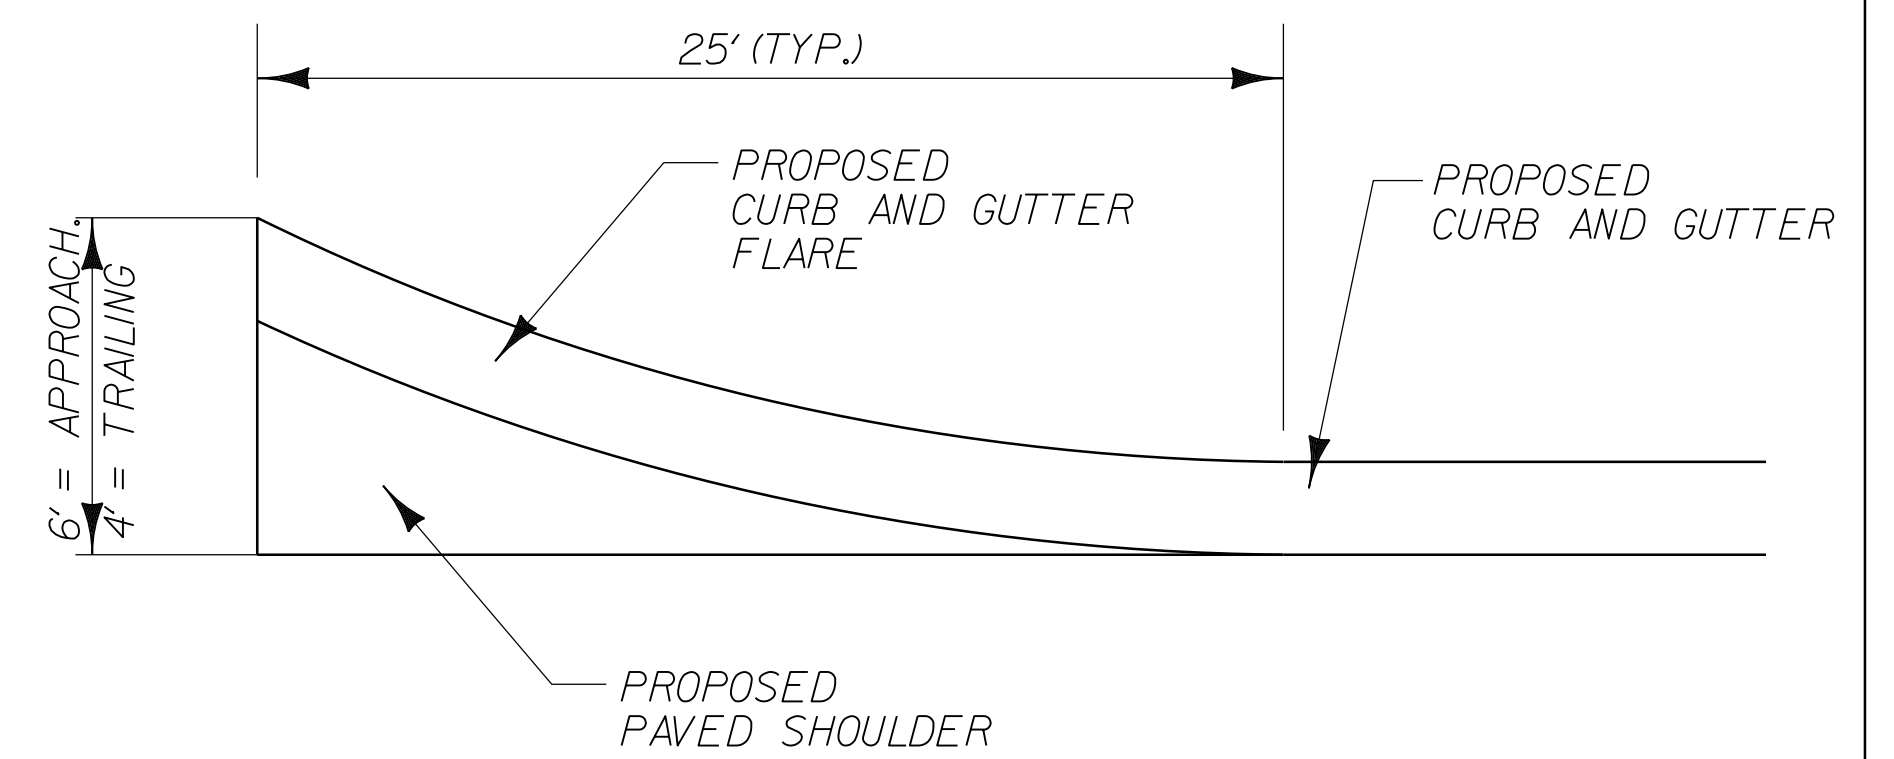

NOTE: DRAWING NOT TO SCALE

15-JUN-2016 16:34 \\s01\proj\2016\16234\proj\2524D\_RDV\_TYP\_02A-1.dgn \$\$\$\$USERNAME\$\$\$\$