

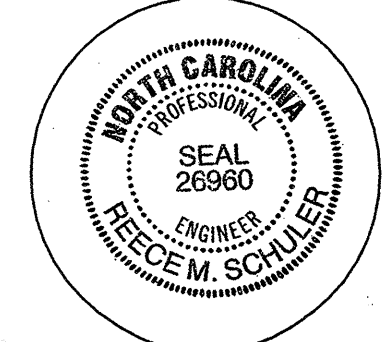
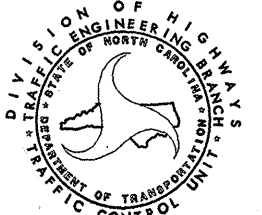
TEMPORARY PAVEMENT SCHEDULE

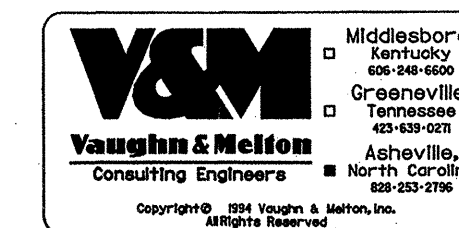
SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
		PAINT (4")	
PA	WHITE EDGELINE (2X)	4300 FT	
PI	YELLOW DOUBLE CENTER (2X)	3100 FT	7400 FT
		PAINT (24")	
P4	WHITE STOP BAR (2X)	80 FT	80 FT

FINAL PAVEMENT SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
		PAINT (4")	
PA	WHITE EDGELINE (2X)	4900 FT	
PI	YELLOW DOUBLE CENTERLINE (2X)	4600 FT	7600 FT
		MARKERS SNOWPLOWABLE PAVEMENT MARKERS	
MH	YELLOW & YELLOW	9 EA	9 EA

100% TCP SUBMITTAL

APPROVED: <i>[Signature]</i> DATE: 2/14/05		PAVEMENT SCHEDULE	
SEAL 	SCALE: NONE		
	DATE: MAR04		
	DWG. BY: SCS		
	DESIGN BY: RMS		
REVIEWED BY: JAC	REVISIONS		CADD FILE: B2848PM01.DGN



\$\$\$SYTIME\$\$\$\$\$
 \$\$\$DGN\$\$\$\$\$
 \$\$\$USERNAME\$\$\$\$\$