

5/14/99



NOTE:  
UTILIZE SPECIAL STILLING BASIN(S) AS  
STILLING BASIN WHERE APPLICABLE.

NOTE:  
UTILIZE TURBIDITY CURTAIN AS NEEDED.

PROJECT REFERENCE NO. B-4945	SHEET NO. EC-5/CONST.4
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

10

15



20

**BEGIN TIP PROJECT B-4945**  
-L- POC STA. 14+25.00

**BEGIN BRIDGE**  
-L- STA. 16+40.38  
**BEGIN APPROACH SLAB**  
-L- STA. 16+29.51

**END BRIDGE**  
-L- STA. 17+37.63  
**END APPROACH SLAB**  
-L- STA. 17+48.51

**END TIP PROJECT B-4945**  
-L- POT STA. 19+00.00

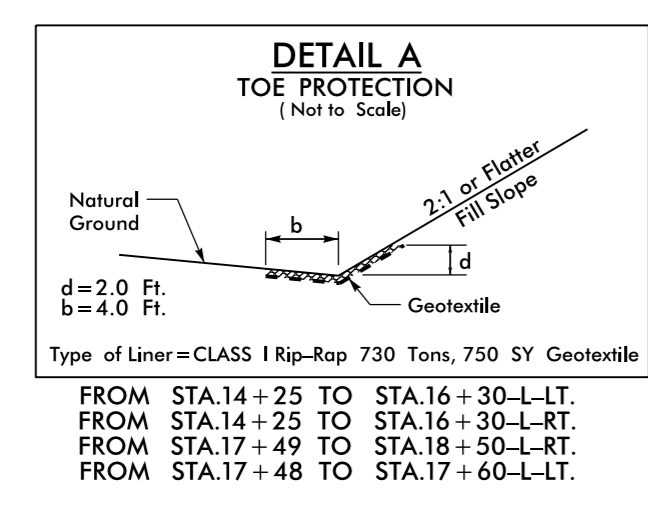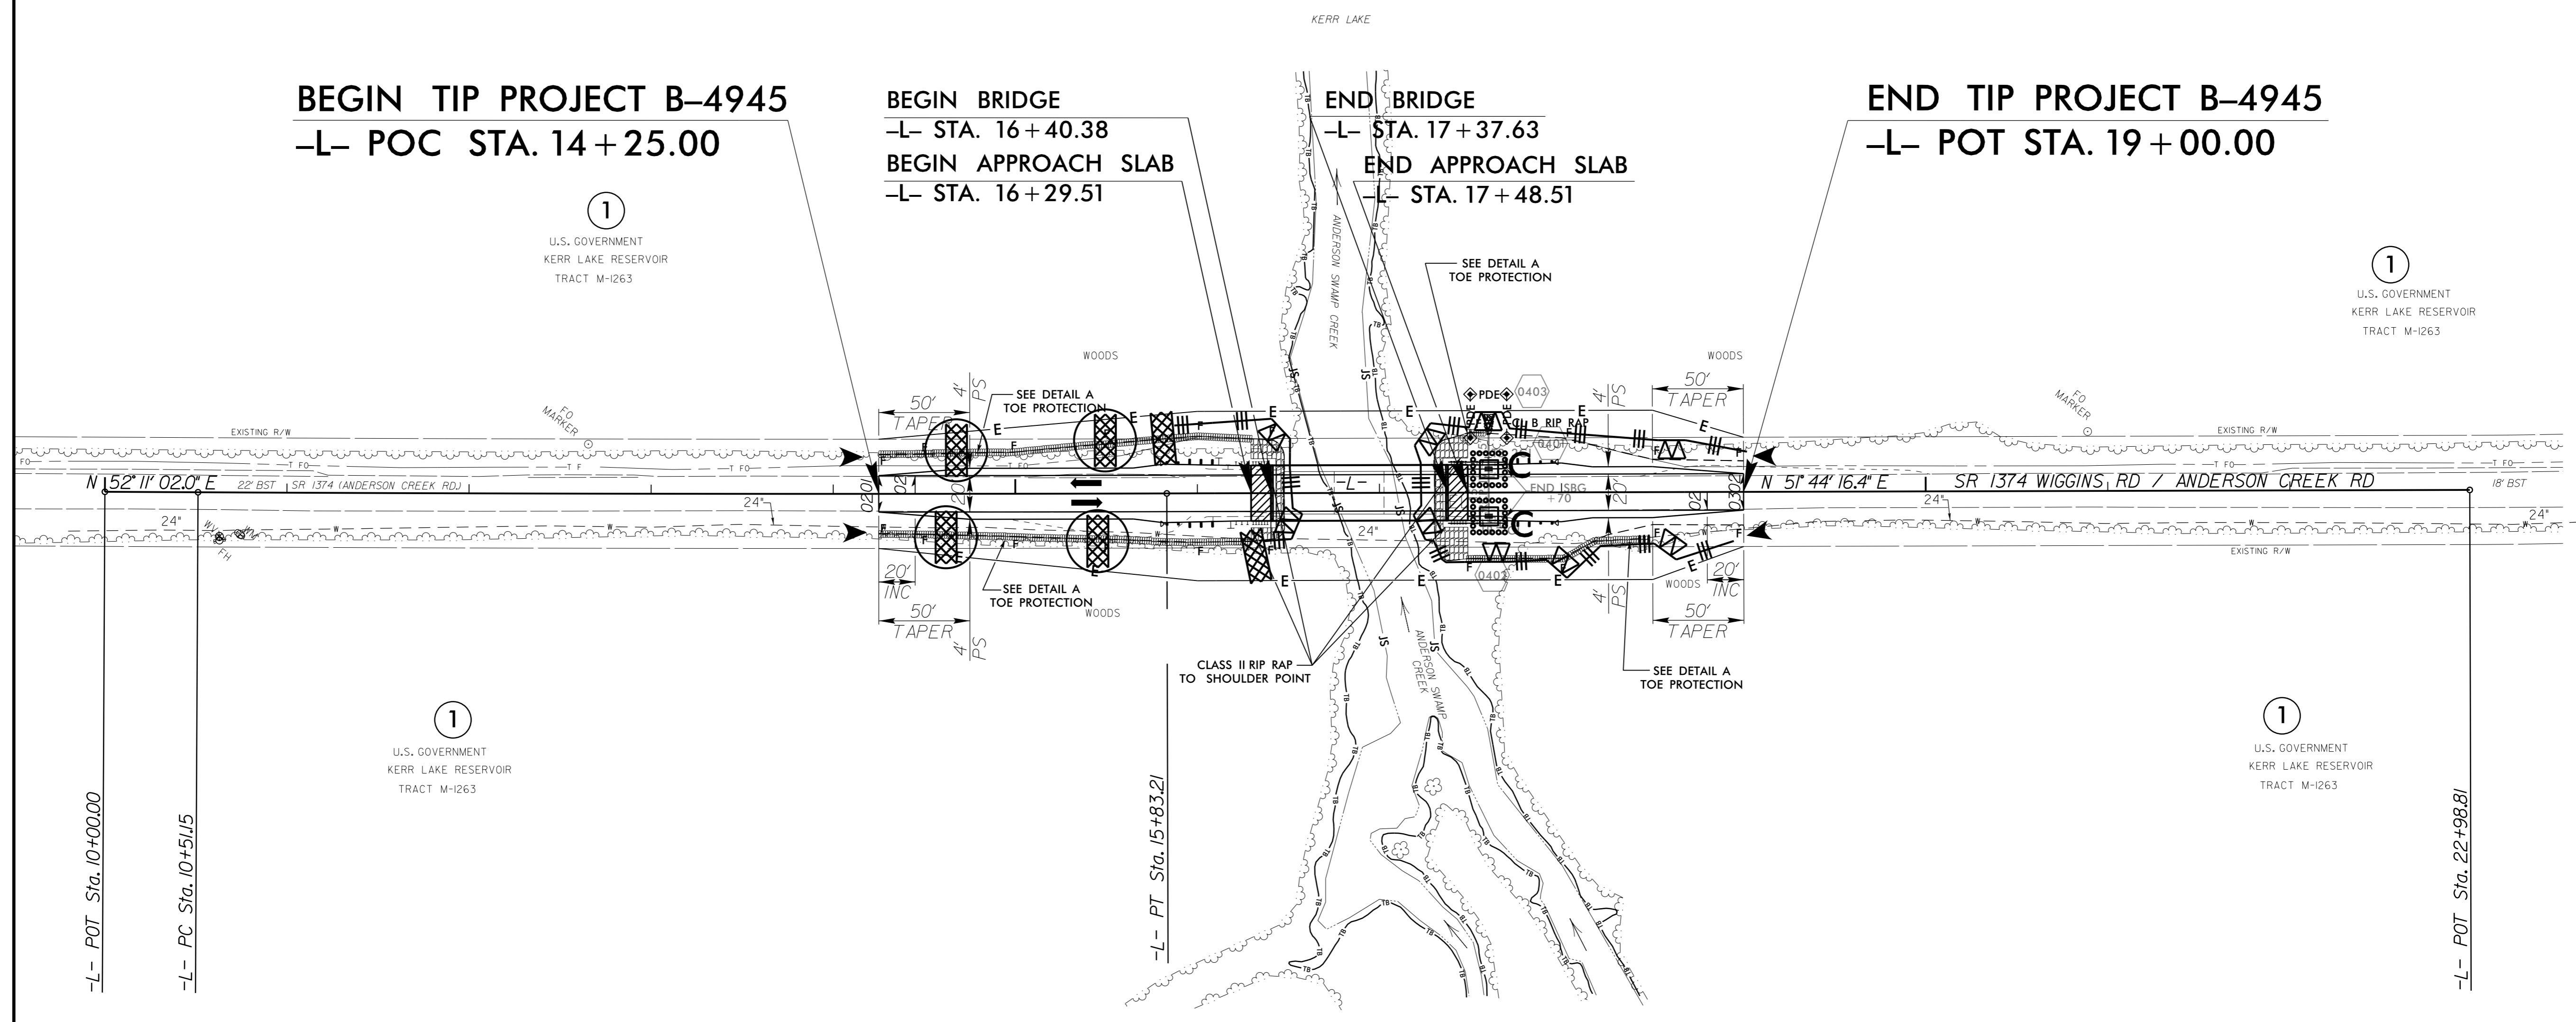

NOTE: IF THE WATER LEVEL IS ELEVATED DURING CONSTRUCTION, THEN THE USE OF A ROCK EMBANKMENT WILL BE NECESSARY TO 1' ABOVE THE WATER LEVEL. SEE DETAIL SHEET 2G-1 FOR DETAIL. IF THE ROCK EMBANKMENT IS NOT NECESSARY, THEN THE TOE PROTECTION MUST BE USED.

09-AUG-2016 14:08  
PR:ENYR:\comm\p\B-4945-EC.psh\_04.dgn  
M:\j\enr\ec\B-4945-EC.dwg