DocuSign Envelope ID: C168A566-1C10-4B33-9407-B7524F16F962

| TIP NO. | SHEET NO. |
|---|---|
| U-3440 | SIGN-2A |

APPROVED: DocuSigned by: Betsy L. Watson 35E67BB34F8743F...

DATE: 6/29/2016

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

Stantec

SIGN NUMBER: 305
TYPE: D
QUANTITY: 1

SIGN WIDTH: 90″
HEIGHT: 18″
TOTAL AREA: 11.3 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 1″
RECESS: 0″

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: U-3440
CHECKED BY: BLW
DIV: 10
DATE: Feb 14, 2016

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | M | o | o | r | e | s | v | i | l | l | e | | 1 | 4 | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 8.2 | 7.7 | 5.8 | 6.2 | 3.7 | 5.4 | 4.2 | 6.6 | 2.9 | 2.9 | 2.6 | 4.7 | 12 | 3.1 | 6 | 8.2 | D 2000 73.7 |

SIGN NUMBER: 306
TYPE: D
QUANTITY: 1

SIGN WIDTH: 90″
HEIGHT: 42″
TOTAL AREA: 26.3 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 1″
RECESS: 0″

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| AR_Type D | 8.7 | 27.3 | 8 | 12 |
| AR_Type D | 69 | 6.8 | 8 | 12 |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: U-3440
CHECKED BY: BLW
DIV: 10
DATE: Feb 14, 2016

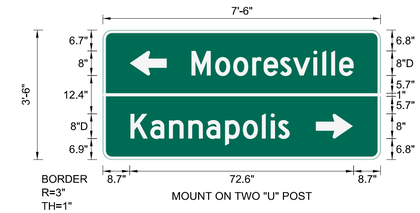


USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | M | o | o | r | e | s | v | i | l | l | e | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 28.7 | 7.7 | 5.8 | 6.2 | 3.7 | 5.4 | 4.2 | 6.6 | 2.9 | 2.9 | 2.6 | 4.7 | 8.7 | | | | | | | | | | D 2000 52.6 |
| | K | a | n | n | a | p | o | l | i | s | | | | | | | | | | | | D 2000 |
| 9 | 6.4 | 6.1 | 6.2 | 5.8 | 6.1 | 5.8 | 6.2 | 2.9 | 2.4 | 3.8 | 29.4 | | | | | | | | | | | 51.6 |

SIGN NUMBER: 307
TYPE: D
QUANTITY: 1

SIGN WIDTH: 72″
HEIGHT: 30″
TOTAL AREA: 15.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 1″
RECESS: 0″

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: U-3440
CHECKED BY: BLW
DIV: 10
DATE: Feb 14, 2016

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | K | a | n | n | a | p | o | l | i | s | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 10.2 | 6.4 | 6.1 | 6.2 | 5.8 | 6.1 | 5.8 | 6.2 | 2.9 | 2.4 | 3.8 | 10.2 | | | | | | | | | | | D 2000 51.6 |
| | C | I | T | Y | | L | I | M | I | T | | | | | | | | | | | | D 2000 |
| 15.4 | 5.4 | 1.9 | 4.1 | 5.2 | 6 | 4.6 | 2.4 | 6.1 | 1.9 | 3.7 | 15.4 | | | | | | | | | | | 41.2 |

SIGN NUMBER: 308
TYPE: D
QUANTITY: 1

SIGN WIDTH: 54″
HEIGHT: 24″
TOTAL AREA: 9.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 0.75″
RECESS: 0″

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: U-3440
CHECKED BY: BLW
DIV: 10
DATE: Feb 14, 2016




USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | K | a | n | n | a | p | o | l | i | s | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 7.6 | 4.8 | 4.6 | 4.7 | 4.4 | 4.6 | 4.3 | 4.6 | 2.2 | 1.8 | 2.8 | 7.7 | | | | | | | | | | | D 2000 38.7 |
| | C | I | T | Y | | L | I | M | I | T | | | | | | | | | | | | D 2000 |
| 13.3 | 3.6 | 1.2 | 2.7 | 3.4 | 4 | 3.1 | 1.6 | 4.1 | 1.2 | 2.5 | 13.3 | | | | | | | | | | | 27.5 |

SIGN DESIGNS

$$$$SYSTIME$$$$
$$$$