

PHASING DIAGRAM


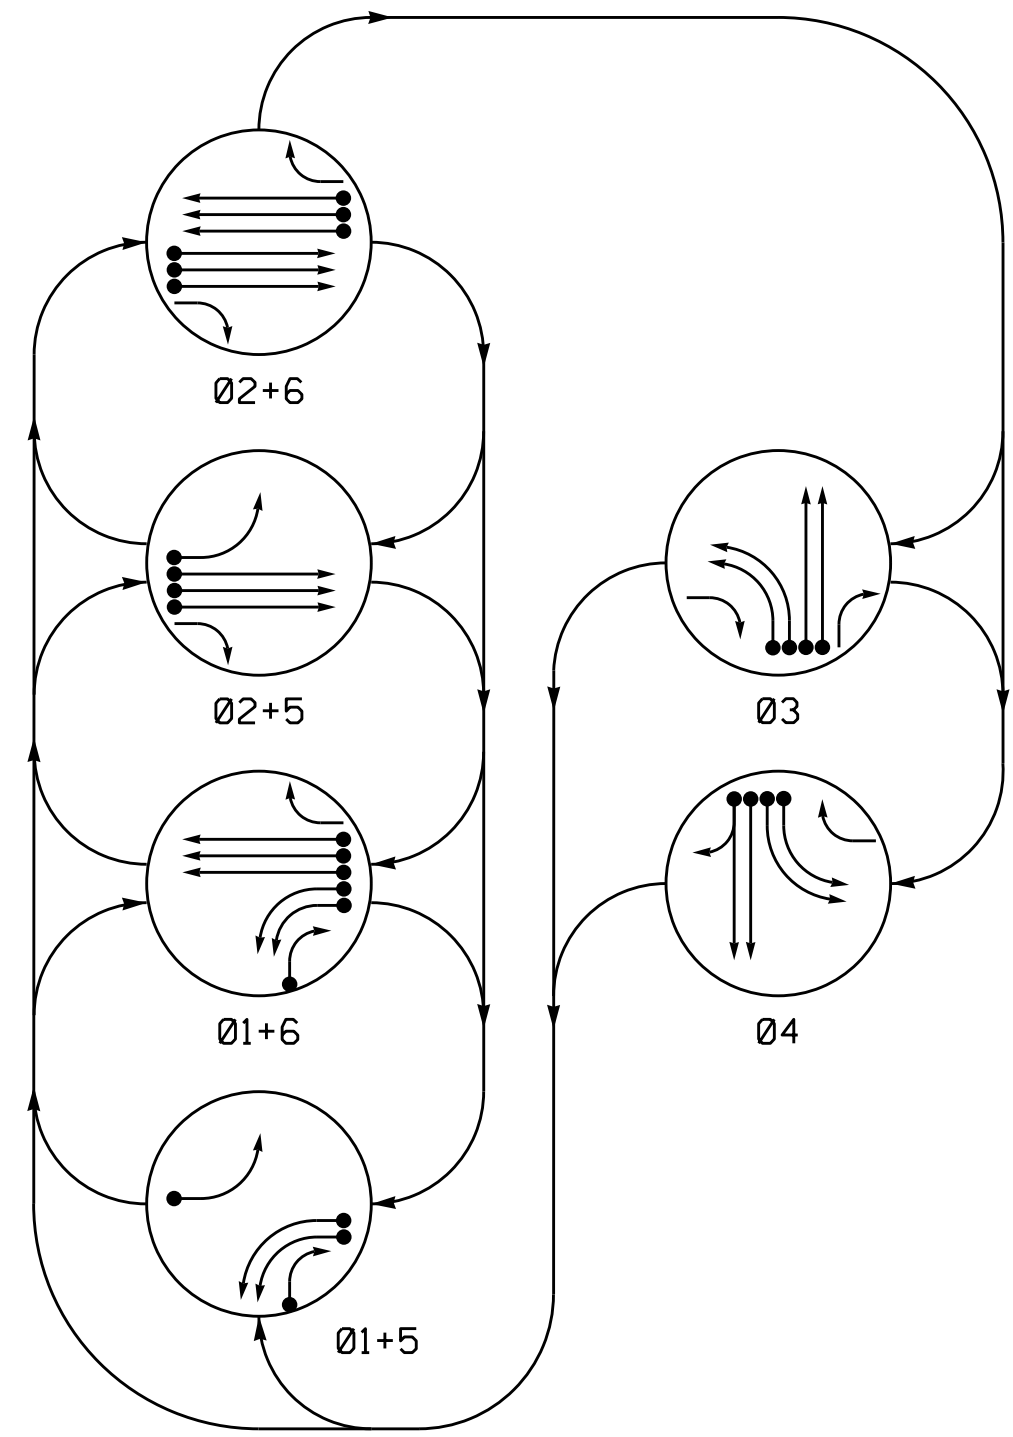


TABLE OF OPERATION

SIGNAL FACE	PHASE					
	01+5	01+6	02+5	02+6	03	04
11,12	—	—	—	—	—	—
21,22	R	R	G	G	R	R
23	R	R	G	G	R	Y
31,32	—	—	—	—	—	—
33	R	R	R	R	G	R
34	R	R	R	R	G	R
41,42	—	—	—	—	—	—
43,44	R	R	R	R	R	G
51	—	—	—	—	—	—
61,62	R	G	R	G	R	R
63	R	G	R	G	R	Y

SIGNAL FACE I.D.

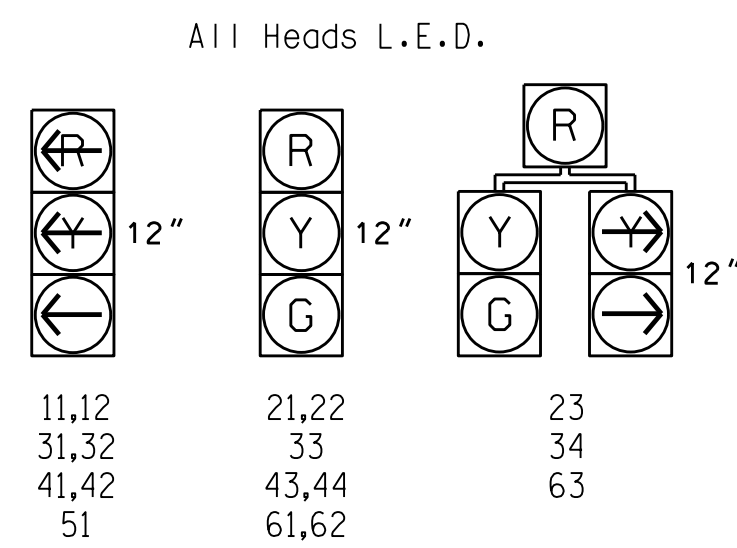

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	TYPE	SYSTEM LOOP NEW CARD	
1A	6X40	0	2-4-2	-	1	Yes	-	3	S	-	X
1B	6X40	0	2-4-2	-	1	Yes	-	-	S	-	X
1C	6X40	0	2-4-2	-	1	Yes	-	15	S	-	X
2A,2B,2C	6X6	70	4	-	2	Yes	-	-	S	-	X
3A	6X40	0	2-4-2	-	3	Yes	-	3	S	-	X
3B	6X40	0	2-4-2	-	3	Yes	-	-	S	-	X
3C	6X40	0	2-4-2	-	3	Yes	-	-	S	-	X
4A	6X40	0	2-4-2	-	4	Yes	-	-	S	-	X
4B	6X40	0	2-4-2	-	4	Yes	-	-	S	-	X
4C	6X40	0	2-4-2	-	4	Yes	-	-	S	-	X
4D	6X40	0	2-4-2	-	4	Yes	-	10	S	-	X
5A	6X40	0	2-4-2	-	5	Yes	-	-	S	-	X
6A,6B,6C	6X6	70	4	-	6	Yes	-	-	S	-	X
S2A	6X6	+300	4	-	-	No	-	-	N	X	X
S2B	6X6	+300	4	-	-	No	-	-	N	X	X
S2C	6X6	+300	4	-	-	No	-	-	N	X	X
S6A	6X6	+350	3	-	-	No	-	-	N	X	X
S6B	6X6	+350	3	-	-	No	-	-	N	X	X
S6C	6X6	+350	3	-	-	No	-	-	N	X	X


6 Phase Fully Actuated Fayetteville Signal System

NOTES

1. Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Phase 1 or phase 5 may be lagged.
4. The order of phase 3 and phase 4 may be reversed.
5. Set all detector units to presence mode.
6. In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
7. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
8. Pavement markings are existing.
9. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

PHASING DIAGRAM DETECTION LEGEND


- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- PEDESTRIAN MOVEMENT

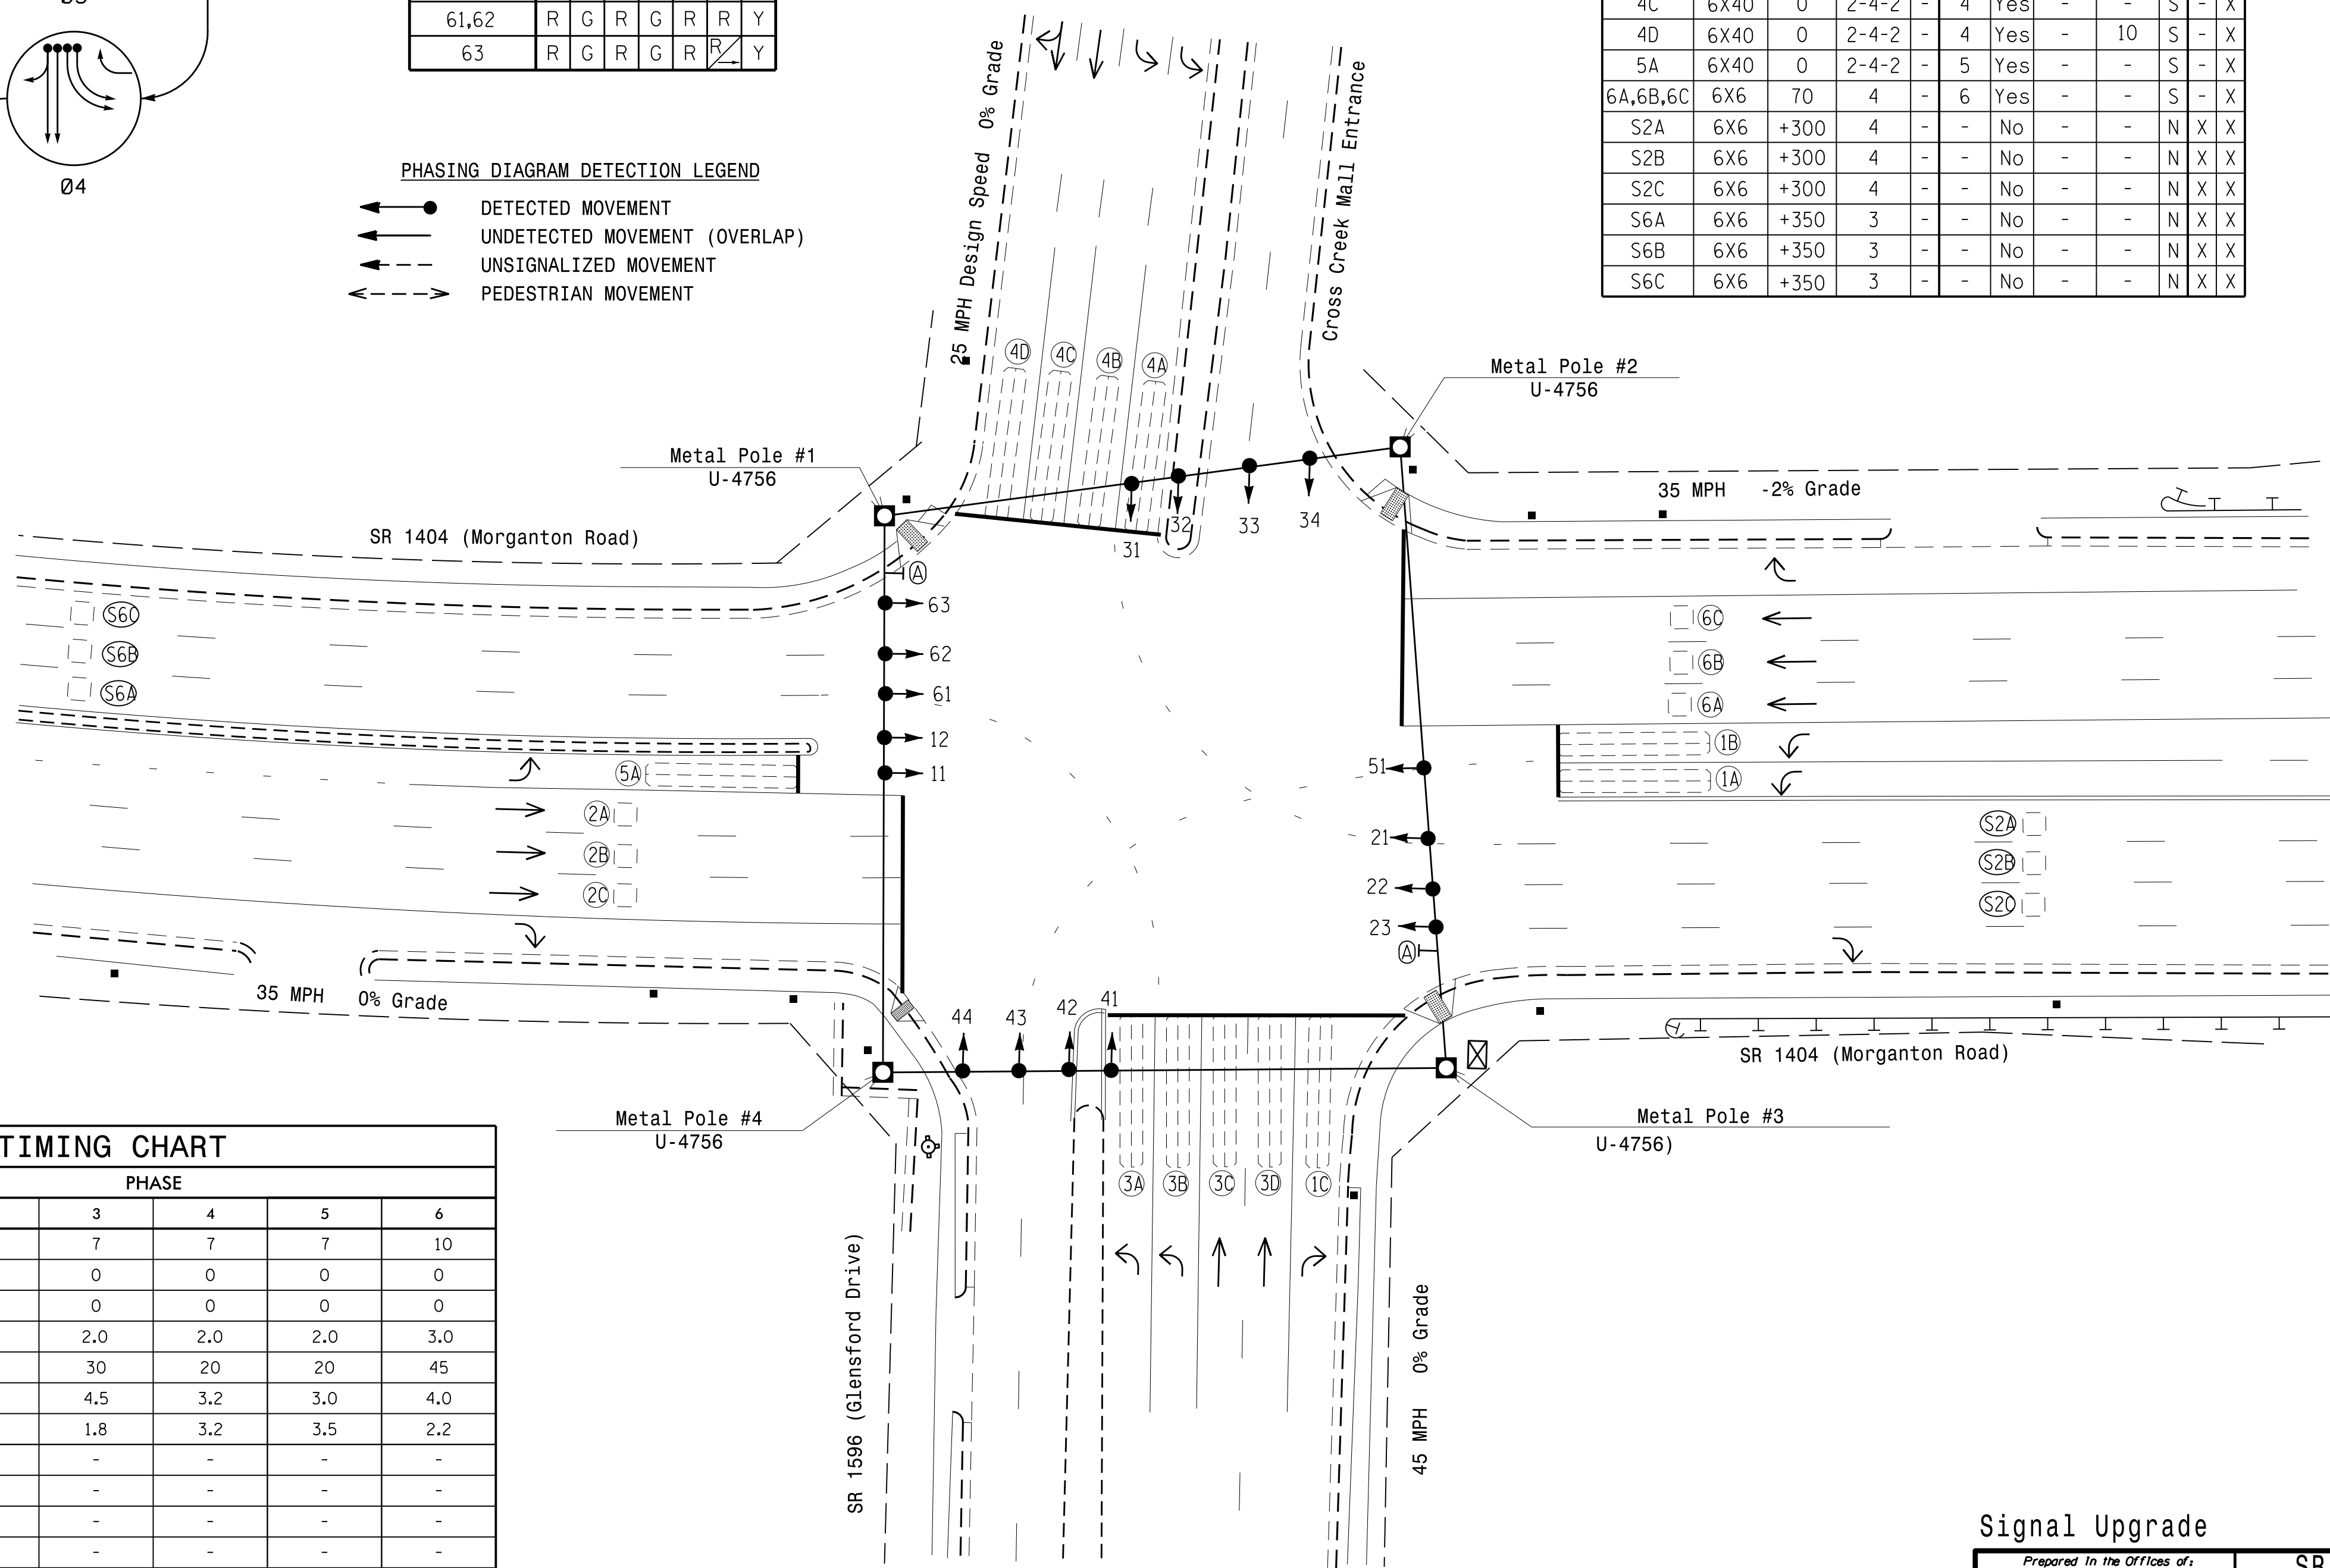

ASC/3 TIMING CHART

FEATURE	PHASE					
	1	2	3	4	5	6
Min Green *	7	10	7	7	7	10
Walk *	0	0	0	0	0	0
Ped Clear	0	0	0	0	0	0
Veh. Extension *	2.0	3.0	2.0	2.0	2.0	3.0
Max 1 *	20	45	30	20	20	45
Yellow	3.0	4.0	4.5	3.2	3.0	4.0
Red Clear	4.2	2.2	1.8	3.2	3.5	2.2
Actuations B4 Add *	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-
Time Before Reduction *	-	-	-	-	-	-
Time To Reduce *	-	-	-	-	-	-
Minimum Gap	-	-	-	-	-	-
Locking Detector	-	X	-	-	-	X
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

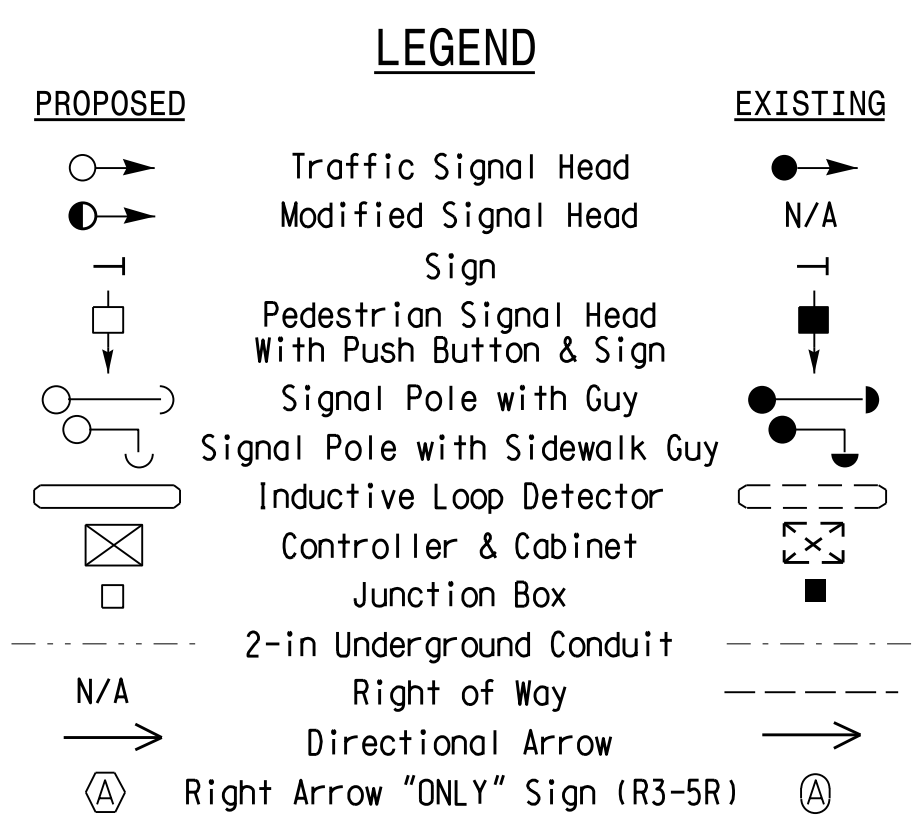

Signal Upgrade

SR 1404 (Morganton Road) at Cross Creek Mall Entrance / SR 1596 (Glensford Drive)

Division 6 Cumberland County Fayetteville

PLAN DATE: February 2016 PREPARED BY: KGP, Jr. REVIEWED BY: JPG

750 N. Greenfield Pkwy, Garner, NC 27529

SCALE 1"=30'

REVISIONS: _____ INIT: _____ DATE: _____

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER JASON P. GALLOWAY 029904 5/6/2016

SIG. INVENTORY NO. 06-0346

08-011-2016 11:12
 S:\X\T\ASU\TIS\S\Signal\Signal Design\Section\Eastern Region\01\U-5742 Fayetteville ASC\3\66-0346\0346.s1g.dsn_2016mmds.dgn
 kgpae@finc