



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2017CPT.10.07.10901J - ETC. 2017CPT.10.07.20901J - ETC.	11	
F.A. PROJECT NO.			

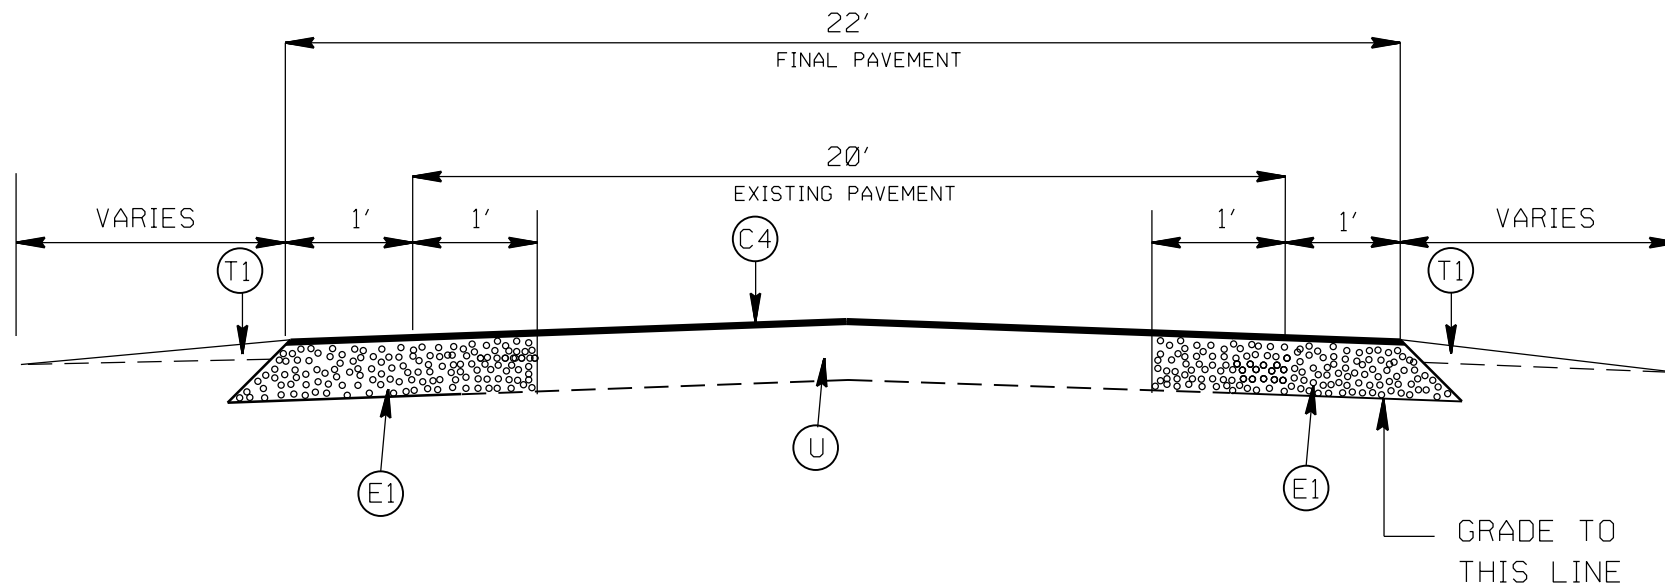


TYPICAL SECTION NO. 7
 SR 1346 BEULAH CHURCH ROAD (MAP 5)
 FROM SR 1344 (STA: 10+00 TO STA: END OF MAP)
 SR 1346 BEULAH CHURCH ROAD (MAP 6)
 FROM (STA: 64+20 TO END OF MAP)

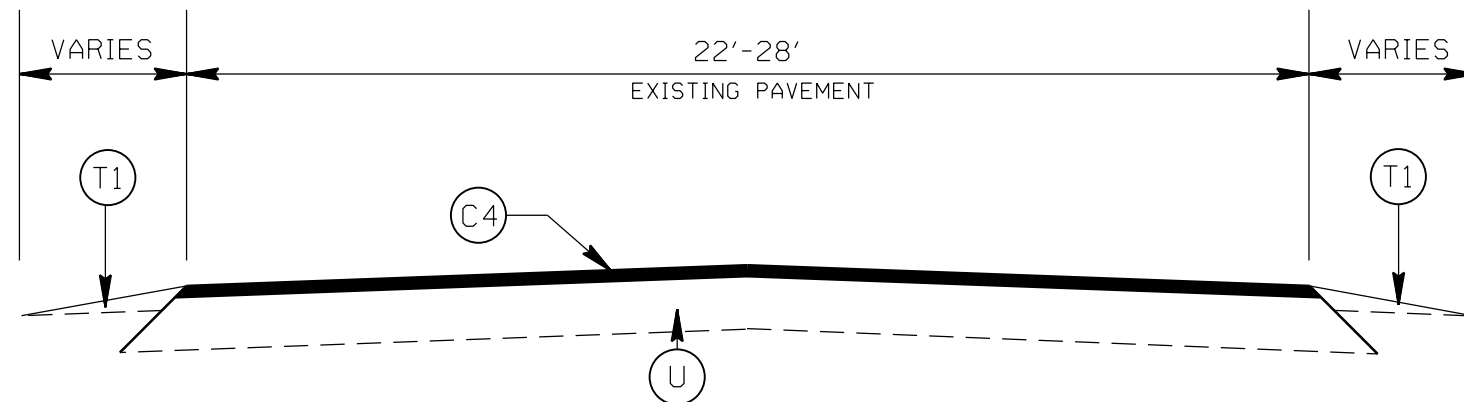

TYPICAL SECTION NO. 8
 SR 1346 BEULAH CHURCH ROAD (MAP 5 & 6)

PAVEMENT SCHEDULE

(C1)	PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
(C2)	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(C3)	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(C4)	PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
(D1)	PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE CORSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
(D2)	AST MAT COAT # 78M
(E1)	PROPOSED 5" OF ASPHALT CONC. BASE COURSE, B25.0C, AT AN AVERAGE RATE 570 LBS. PER SQ. YD.
(T1)	SHOULDER RECONSTRUCTION
(U)	EXISTING PAVEMENT
(V1)	MILLING OF EXISTING PAVEMENT, 2.0" IN DEPTH.
(V2)	PROFILE MILLING EXISTING ASPHALT, 0 - 1.5"

2017-2018 UNION COUNTY RESURFACING CONTRACT #1			
SCALE	-NA-		REVISIONS
DATE	12/16		
DWG. BY	AMO		
DESIGN BY	AMO		
APPROVED	CLA		