

ITS-5.08 U-4715B

## SPARE CABLE STORAGE TYP. DETAIL

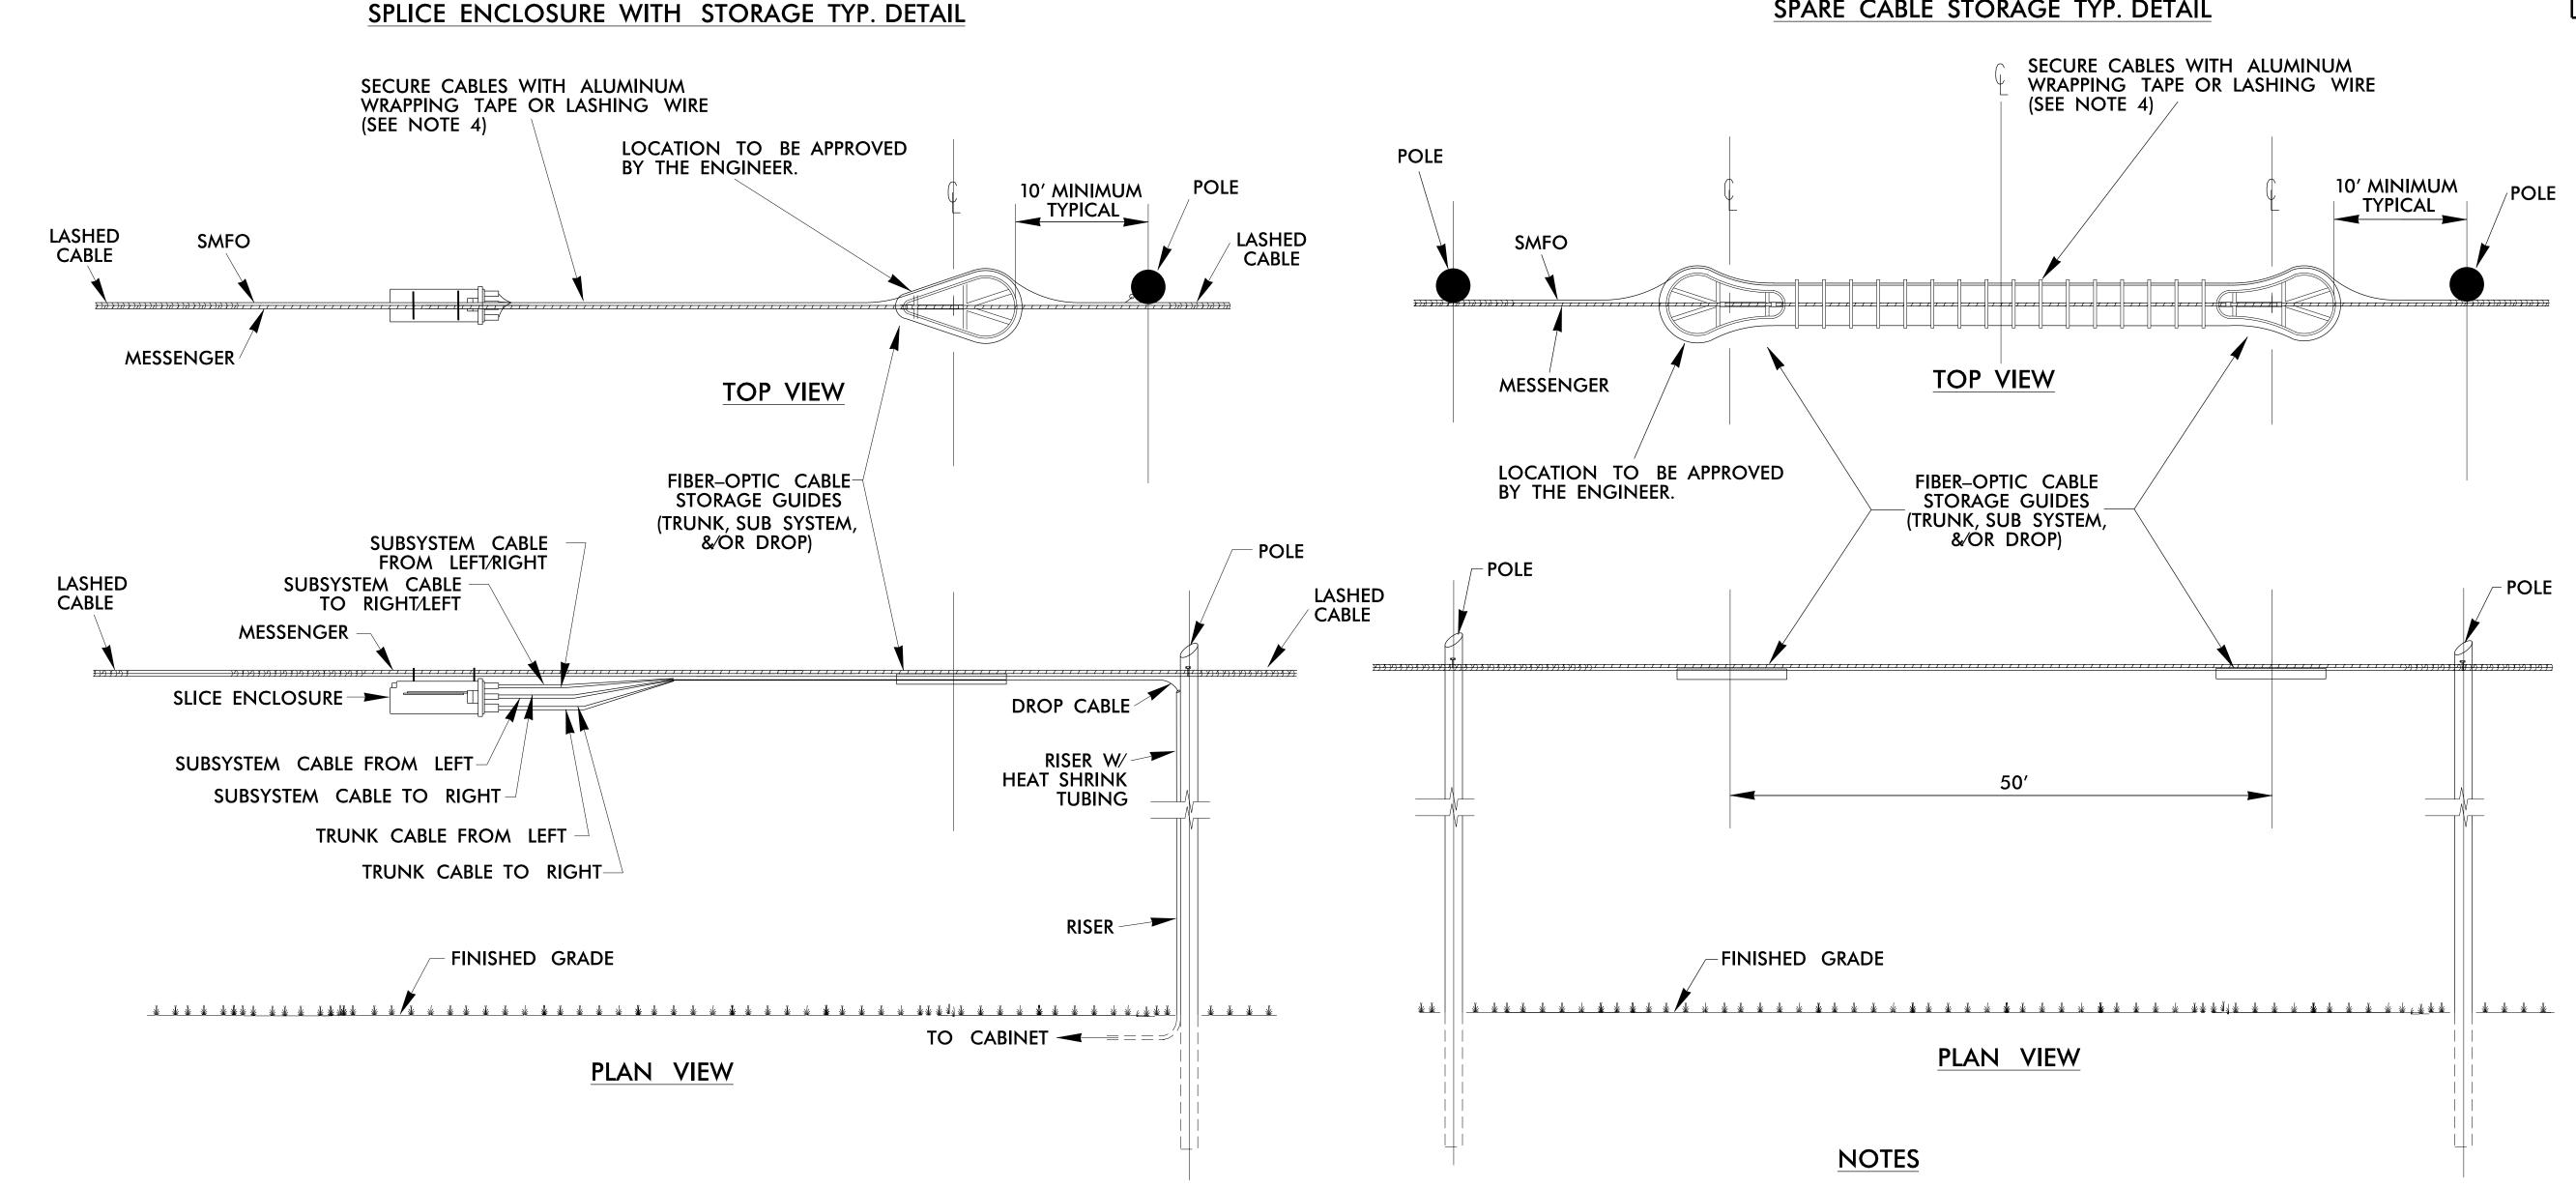

## SPLICE ENCLOSURE DETAILS

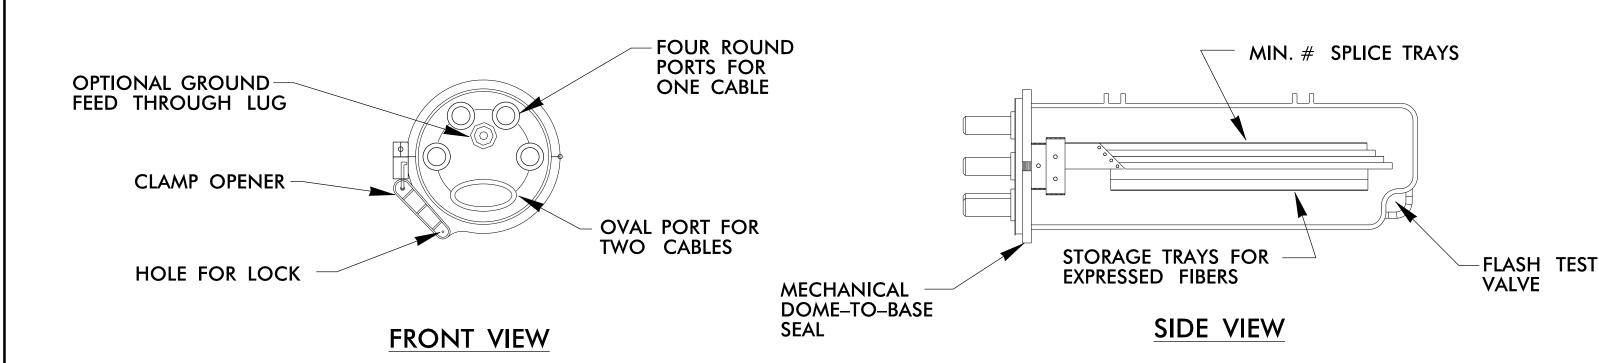

- 1. SPARE FIBER-OPTIC CABLE SHALL NOT BE STORED OVER ROADWAYS OR DRIVEWAYS.
- 2. STORE 100' OF SPARE FIBER-OPTIC CABLE WHERE SHOWN ON PLANS.
- 3. FIBER-OPTIC CABLE STORAGE GUIDE MATERIAL AND SIZE SHALL BE AS INDICATED IN THE PROJECT SPECIAL PROVISIONS.
- 4. 0.05" THICK BY 0.3" WIDE ALUMINUM WRAPPING TAPE (FOUR TURNS MINIMUM) AT 6" ON CENTER OR .061" LASHING WIRE WITH ONE 360 DEGREE SPIRAL PER FOOT.
- 5. FOR SPLICE ENCLOSURES:
  - A) APPLY A HEAT SOURCE, AS RECOMMENDED BY THE MANUFACTURER, TO SHRINK THE HEAT SHRINKABLE TUBING TO PROVIDE A SECURE FIT AROUND THE CABLES AND PORTS. B) PERFORM A PRESSURIZATION FLASH TEST UPON CONCLUSION OF THE SPLICING AND PRIOR TO THE FINAL PLACEMENT OF THE ENCLOSURE.

60 Greenfield Parkway, Garner, NC 27529

N.T.S.



Storage & Splice Enclosures Division 13 Buncombe County Asheville PLAN DATE: December 2016 REVIEWED BY: M B Toth

PREPARED BY: A M Quigley REVIEWED BY: J T BROOKS INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS tenry Alfred Badgett III 12/21/2016 CADD Filename: 270\_038\_U-4715E