


EDI MODEL 2018ECL-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

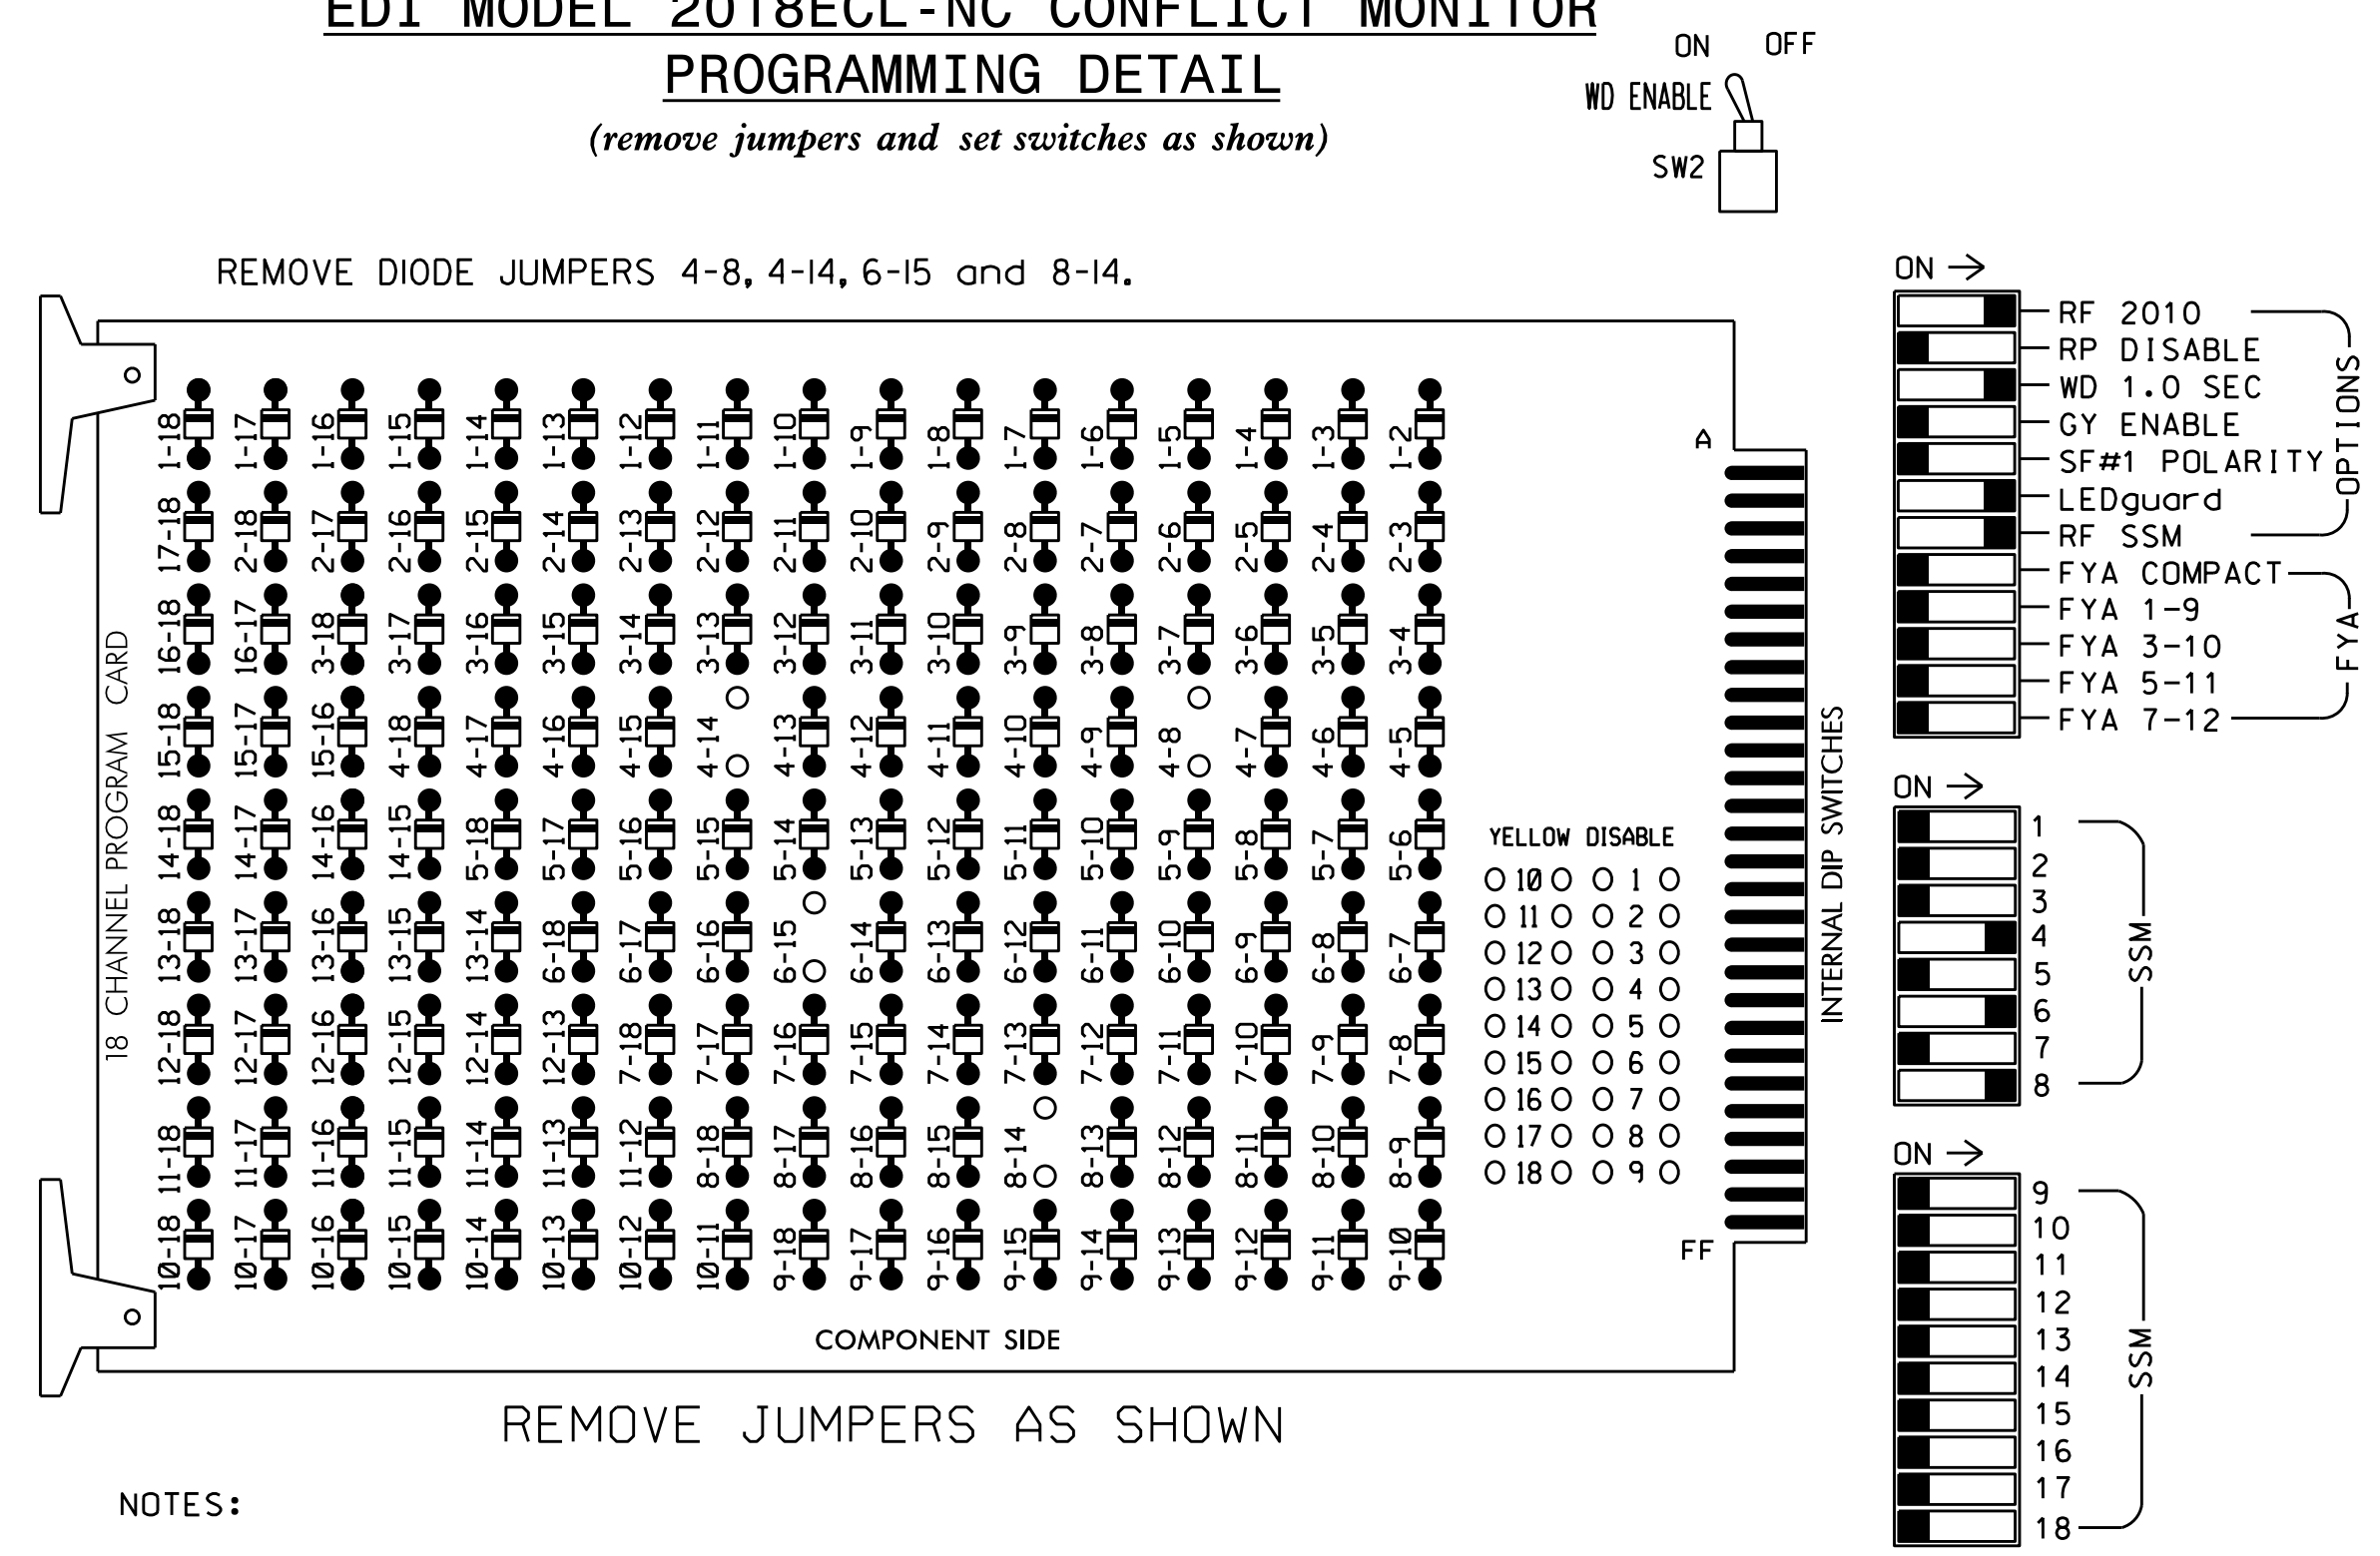

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Gap-Out for all phases.
- Program phase 6 for Gap Reduction.
- Program phase 6 for Start Up In Green.
- Program phases 4 and 6 for 'STARTUP PED CALL'.
- Program phases 4, 6 and 8 for Red Rest.
- The cabinet and controller are part of the NC 119 CLS.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 (12-STD; 6-AUX)
 LOAD SWITCHES USED.....S5,S6,S8,S9,S11
 PHASES USED.....4,4 PED,6,6 PED,8
 OVERLAP 'A'.....NOT USED
 OVERLAP 'B'.....NOT USED
 OVERLAP 'C'.....NOT USED
 OVERLAP 'D'.....NOT USED


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	NU	NU	NU	NU	42,43	44	P41, P42	NU	61,62	63	P61, P62	NU	81,82 83	NU	NU	NU	NU	NU
RED					101					134								
YELLOW					102					135								
GREEN																		
RED ARROW						101				134		107						
YELLOW ARROW						102				135		108						
GREEN ARROW					103	103			136	136		109						
Hand icon							104				119							
Person icon							106				121							

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

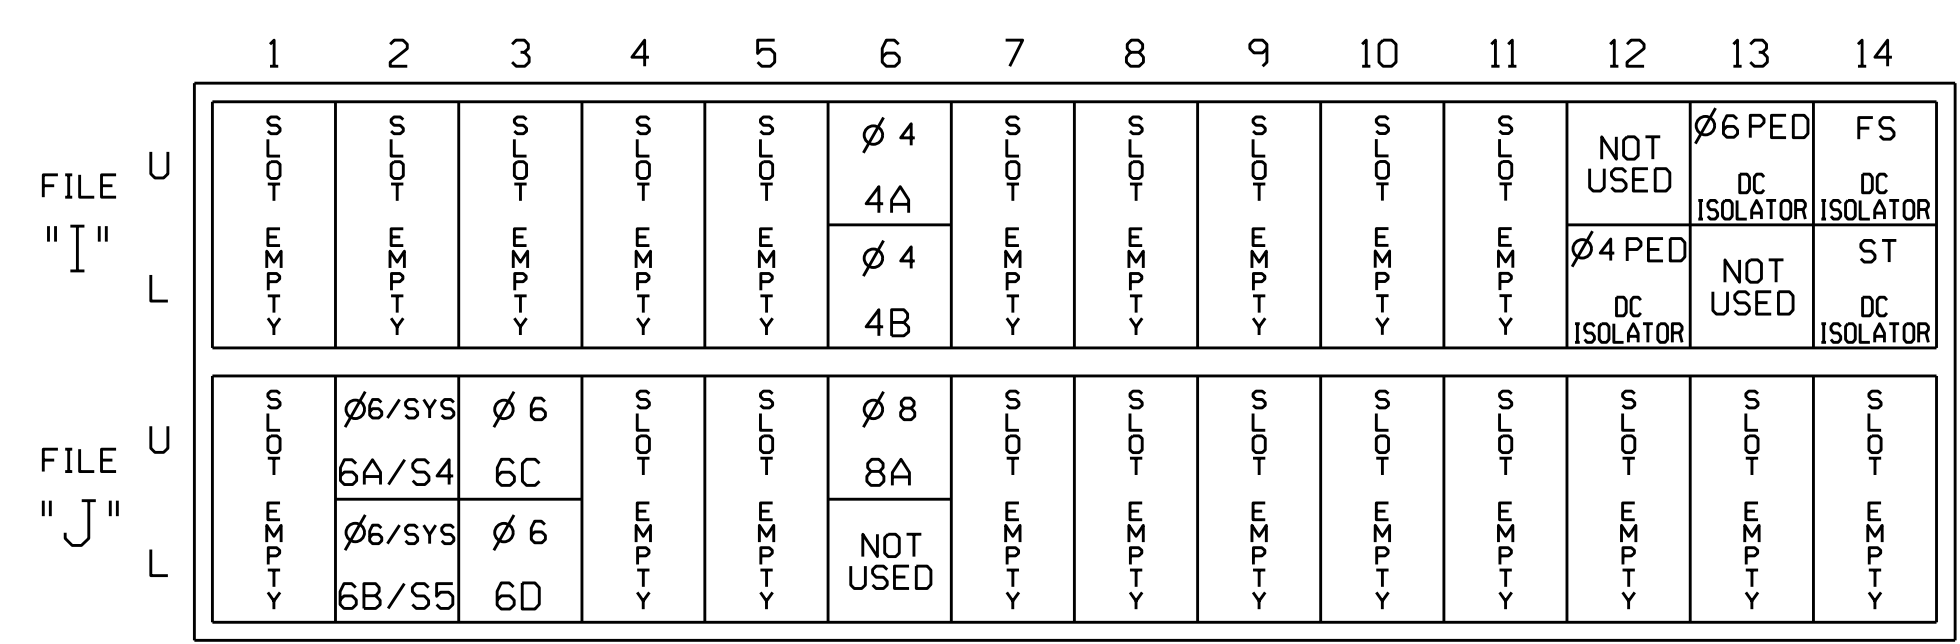

EX.: 1A, 2A, ETC. = LOOP NO.'S


FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			
4B	TB4-11,12	I6L	45	7	14	4	Y	Y			
6A/S4	TB3-5,6	J2U	40	2	6	6/SYS		Y			
6B/S5	TB3-7,8	J2L	44	6	16	6/SYS		Y			
6C	TB3-9,10	J3U	64	26	36	6	Y	Y			
6D	TB3-11,12	J3L	77	39	46	6	Y	Y			
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			
PED PUSH BUTTONS											
P41,P42	TB8-5,6	I12L	69	31	PED 4	4 PED					
P61,P62	TB8-7,9	I13U	68	30	PED 6	6 PED					

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS I12 AND I13.

INPUT FILE POSITION LEGEND: J2L

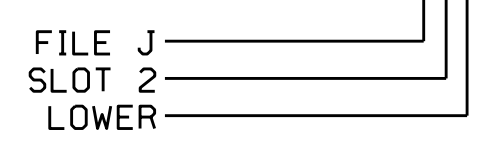

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 07-0441T3
 DESIGNED: November 2016
 SEALED: 1/25/17
 REVISED: N/A

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown PED Signals are required to display timing only during Ped Clearance Interval. Consult PED Signal Module user's manual for instructions on selecting this feature.

Electrical Detail - Temp 3 (TMP Phase IIA)

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Prepared In the Offices of:
 Transportation Mobility and Safety Solutions
 Signal Management System
 750 N. Greenfield Pkwy, Garner, NC 27529

NC 119 at I-40 WB/I-85 SB Ramps

Division 7 Alamance County Mebane

PLAN DATE: January 2017 REVIEWED BY: BAS

PREPARED BY: B. SIMMONS REVIEWED BY:

REVISIONS INIT. DATE

Seal: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 030530 JACUARY M. LITTLE

DocuSigned by: Zachary M. Little 1/30/2017

SIG. INVENTORY NO. 07-0441T3

3D-1116-2017_08-18
 S:\IT\SSU\115_Signal\working\p04\vision_07\0441_smc_elec_xxx.dgn
 bjs/simmons