

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

```

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: |XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'B' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: |XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: |XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

PRESS '+'

```


PAGE 1: VEHICLE OVERLAP 'D' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: |XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)

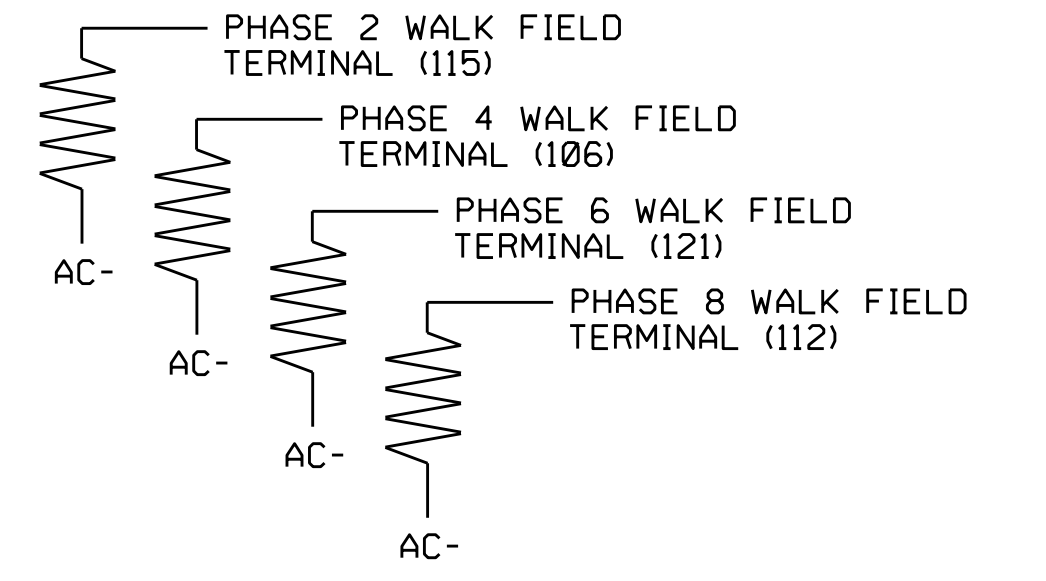

| ACCEPTABLE VALUES | |
|-------------------|-----------|
| VALUE (ohms) | WATTAGE |
| 1.5K - 1.9K | 25W (min) |
| 2.0K - 3.0K | 10W (min) |

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 12-0596T
 DESIGNED: January 2017
 SEALED: 2/20/2017
 REVISED:

Electrical Detail - Temporary Design - Sheet 2 of 7

| | | | |
|--|---|---|----------|
| ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared In the Offices of: | NC 150 (Cherryville Rd.) at NC 180 (North Post Rd.) | | SEAL |
| | Division 12 PLAN DATE: February 2017 PREPARED BY: C. Strickland | Cleveland County Sheiby REVIEWED BY: T. Joyce REVIEWED BY: | |

06-MAR-2017 14:17
 S:\MITS\0115\SigMgmt\work\hous\sig\Map\strickland\20596_sml_e_xx.dgn
 ceastrickland