
					B-4447	EC-5/CONST.2B-2
					R/W SHEET NO.	
					ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
CULVERT	CONSTRUCTION	SEQUENCE	STA. 24+88	_L _		

- 1. UTILIZE SPECIAL STILLING BASIN(S) AS NEEDED THROUGHOUT CULVERT CONSTRUCTION.
- 2. CONSTRUCT IMPERVIOUS DIKES AND INSTALL 36 INCH TEMPORARY PIPE, DIVERTING FLOW.
- 3. CONSTRUCT PROPOSED CULVERT EXTENSION, AND ANY NECESSARY UPSTREAM CHANNEL IMPROVEMENTS.
- 4. REMOVE IMPERVIOUS DIKE AND 36 INCH TEMPORARY PIPE, ALLOWING NORMAL FLOW THROUGH CULVERT.
- 5. REMOVE ANY REMAINING SPECIAL STILLING BASIN(S).
- 6. COMPLETE DETOUR ROADWAY CONSTRUCTION.



PROJECT REFERENCE NO.

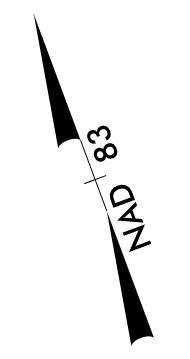