
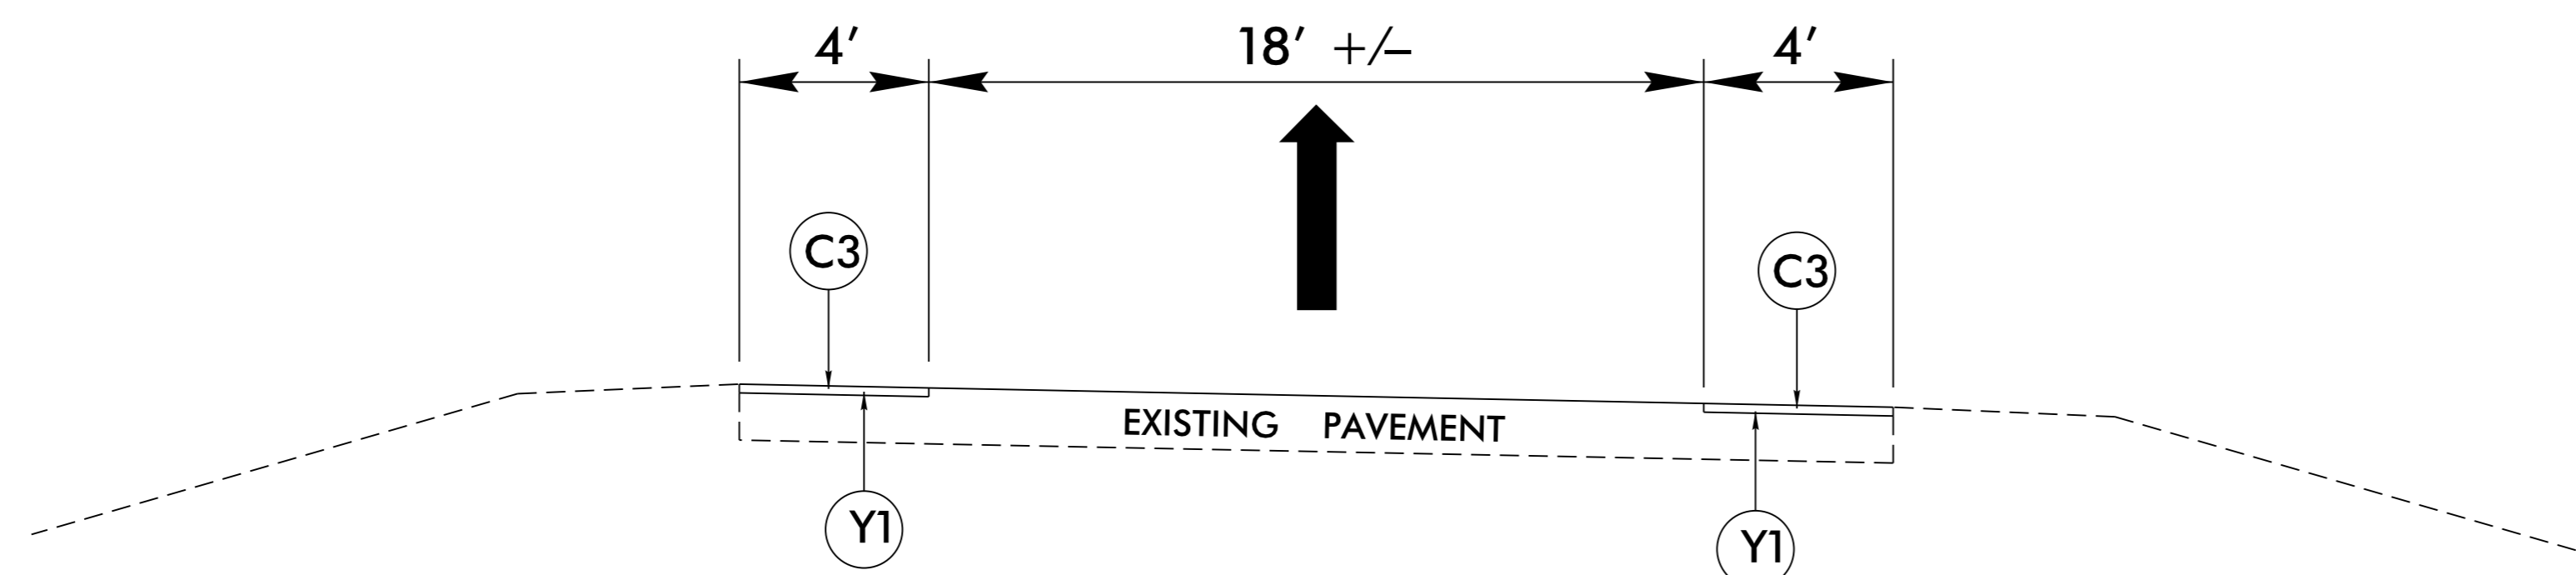
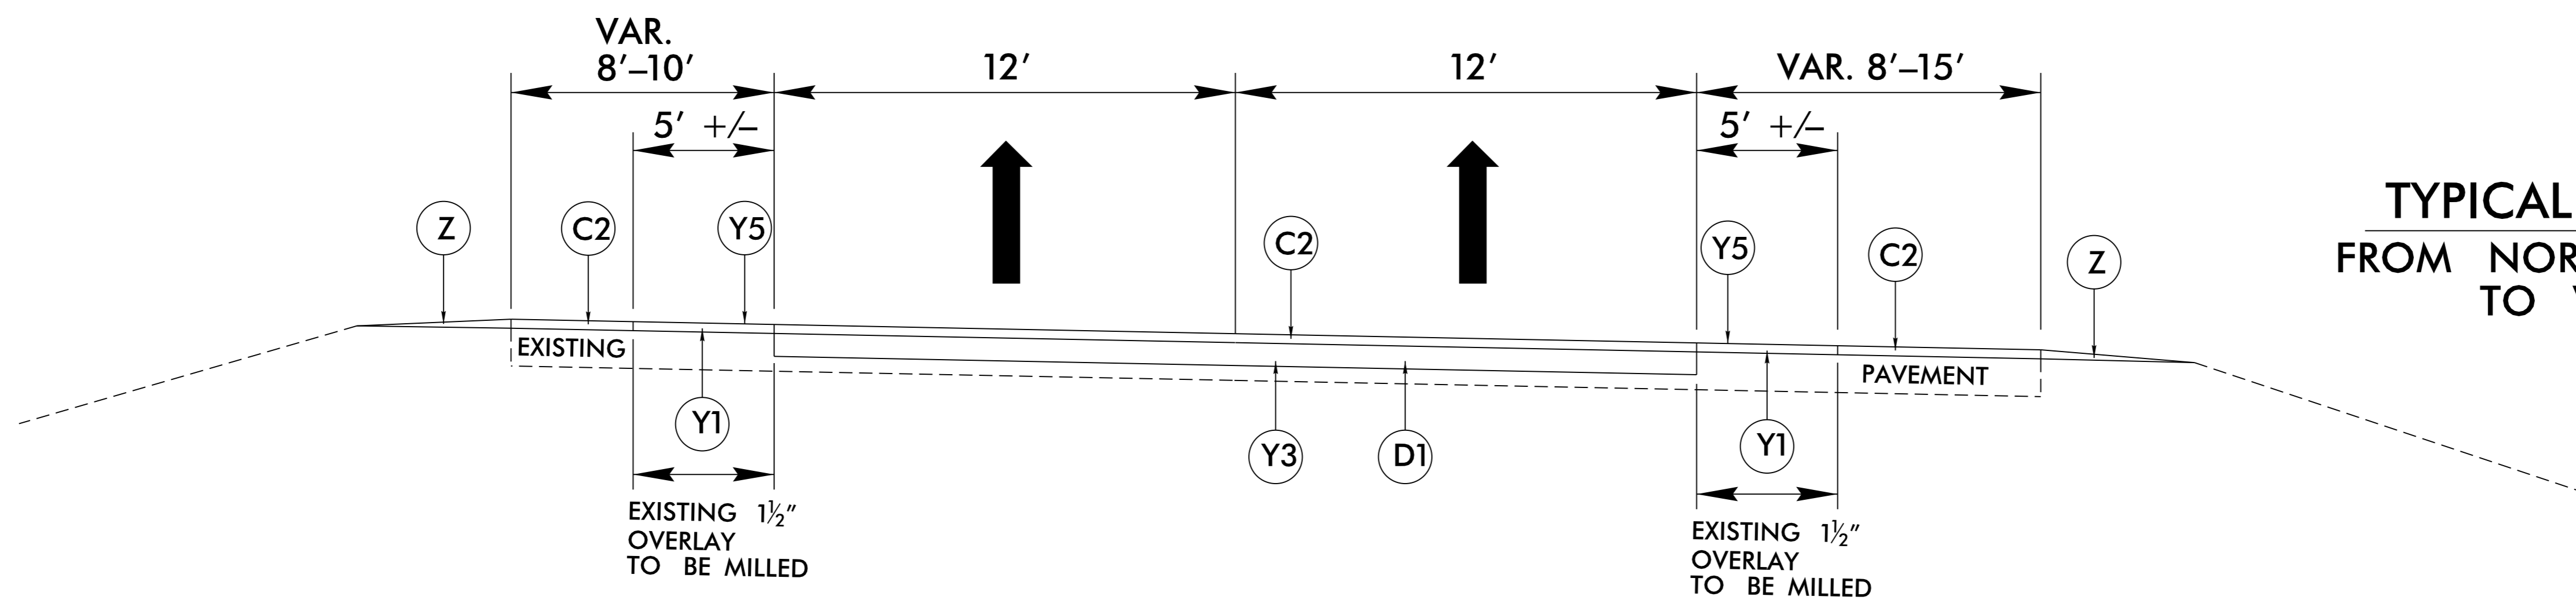


6/2/99

C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	Y1	MILL ASPHALT 1.5" DEEP	Z	SHOULDER RECONSTRUCTION USING AGGREGATE SHOULDER BORROW AS DIRECTED
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	Y3	MILL ASPHALT 4" DEEP		
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	Y5	MILLED RUMBLE STRIPS		

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

PROJECT REFERENCE NO. 1-5839	SHEET NO. 2A-2
ROADWAY DESIGN ENGINEER	
5/26/2017	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	



6/2/99
 11
 10
 9
 8
 7
 6
 5
 4
 3
 2
 1