	PAVEMENT SCHEDULE		
C1	$1lac{1}{2}^{\prime\prime}$ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	J	EXISTING PAVEMENT
C2	$1lash2^{\prime\prime}$ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	V1	1½" MILLING
S	SHOULDER GRADING ASB REQUIRED (EXCEPT AT RESIDENTIAL AREAS)	V2	0"to 1½" MILLING

PROJECT REFERENCE NO.	SHEET NO.
2018CPT.05.06J092IJ.etc.	8

INCIDENTAL MILLING

BEGINNING OR END OF MAP, EXISTING CONCRETE PAVEMENT OR NON-RESURFACEABLE BRIDGE DECKS

NOTE: A TEMPORARY ASPHALT WEDGE WILL BE REQUIRED IMMEDIATELY AFTER MILLING TO ENSURE SMOOTH TRAVEL IF THE FINAL LAYER OF SURFACE COURSE IS NOT PLACED ON THE SAME DAY AS MILLING


25'/inch of surface lift

MILL EXISTING PAVEMENT

APPROX. THICKNESS OF SURFACE COURSE

DETAIL OF PROJECT LIMITS AT

UNSIGNALIZED Y LINES

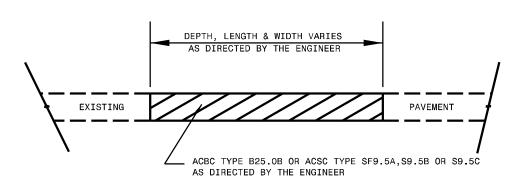

PATCHING EXISTING PAVEMENT

DETAIL OF PROJECT LIMITS AT

SIGNALIZED Y LINES

MILLING TO BE PERFORMED PRIOR TO PATCHING

