



APPROVED: Charles A. Johnson, III  
 DATE: 7/6/2017

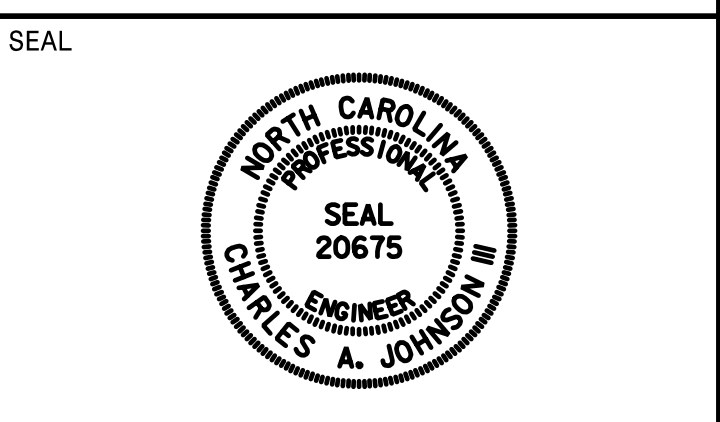

DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED

SIGN NUMBER: 105A,106A,109A, BACKG COLOR: Green  
 111A,112A COPY COLOR: White  
 TYPE: B  
 QUANTITY: 5  
 SIGN WIDTH: 9'-6"  
 HEIGHT: 2'-6"  
 TOTAL AREA: 23.8 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 3"  
 NO. Z BARS: 2  
 LENGTH: 106.0  
 MAT'L: 0.125" ALUMINUM

DESIGN BY: TRT CHECKED BY: ADK/CAJ  
 PROJECT ID: U-4751 DIV: 03 DATE: March 2017

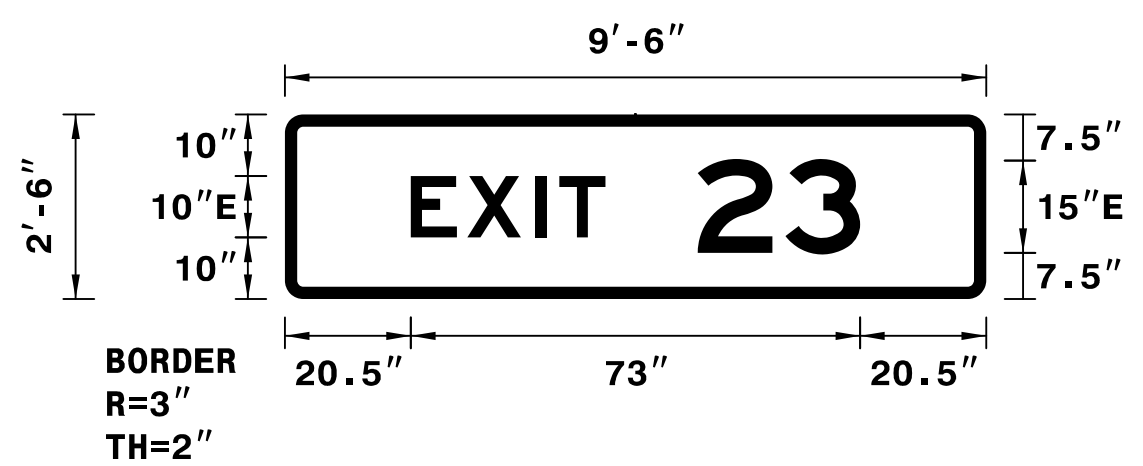

Spacing Factor is 1 unless specified otherwise  
 Spacing Factor for "EXIT" is 1.2


NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size Text Length
	E	X	I	T							E 2000
20.5	9.2	11.1	3.8	7.5	61.9						31.6
	2	3									E 2000
67.1	14.3	12.2	20.5								26.4

SIGN NUMBER: 105B,112B BACKG COLOR: Green  
 TYPE: A COPY COLOR: White  
 QUANTITY: 2  
 SIGN WIDTH: 13'-0"  
 HEIGHT: 12'-6"  
 TOTAL AREA: 162.5 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 4  
 LENGTH: 148.0  
 MAT'L: 0.125" ALUMINUM

DESIGN BY: TRT CHECKED BY: ADK/CAJ  
 PROJECT ID: U-4751 DIV: 03 DATE: March 2017

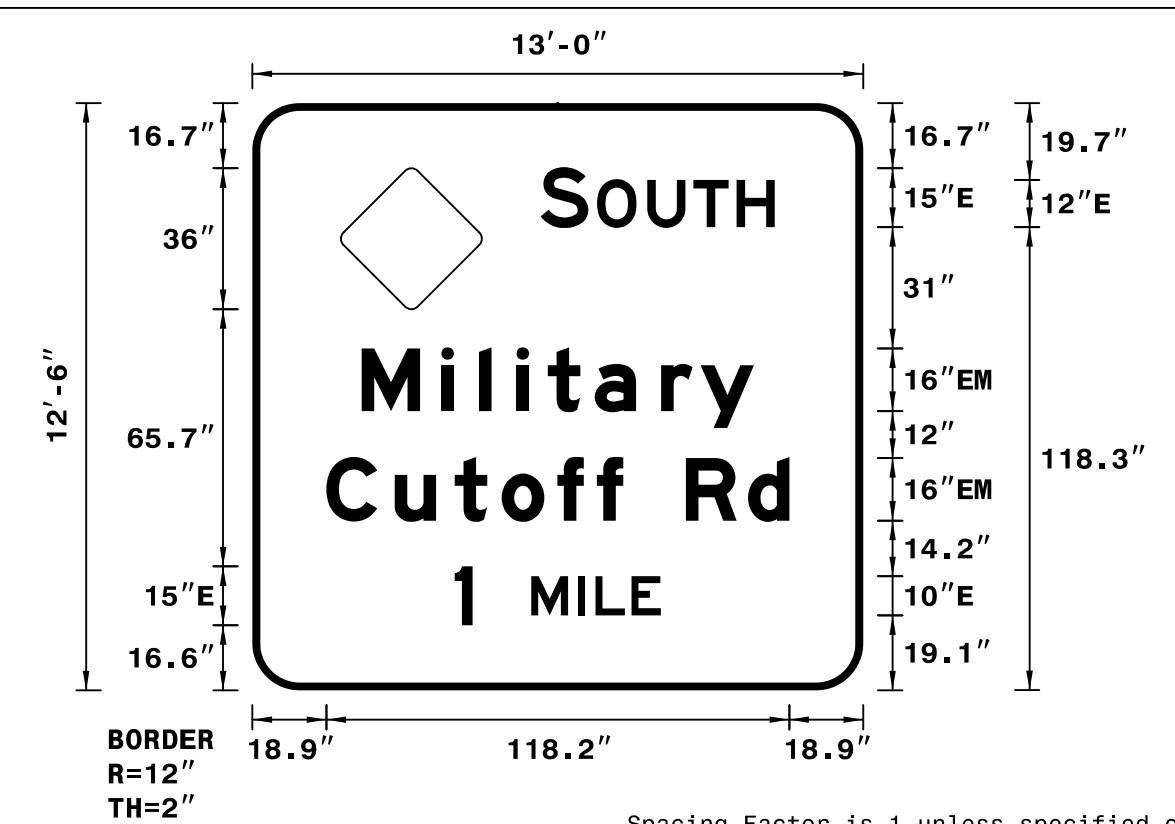

Spacing Factor is 1 unless specified otherwise


NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.  
 4. The North Carolina route number for the facility is to be determined and will be provided prior to sign fabrication.

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size Text Length
	S	O	U	T	H						E 2000
73.6	12.2	2.2	12.8	11.8	11	9.7	22.6				59.8
	M	I	L	I	T	A	R	Y			EM 2000
27.9	20.3	9.6	9.6	8	12	17	10.1	13.6	27.9		100.2
	C	U	T	O	F	F	R	D			EM 2000
18.9	17.4	15.4	12	14.2	10.1	6.7	16	15.8	10.6	18.9	118.2
	1	M	I	L	E						E 2000
51.7	4.5	15	12	4.4	9.2	7.5	51.7				52.6

SIGN NUMBER: 106B,111B BACKG COLOR: Green  
 TYPE: A COPY COLOR: White  
 QUANTITY: 2  
 SIGN WIDTH: 13'-0"  
 HEIGHT: 12'-6"  
 TOTAL AREA: 162.5 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 4  
 LENGTH: 148.0  
 MAT'L: 0.125" ALUMINUM

DESIGN BY: TRT CHECKED BY: ADK/CAJ  
 PROJECT ID: U-4751 DIV: 03 DATE: March 2017

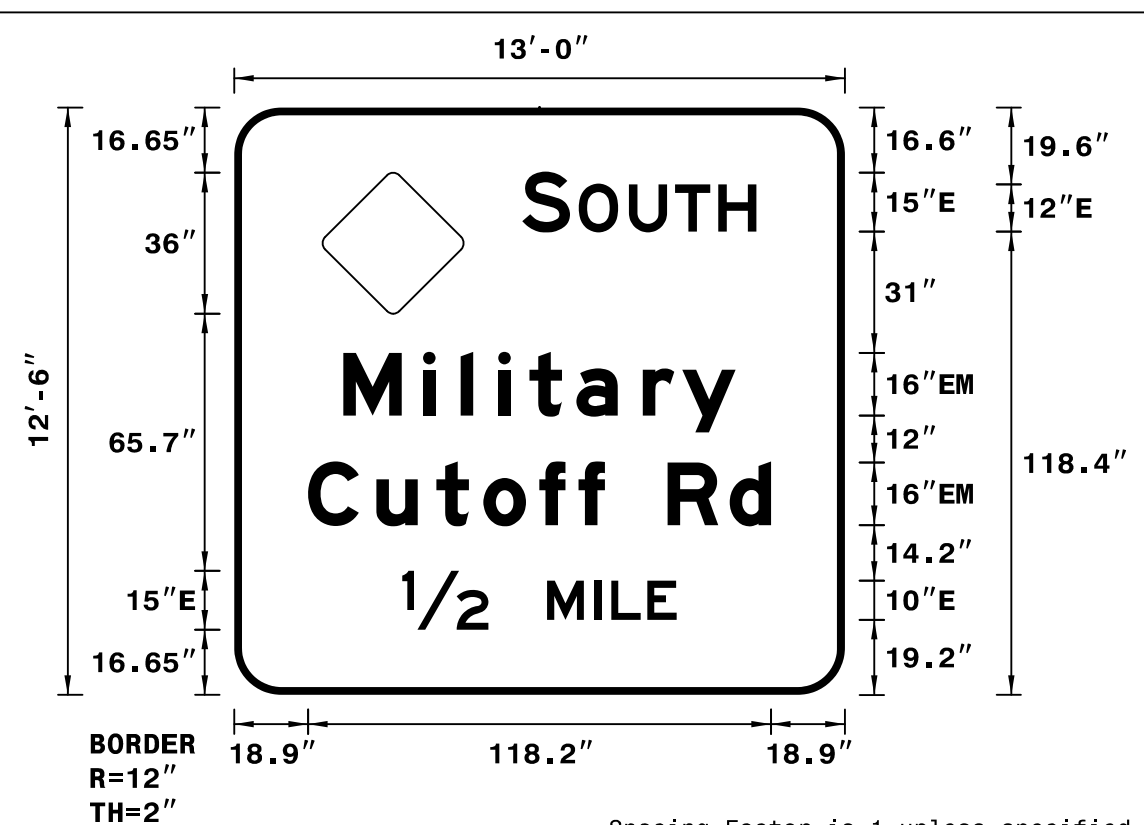

Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.  
 4. The North Carolina route number for the facility is to be determined and will be provided prior to sign fabrication.

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size Text Length
	S	O	U	T	H						E 2000
73.6	12.2	2.2	12.8	11.8	11	9.7	22.6				59.8
	M	I	L	I	T	A	R	Y			EM 2000
27.9	20.3	9.6	9.6	8	12	17	10.1	13.6	27.9		100.2
	C	U	T	O	F	F	R	D			EM 2000
18.9	17.4	15.4	12	14.2	10.1	6.7	16	15.8	10.6	18.9	118.2
	1/2	M	I	L	E						E 2000
43	22	15	12	4.4	9.2	7.5	43				70.1

SIGN NUMBER: 107,110 BACKG COLOR: Green  
 TYPE: A COPY COLOR: White  
 QUANTITY: 2  
 SIGN WIDTH: 19'-0"  
 HEIGHT: 5'-6"  
 TOTAL AREA: 104.5 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"  
 NO. Z BARS: 2  
 LENGTH: 220.0  
 MAT'L: 0.125" ALUMINUM

DESIGN BY: TRT CHECKED BY: ADK/CAJ  
 PROJECT ID: U-4751 DIV: 03 DATE: March 2017



Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend, border, and arrows shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. EXIT 23 designed for future EXIT 23A.

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size Text Length									
	W	R	I	G	H	T	S	V	I	L	L	E	B	E	A	C	H			EM 2000
13.8	17.3	9.8	6.8	14.1	12.8	9.7	11.4	14.1	8	8	6.8	8.8	13.3	13.3	11.7	12.9	12.9	8.8	13.8	200.4
	E	X	I	T																E 2000
66.6	8.9	10.7	3.5	7.5	15	14.2	12.2	89.4												72