

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.


NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASINS AS STILLING BASIN WHERE APPLICABLE.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 05

PROJECT REFERENCE NO. R-5749	SHEET NO. EC-0720ST05
ROW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

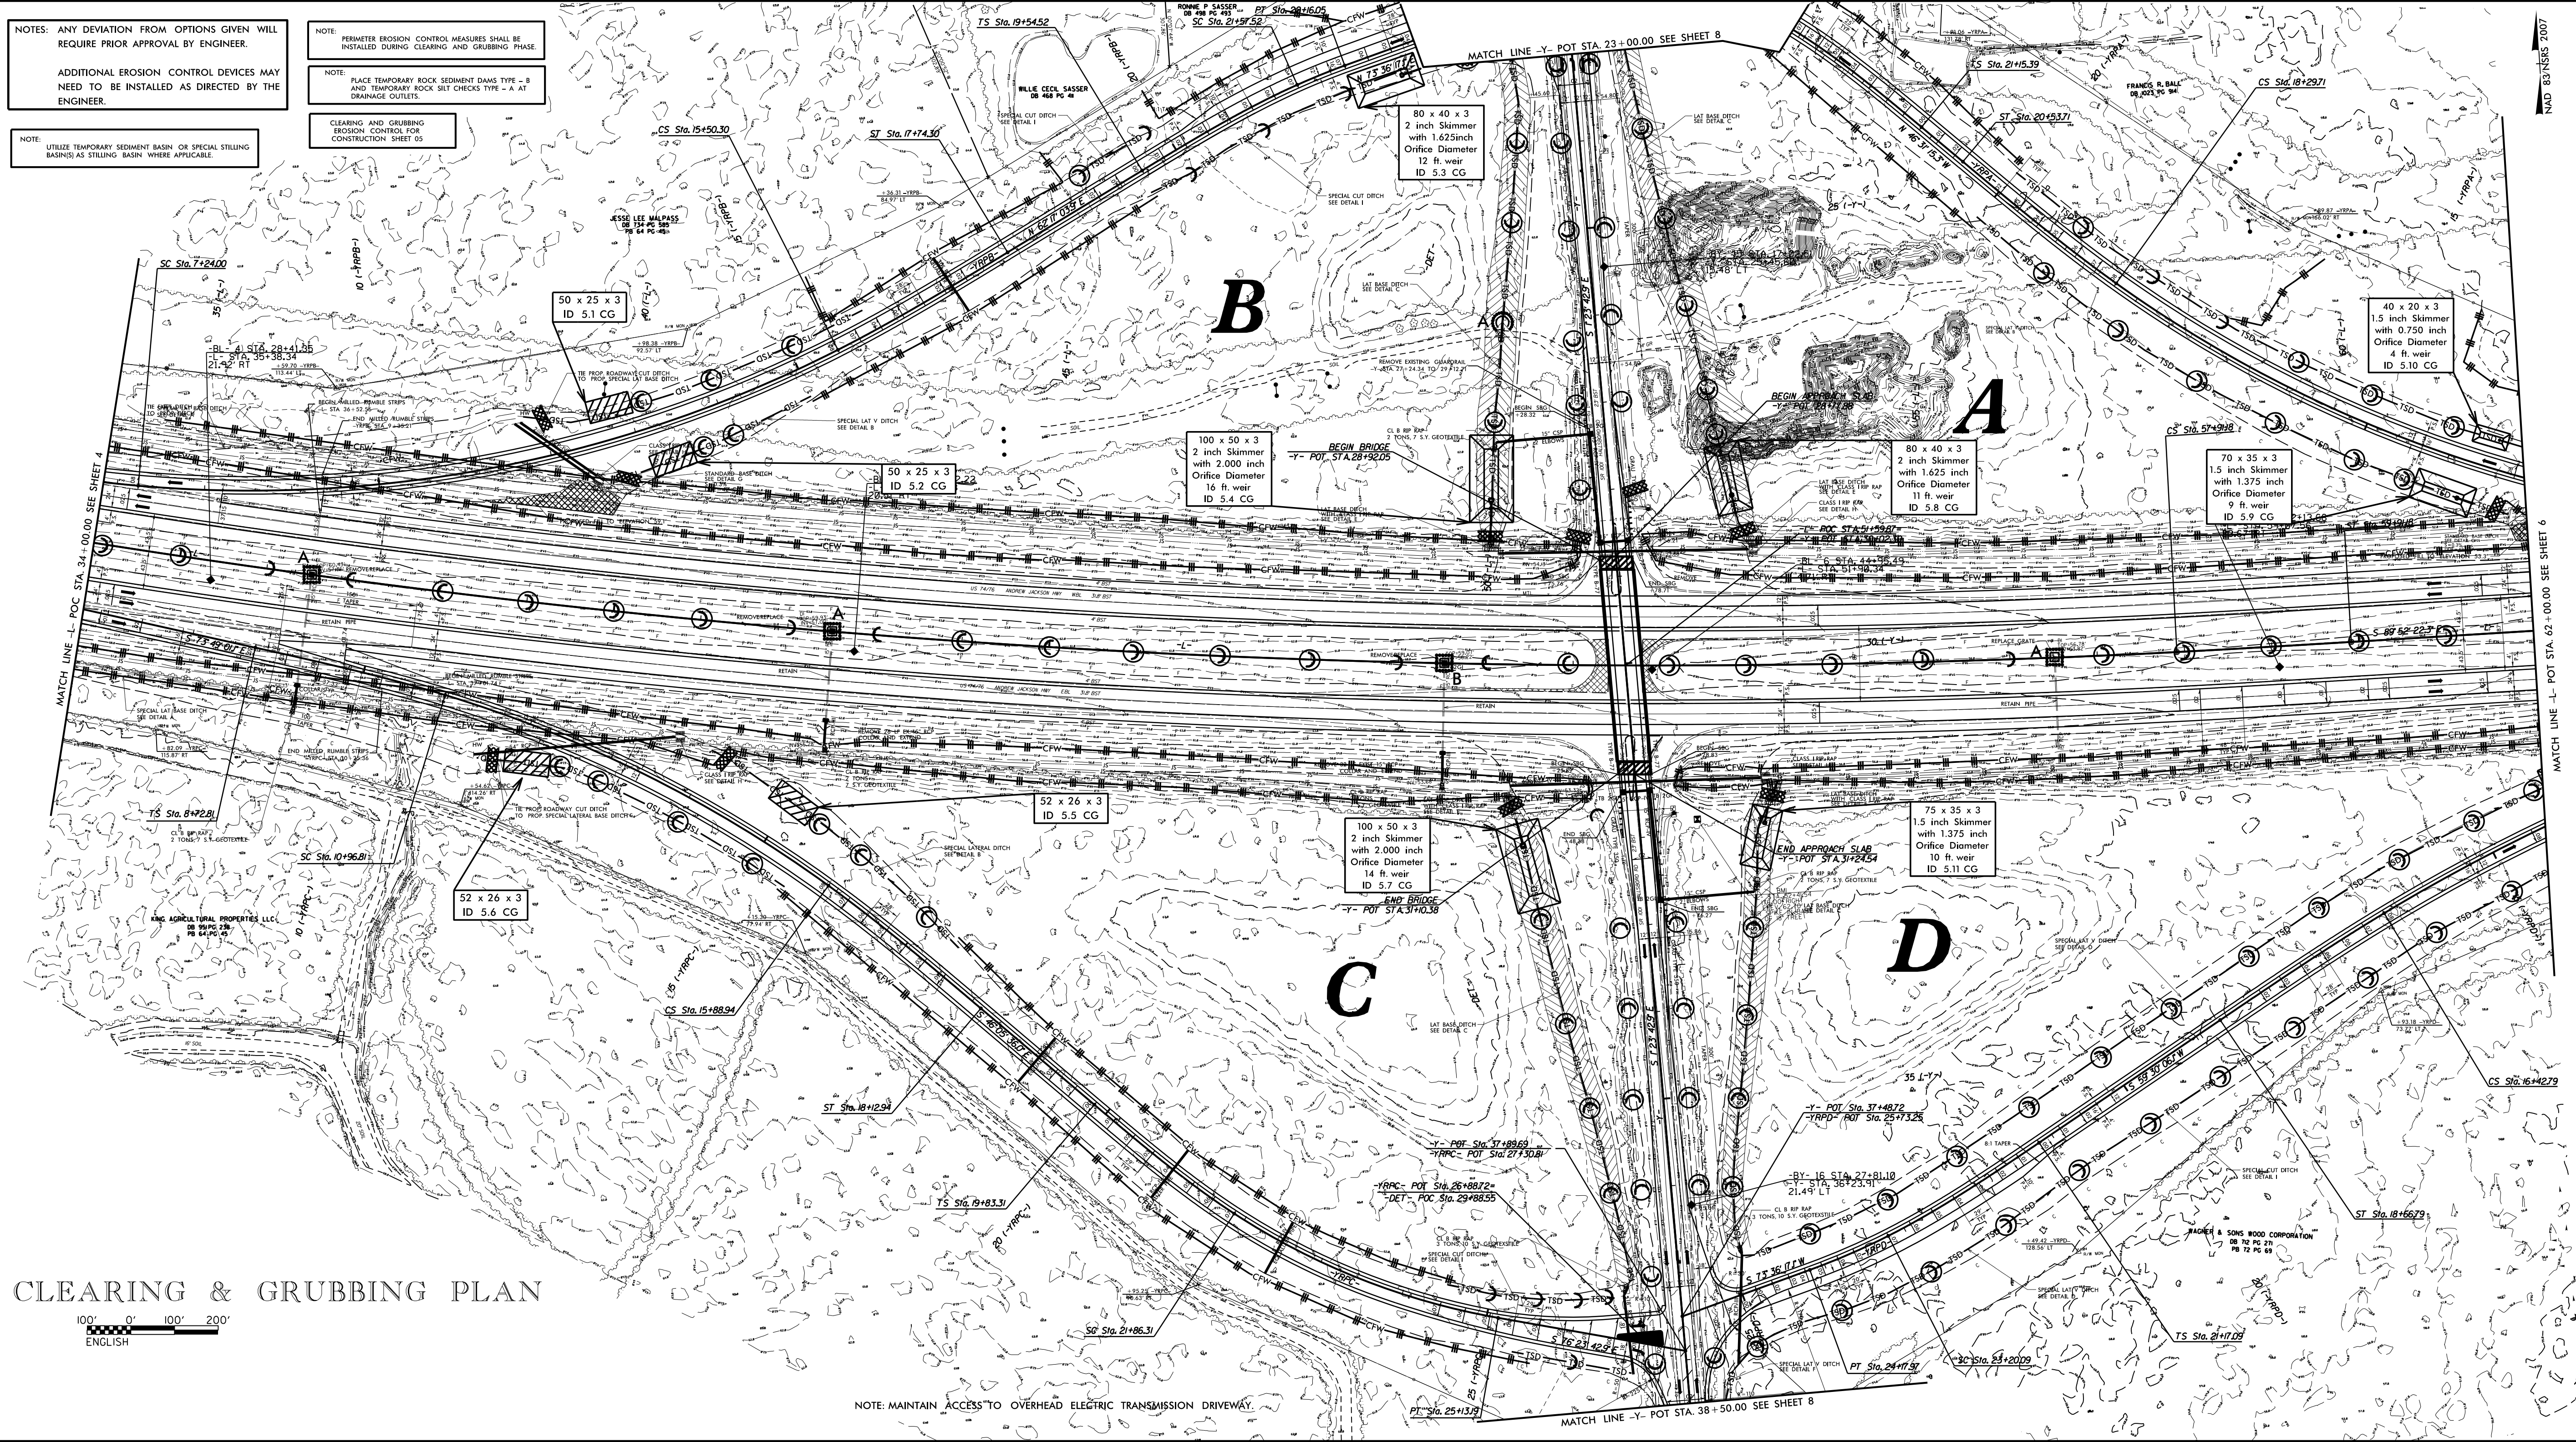

CLEARING & GRUBBING PLAN

100' 0 100' 200'  
ENGLISH

NOTE: MAINTAIN ACCESS TO OVERHEAD ELECTRIC TRANSMISSION DRIVEWAY.

MAD B3-NRS 2007

MATCH LINE -L- POT STA. 62+00.00 SEE SHEET 6

MATCH LINE -Y- POT STA. 38+50.00 SEE SHEET 8

MATCH LINE -L- POT STA. 34+00.00 SEE SHEET 4