

TEMPORARY PAVEMENT MARKINGS/MARKERS



SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
<u>TEMPORARY PAVEMENT MARKINGS</u>			
<u>COLD APPLIED PLASTIC, TYPE 4 (4") (REMOVABLE TAPE)</u>			
RA	WHITE EDGELINE	254 LF	
RC	10 FT. WHITE SKIP	58 LF	
RD	2 FT. WHITE MINISKIP	11 LF	
RE	WHITE SOLID LANE LINE	81 LF	
RI	YELLOW DOUBLE CENTER	508 LF	
		TOTAL	912 LF
<u>COLD APPLIED PLASTIC PAVEMENT MARKING SYMBOLS, TYPE 4 (REMOVEABLE TAPE)</u>			
SA	LEFT TURN ARROW	1 EA	
SC	STRAIGHT ARROW	4 EA	
		TOTAL	5 EA
<u>PAINT (4")</u>			
PA	WHITE EDGELINE	5,252 LF	
PC	10 FT. WHITE SKIP	548 LF	
PD	2 FT. WHITE MINISKIP	141 LF	
PE	WHITE SOLID LANE LINE	38 LF	
PF	10 FT. YELLOW SKIP	314 LF	
PH	YELLOW SINGLE CENTER	1,256 LF	
PI	YELLOW DOUBLE CENTER	10,576 LF	
		TOTAL	18,125 LF
<u>PAINT (8")</u>			
PV	YELLOW DIAGONAL	212 LF	
		TOTAL	212 LF
<u>PAINT (24")</u>			
P4	WHITE STOPBAR	242 LF	
		TOTAL	242 LF
<u>PAINT MARKING SYMBOLS</u>			
QA	LEFT TURN ARROW	10 EA	
QC	STRAIGHT ARROW	10 EA	
QE	COMBO. STRAIGHT/RIGHT	4 EA	
		TOTAL	24 EA
<u>MARKERS</u>			
<u>TEMPORARY RAISED PAVEMENT MARKERS</u>			
MH	YELLOW & YELLOW	86 EA	
MI	CRYSTAL & RED	37 EA	
MK	CRYSTAL & CRYSTAL	193 EA	
		TOTAL	316 EA

FINAL PAVEMENT MARKINGS/MARKERS

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
<u>FINAL PAVEMENT MARKINGS</u>			
<u>POLYUREA (4", 20MLS)</u>			
VC	10 FT. WHITE SKIP	333 LF	
VD	2 FT. WHITE MINISKIP	59 LF	
VE	WHITE SOLID LANE LINE	100 LF	
VF	10 FT. YELLOW SKIP	157 LF	
VH	YELLOW SINGLE CENTER	628 LF	
VI	YELLOW DOUBLE CENTER	2,068 LF	
		TOTAL	3,345 LF
<u>POLYUREA (8", 20MLS)</u>			
VT	YELLOW DIAGONAL	106 LF	
VV	WHITE CROSSWALK LINE	126 LF	
		TOTAL	232 LF
<u>POLYUREA (24" 20MILS)</u>			
V2	WHITE STOPBAR	74 LF	
		TOTAL	74 LF
<u>POLYUREA PAVEMENT MARKING SYMBOL</u>			
WA	LEFT TURN ARROW	6 EA	
WC	STRAIGHT ARROW	9 EA	
WE	COMBO STRAIGHT/RIGHT	2 EA	
		TOTAL	17 EA
<u>MARKERS</u>			
<u>PERMANENT RAISED PAVEMENT MARKERS</u>			
MA	YELLOW & YELLOW	36 EA	
MB	CRYSTAL & RED	37 EA	
		TOTAL	73 EA

16-MAY-2006 10:36
 \\efs-ccf-503\B3337\tr\affia\tr\affiocontrol\top\newalignment\b-3337_top-top-1.dgn
 kbroadwell AT WZTC224240

APPROVED:	DATE: 5/6/06	PAVEMENT MARKING SCHEDULE					
	SCALE: NONE						
	DATE: 5/06	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">REVISIONS</th> </tr> <tr> <td> </td> </tr> <tr> <td> </td> </tr> <tr> <td> </td> </tr> </table>		REVISIONS			
	REVISIONS						
DWG. BY: KPB	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">DESIGN BY: KPB</td> <td style="width: 50%;">REVIEWED BY: JWG</td> </tr> </table>		DESIGN BY: KPB	REVIEWED BY: JWG			
DESIGN BY: KPB	REVIEWED BY: JWG						
DESIGN BY: KPB	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">REVIEWED BY: JWG</td> <td style="width: 50%;">CAD FILE</td> </tr> </table>		REVIEWED BY: JWG	CAD FILE			
REVIEWED BY: JWG	CAD FILE						

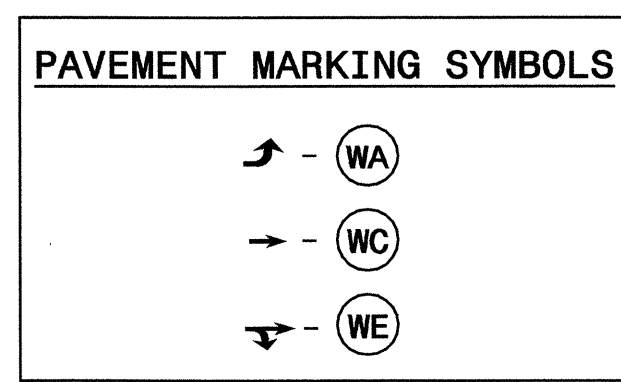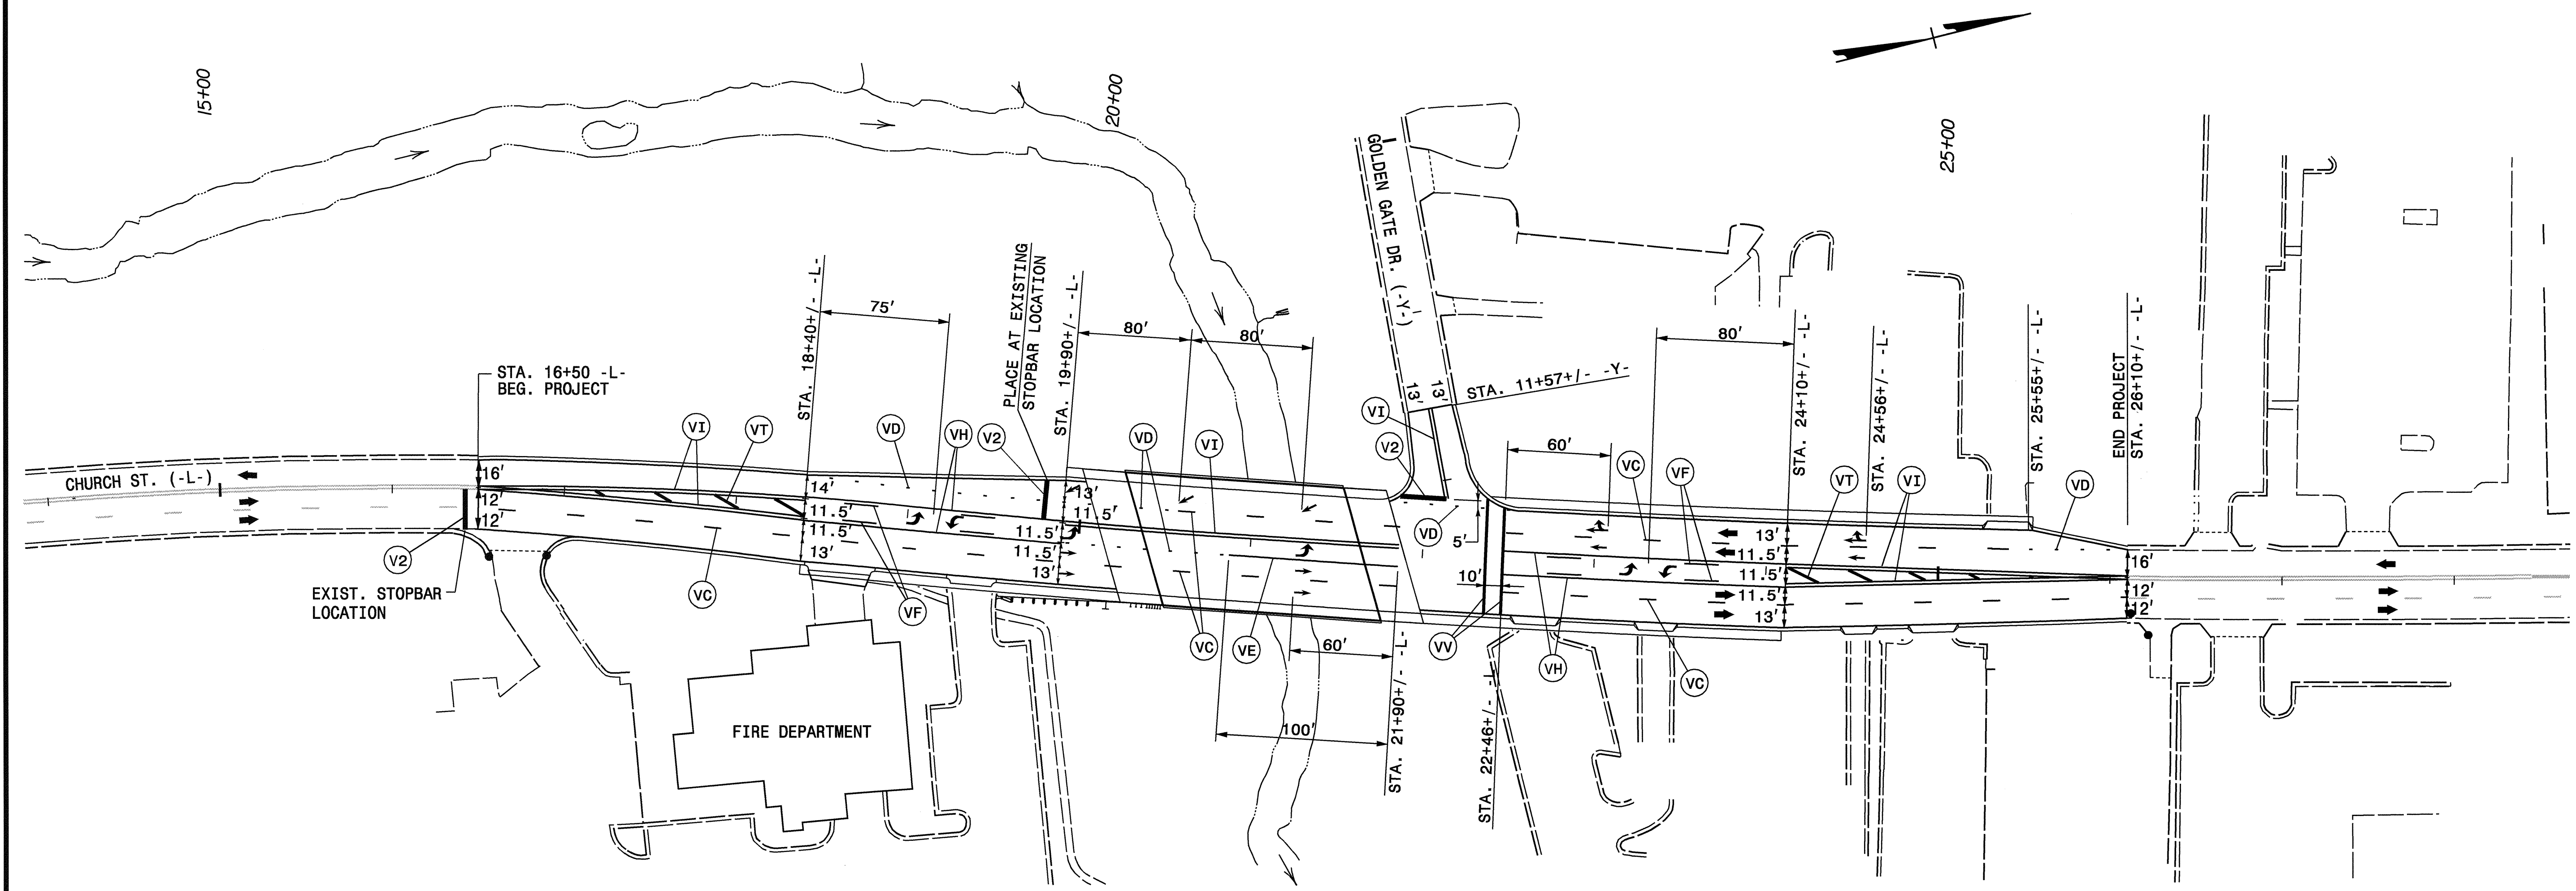

NOTES:

1. SEE SHEET NUMBER PM-1 FOR PAVEMENT MARKING SCHEDULE.
2. SEE ROADWAY STANDARD DRAWING NUMBERS 1250.01 AND 1251.01 FOR PAVEMENT MARKER SPACING AND RAISED PAVEMENT MARKERS.
3. SEE ROADWAY STANDARD DRAWING NUMBER 1205.07 FOR PEDESTRIAN CROSSWALK.

APPROVED: _____	DATE: 5/5/07	PAVEMENT MARKING PLAN	
		DATE: 5/06	REVISIONS
DWG. BY: KPB			
DESIGN BY: KPB			
REVIEWED BY: JWG			

15-AUG-2007 12:05
 \\dot\dfsroot\proj\TIP\Projects-B\B3337\Traffic\TrafficControl\top\newalignment\b-3337_top_pmp.dgn
 idonalson AT WZTC21231