

6/2/2018

FINAL PAVEMENT SCHEDULE





C1	PROP. APPROX. 2.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1.25" IN DEPTH OR GREATER THAN 2" IN DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J	PROP. 6" AGGREGATE BASE COURSE.
R1	SHOULDER BERM GUTTER
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	INCIDENTAL MILLING
V1	VARIABLE DEPTH MILLING, 0" TO 2.0"
W	WEDGING (SEE DETAIL THIS SHEET).

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

wsp
 434 Fayetteville Street Suite 1500
 Raleigh, NC 27601 - 919.836.4040
 www.wspgroup.com
 LICENSE NO. F-0891

PROJECT REFERENCE NO. B-5320	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER SEAL 043139 HOLLY CHRISTENBURY	PAVEMENT DESIGN ENGINEER SEAL 022896 CLARK MORRISON

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

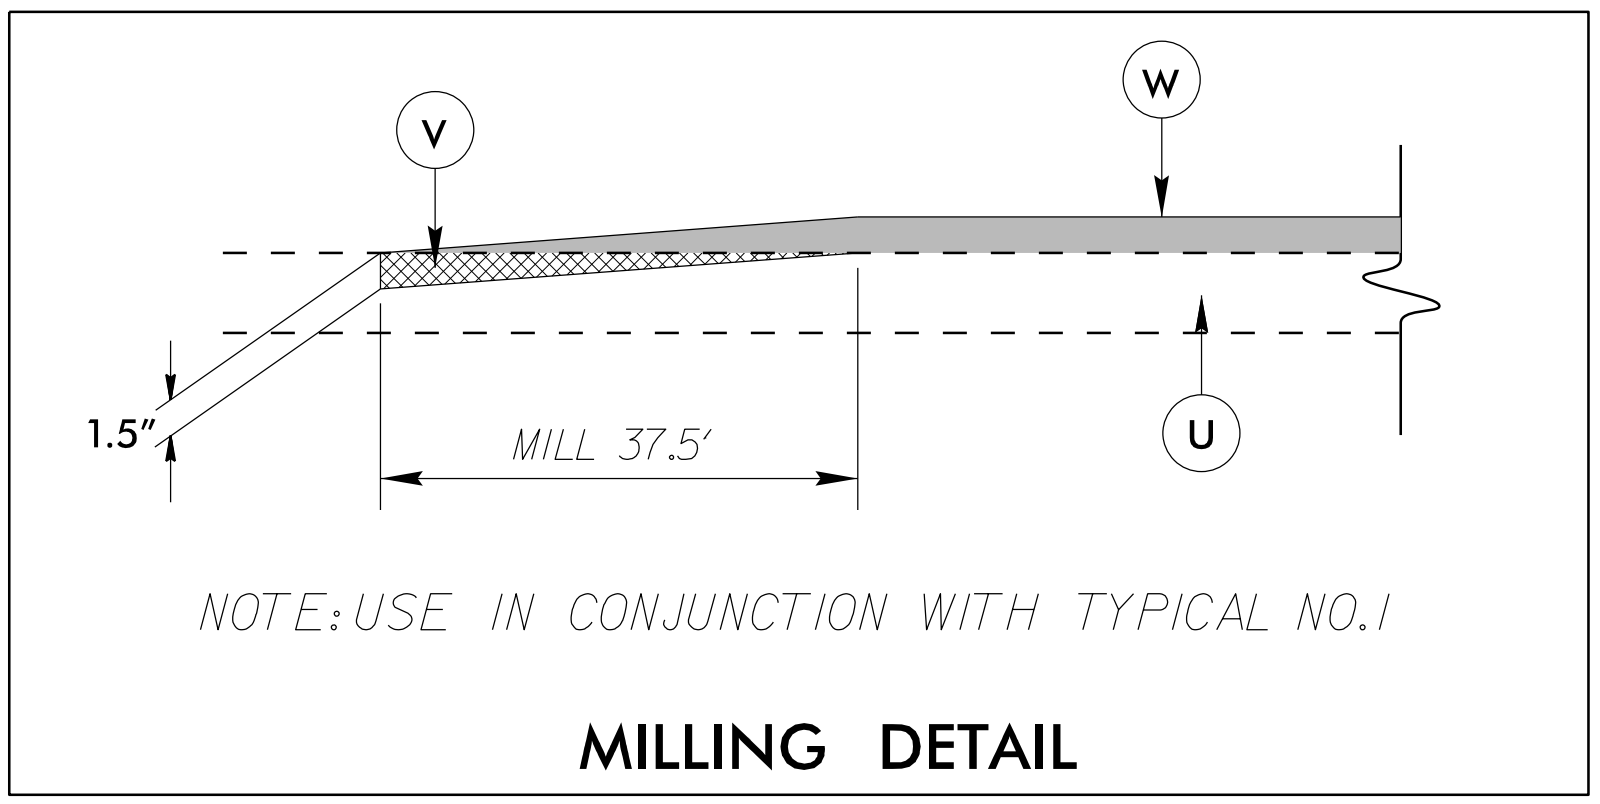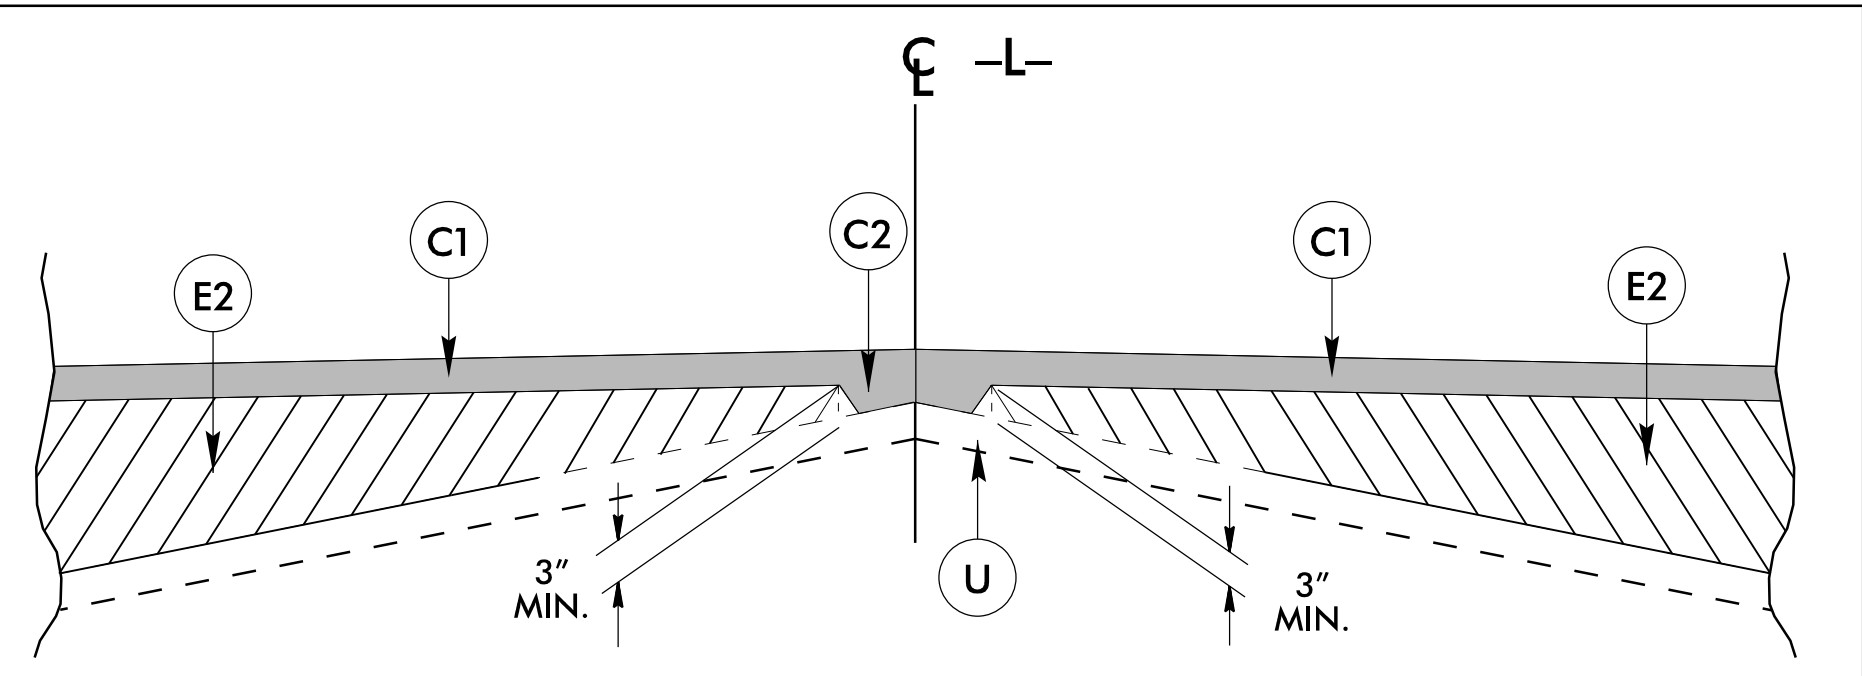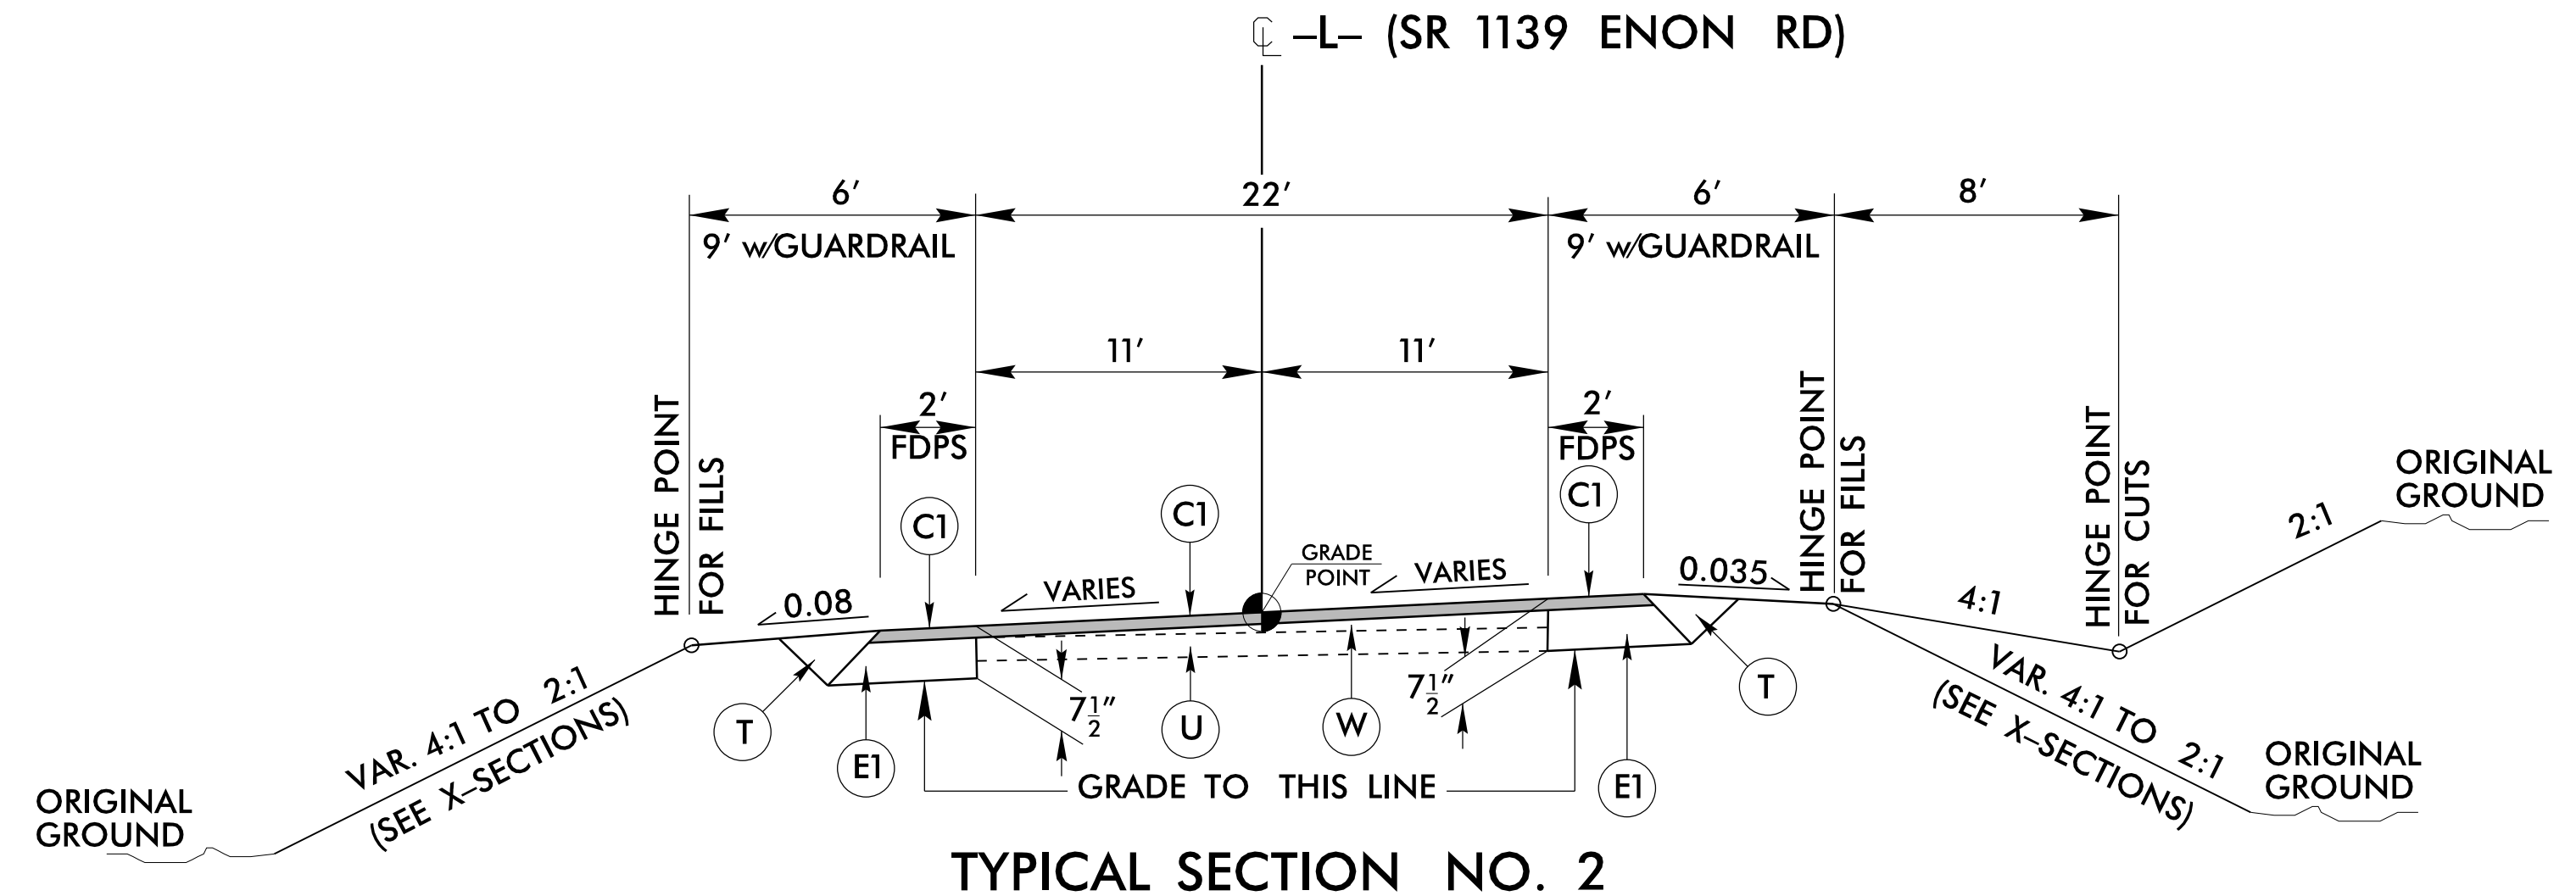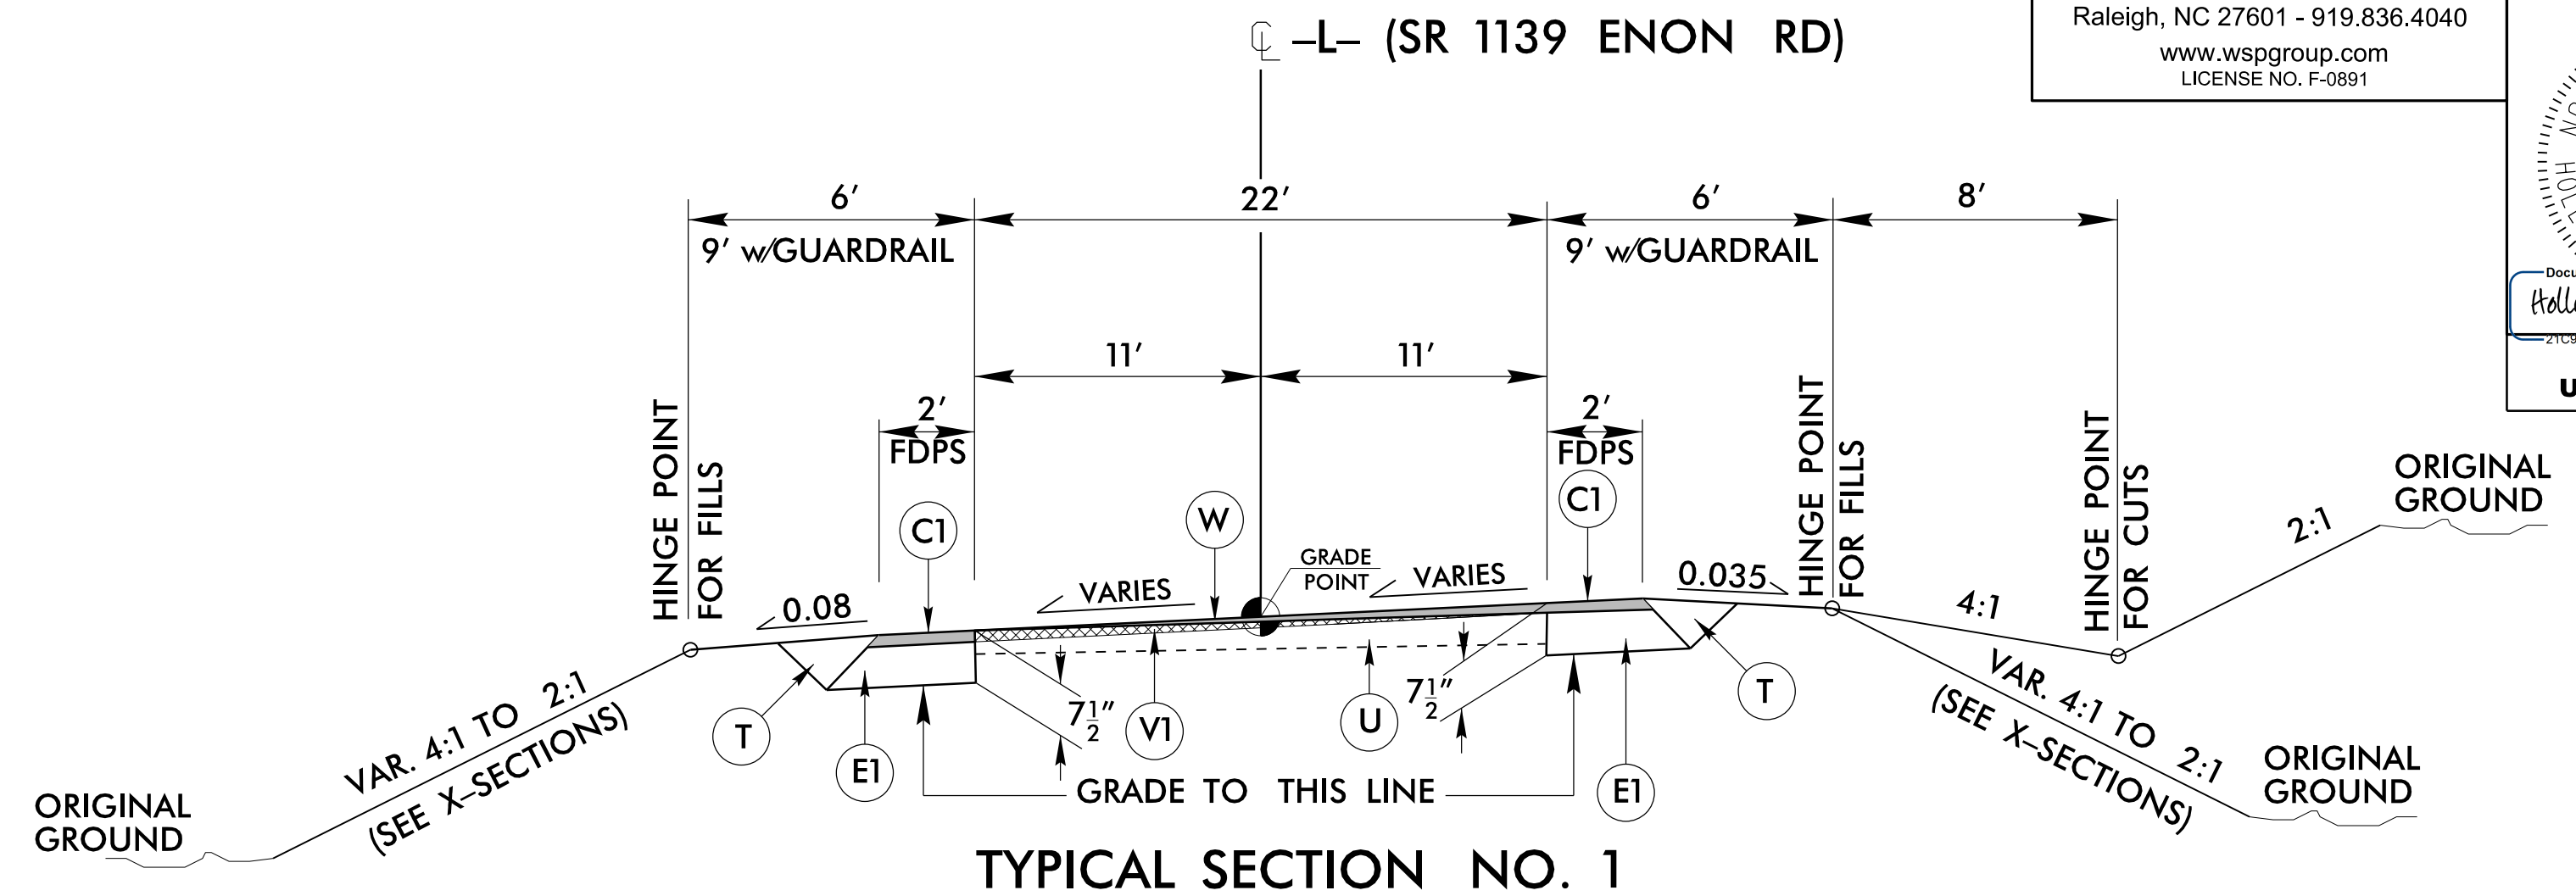

6/14/2018
 R:\Projects\B5320\Proj\B5320_2A-1.dgn
 11:54:02 AM