

6/2/2018


FINAL PAVEMENT SCHEDULE

C1	PROP. APPROX. 2.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1.25" IN DEPTH OR GREATER THAN 2" IN DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J	PROP. 6" AGGREGATE BASE COURSE.
R1	SHOULDER BERM GUTTER
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	INCIDENTAL MILLING
V1	VARIABLE DEPTH MILLING, 0" TO 2.0"
W	WEDGING (SEE DETAIL THIS SHEET).


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

wsp
 434 Fayetteville Street Suite 1500
 Raleigh, NC 27601 - 919.836.4040
 www.wspgroup.com
 LICENSE NO. F-0891


PROJECT REFERENCE NO. B-5320	SHEET NO. 2A-2
ROADWAY DESIGN ENGINEER Holly Christenbury SEAL 043139 EXPIRES 12/31/2018	PAVEMENT DESIGN ENGINEER Clark Morrison SEAL 022896 EXPIRES 12/31/2018
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

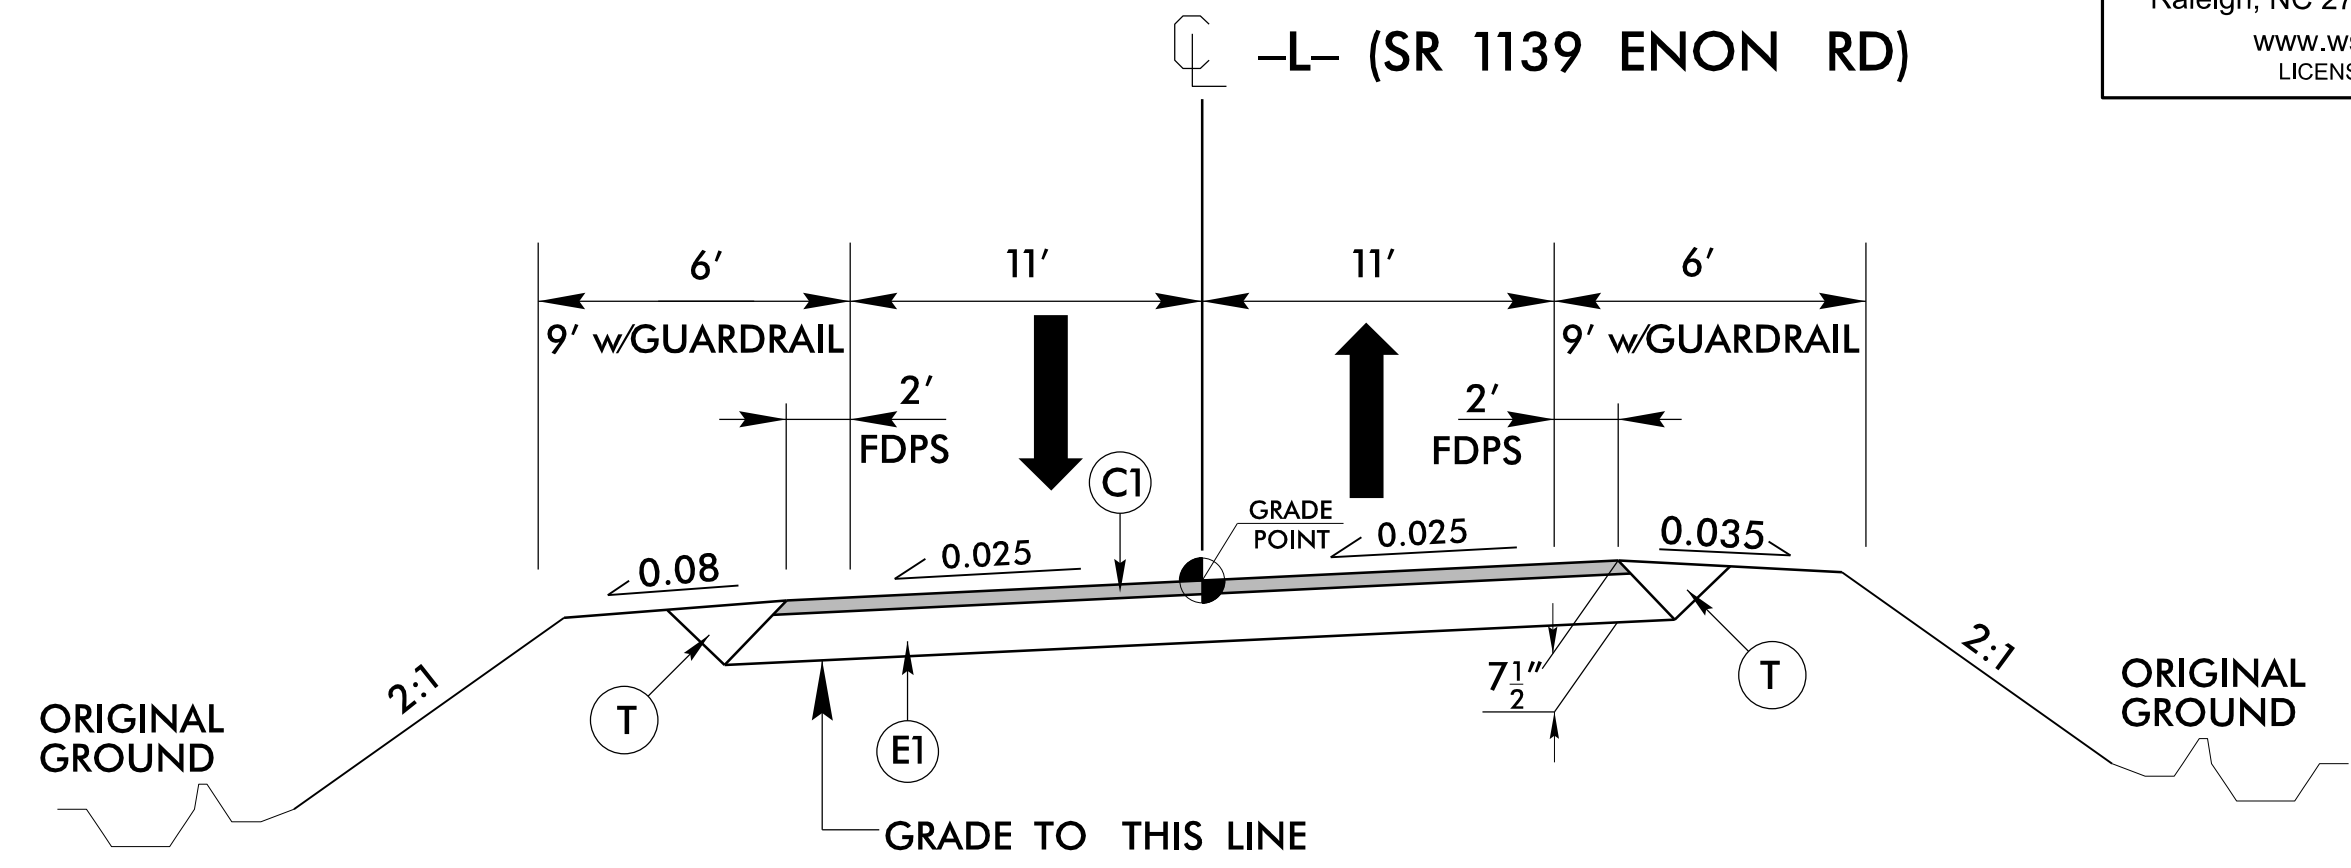

TYPICAL SECTION NO. 3
 IN CONJUNCTION WITH DETAIL A
 -L- STA 14+40.00 TO 14+91.56 (BEGIN BRIDGE)
 -L- STA 17+04.44 (END BRIDGE) TO 17+55.00

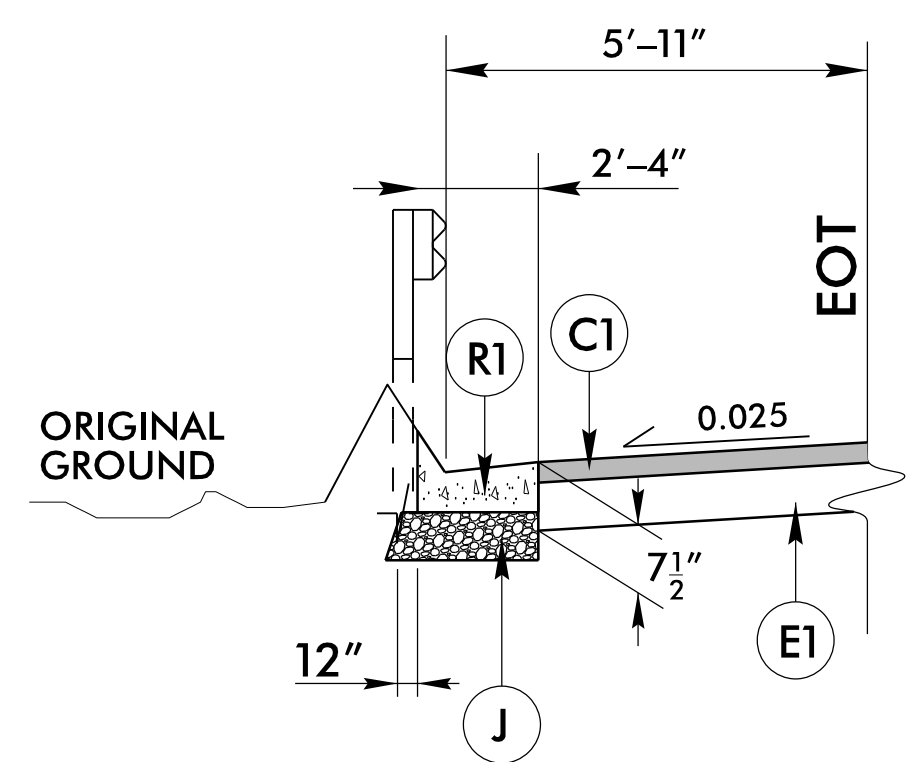

DETAIL A
 SHOULDER BERM GUTTER
 -L- STA. 17+23.65 TO 17+55.00 (LT)
 NOTE: USE IN CONJUNCTION WITH TYPICAL NO. 3

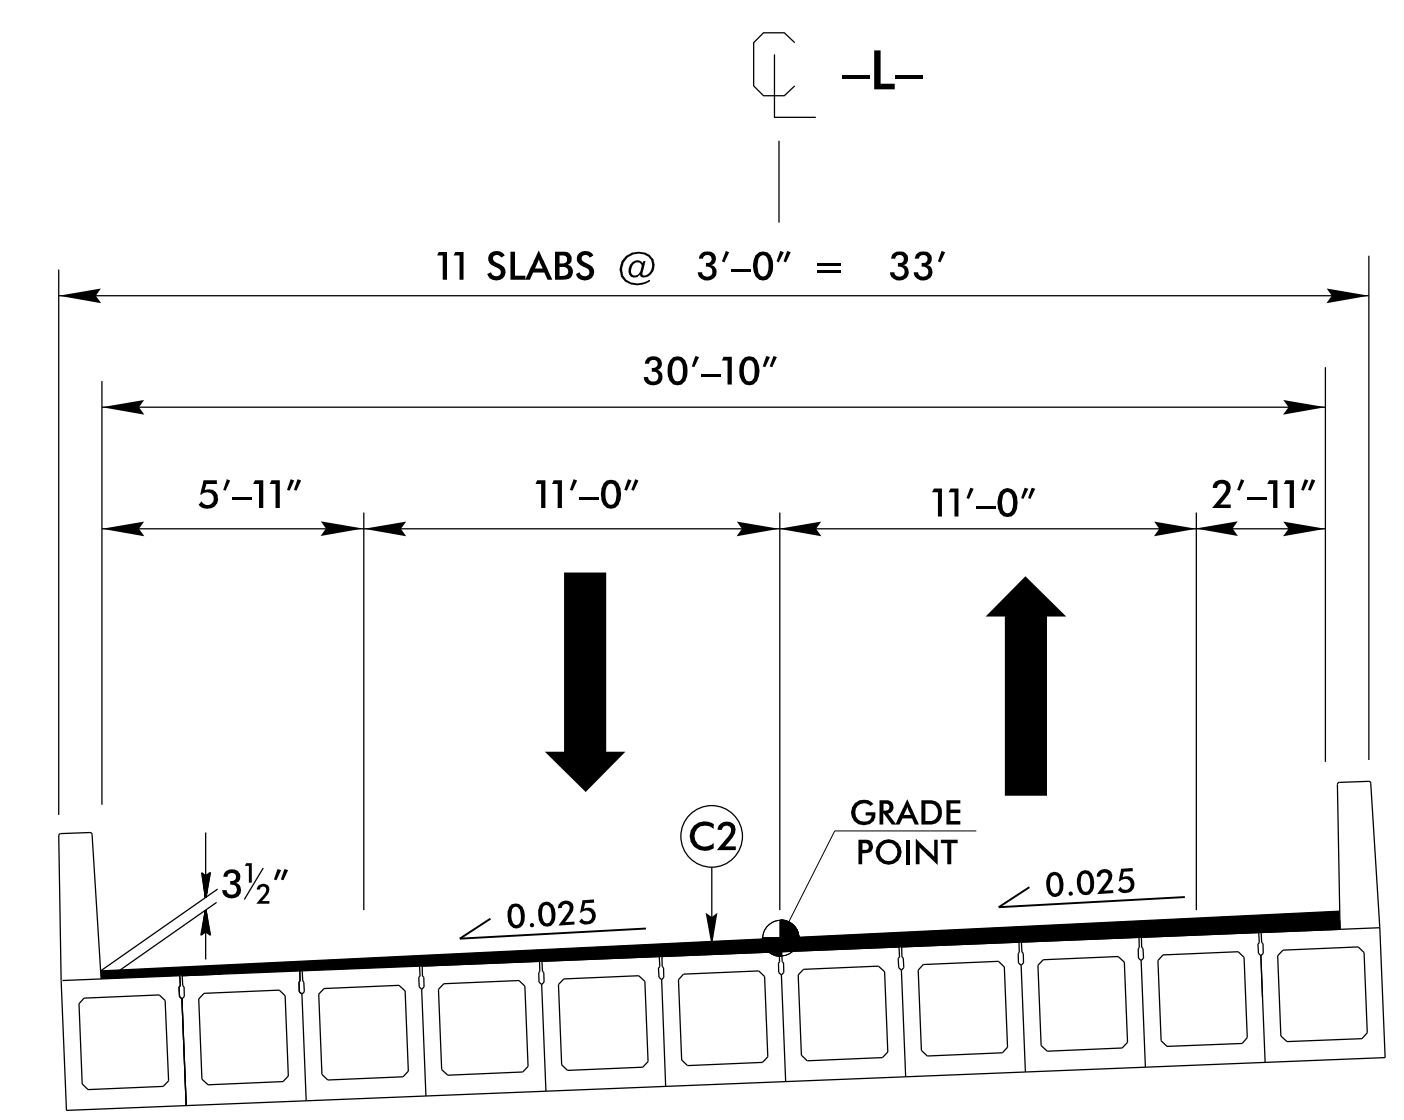

TYPICAL SECTION NO. 4
 -L- STA. 14+91.56 (BEGIN BRIDGE)
 TO STA. 17+04.44 (END BRIDGE)

R:\4\2018\1544024\Proj\B5320_1\Rel\typ.dgn
 1544024.dwg
 6/2/2018 10:47:04 AM