

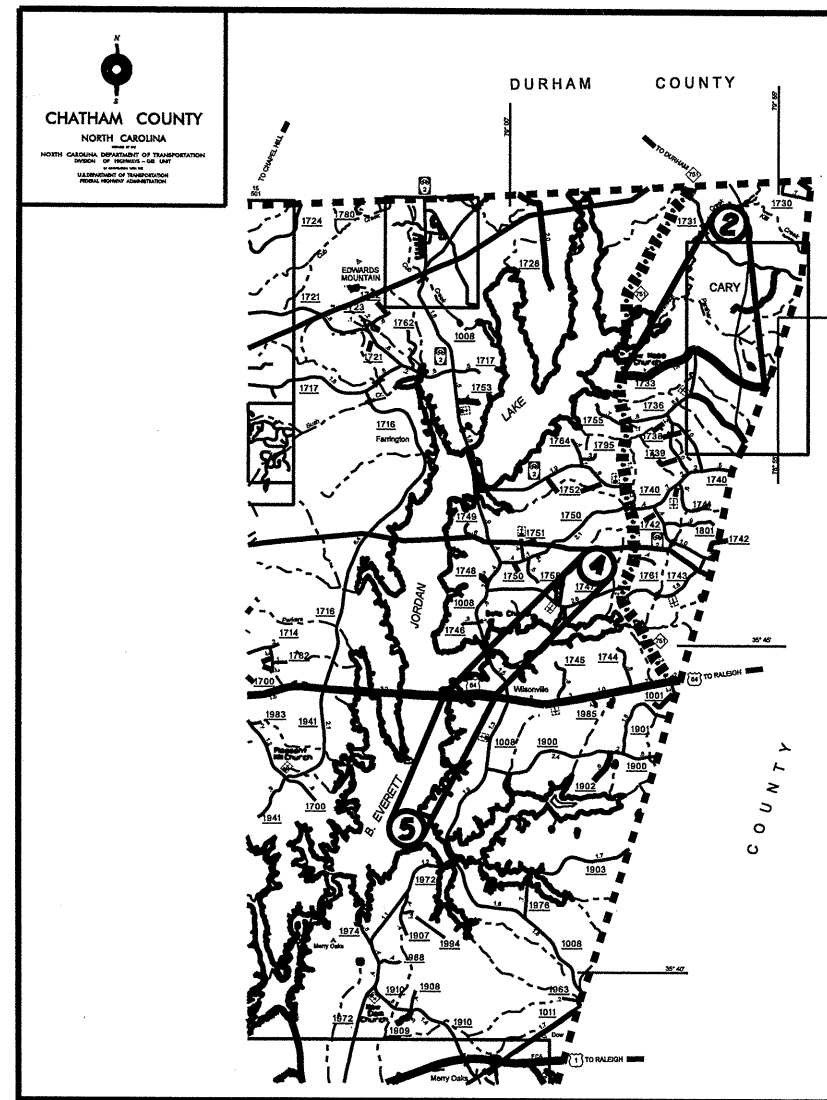
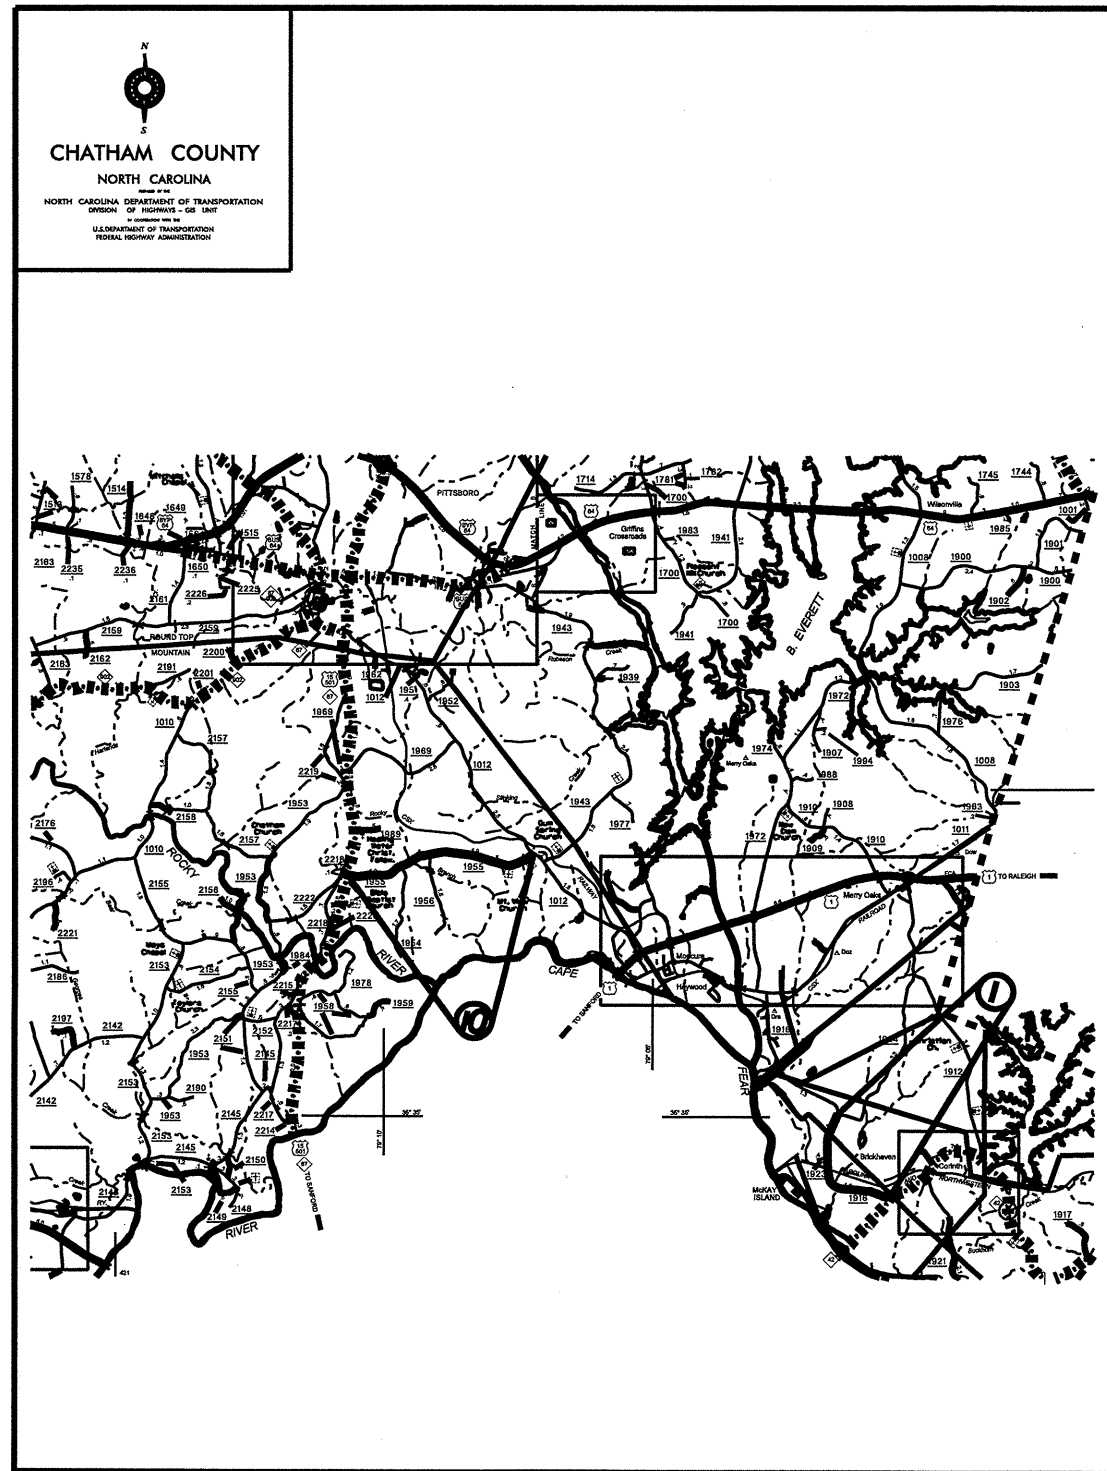


C 201945
SHEET 1

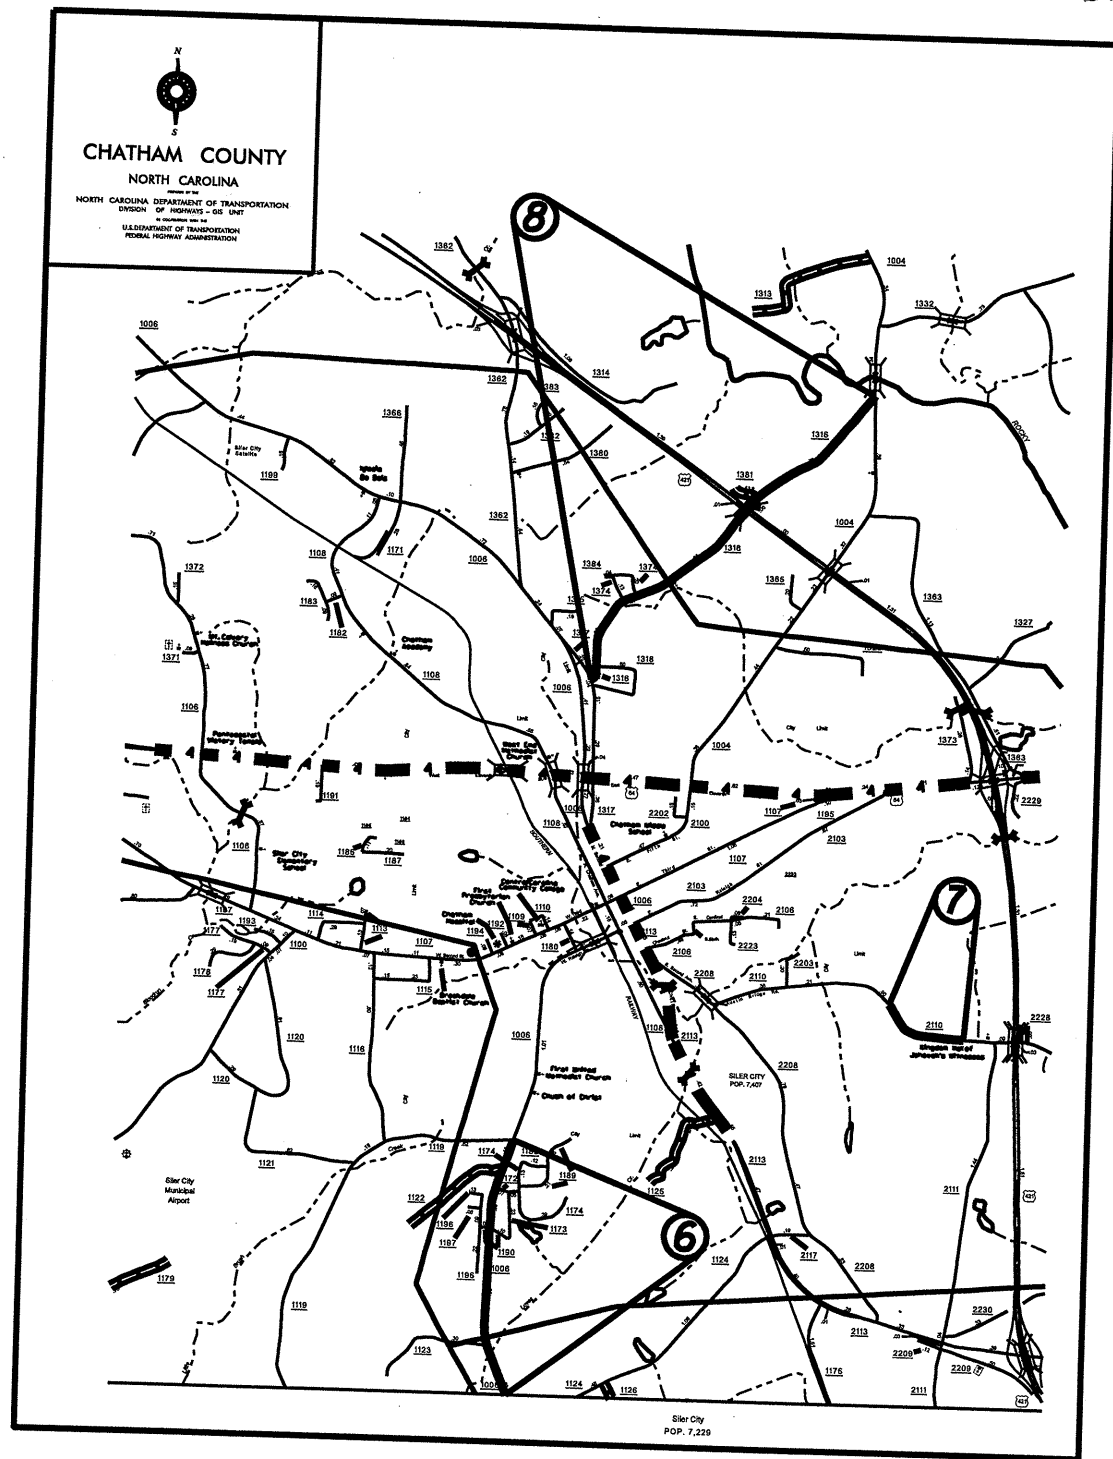

SYSTEMS






040397

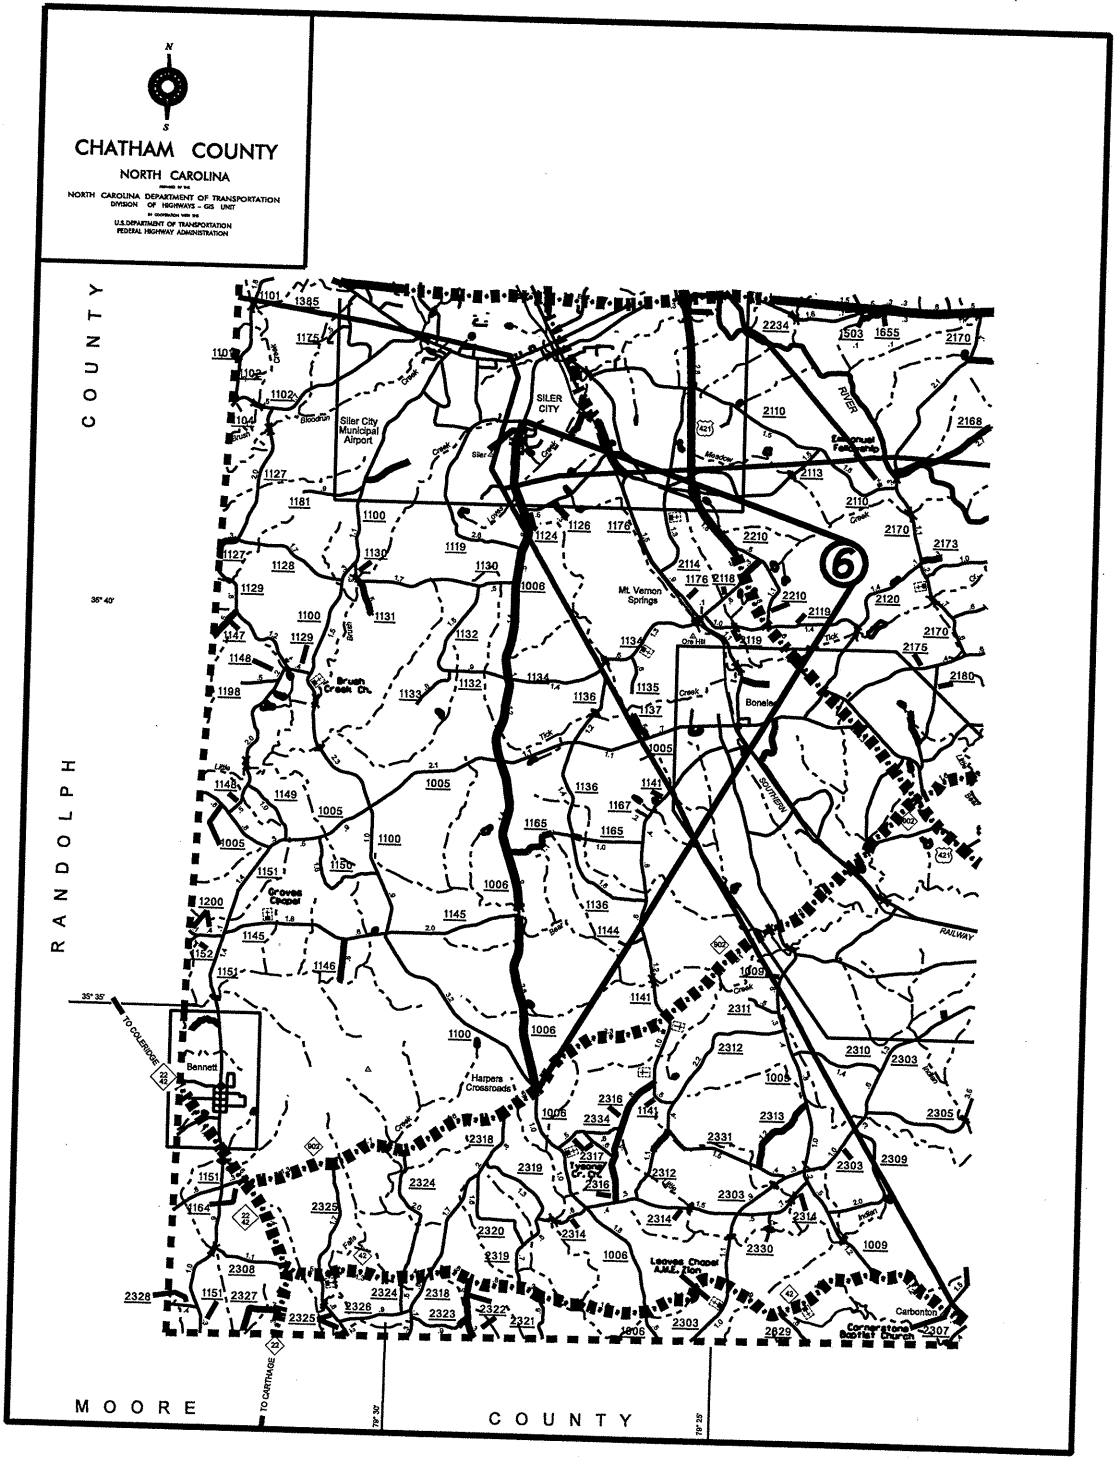

***** SYSTEMS TIME *****

040397

SHEET 4

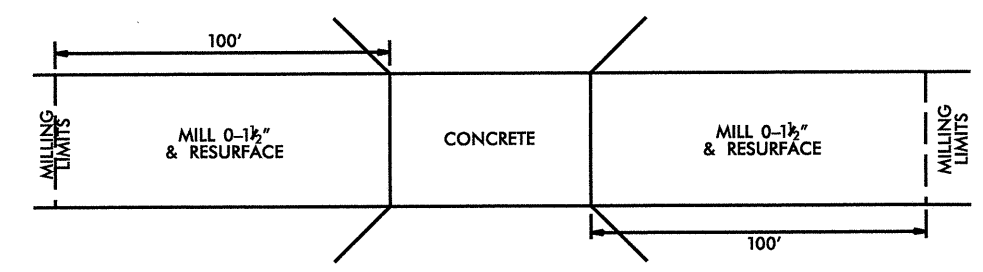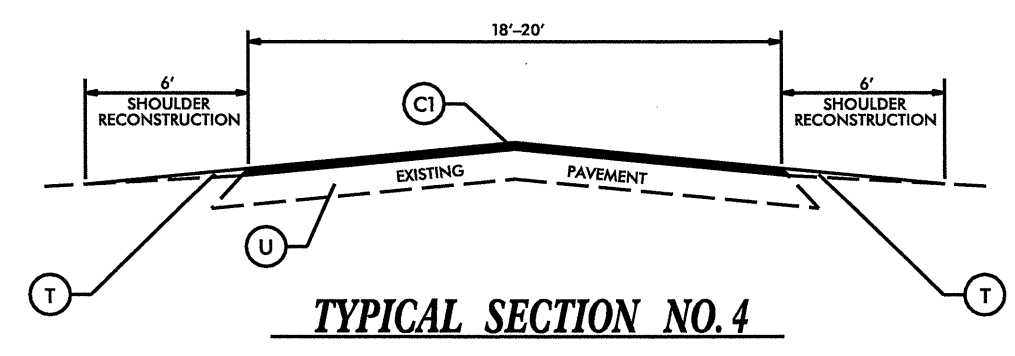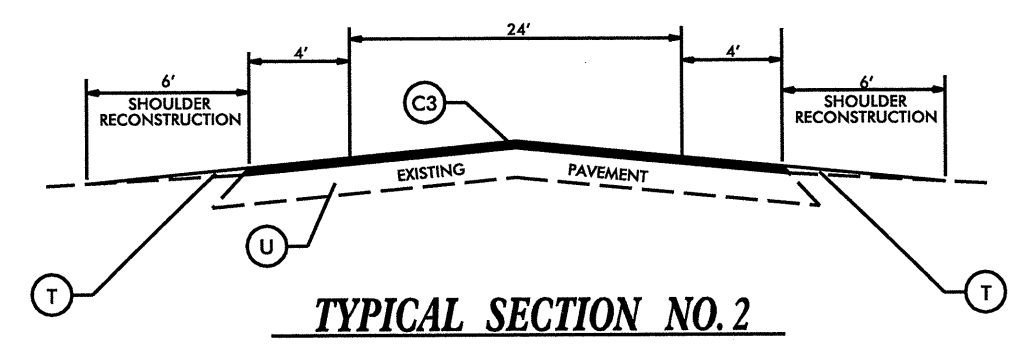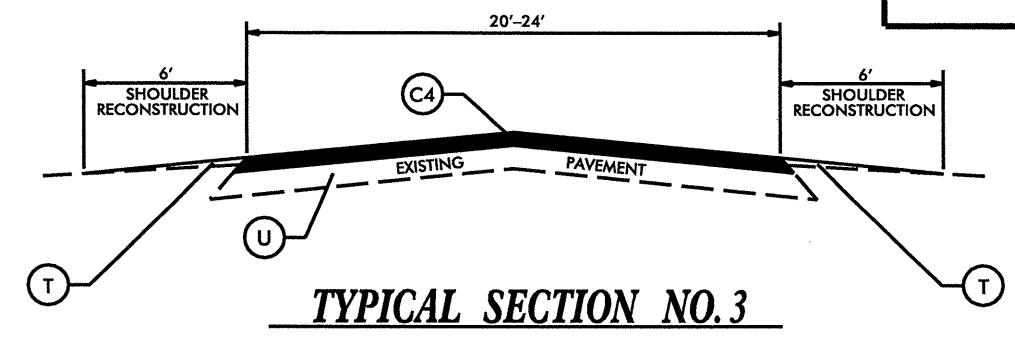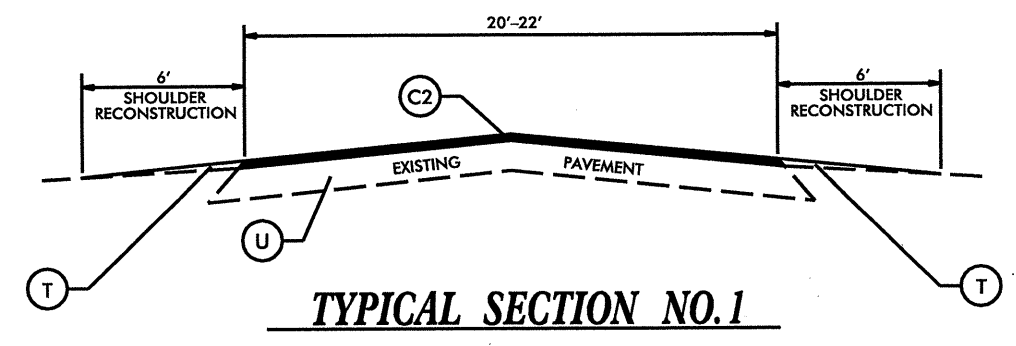

* MILLING SHALL BE PAID FOR UNDER INCIDENTAL MILLING

| PAVEMENT SCHEDULE | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| C1 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| C2 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C3 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C4 | PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. |
| T | EARTH MATERIAL. |
| U | EXISTING PAVEMENT. |

| | | |
|-------------------------------------------|-----------|-----------|
| PROJECT NO. | SHEET NO. | TOTAL NO. |
| 8C.019088, 8C.019089 8CR.10191.8, ETC. | 5 | |

SUMMARY OF QUANTITIES

| PROJECT NO | COUNTY | MAP NO | ROUTE | DESCRIPTION | TYP NO | LENGTH MI | WIDTH FT | INCIDENTAL STONE BASE TONS | SHOULDER RECONSTRUCTION SMI | INCIDENTAL MILLING SY | SURFACE COURSE, SF9.5A TONS | SURFACE COURSE, S9.5B TONS | SURFACE COURSE, S9.5C TONS | PG 64-22 PLANT MIX TONS | PG 70-22 PLANT MIX TONS | PATCHING EXISTING PAVEMENT TONS | SEED & MULCHING AC |
|---------------------------------------|---------|--------|----------|------------------------------------------------------------|--------|--------------|----------|----------------------------|-----------------------------|-----------------------|-----------------------------|----------------------------|----------------------------|-------------------------|-------------------------|---------------------------------|--------------------|
| 8C.019088 | Chatham | 1 | SR 1916 | FROM SR 1924 TO NC 42 | 3 | 2.35 | 24 | 106 | 4.7 | 533 | | 5,900 | | 354 | | 200 | 2.82 |
| TOTAL FOR PROJ NO. 8C.019088 | | | | | | 2.35 | | 106 | 4.7 | 533 | | 5,900 | | 354 | | 200 | 2.82 |
| 8C.019089 | Chatham | 2 | SR 1733 | FROM NC 751 TO WAKE CO. LINE | 3 | 2.91 | 20 | 58 | 11.64 | 100 | | 6,100 | | 366 | | 300 | 3.49 |
| TOTAL FOR PROJ NO. 8C.019089 | | | | | | 2.91 | | 58 | 11.64 | 100 | | 6,100 | | 366 | | 300 | 3.49 |
| 8CR.10191.8 | Chatham | 3 | NC 902 | FROM SR 1010 TO NC 87 | 1 | 2.43 | 20 | 49 | 4.86 | 100 | | 2,530 | | 152 | | 400 | 2.92 |
| | | 4 | US 64 WB | FROM CONST. JOINT 0.61 MI. W. OF SR 1008 TO BRIDGE #59 | 2 | 0.71 | 32 | | 1.42 | 356 | | | 1,300 | | 78 | 100 | 0.99 |
| | | 5 | US 64 EB | FROM BRIDGE #58 TO CONST JT 0.61 MI W. SR 1008 | 2 | 0.69 | 32 | | 1.38 | 356 | | | 1,265 | | 76 | 100 | 0.97 |
| TOTAL FOR PROJ NO. 8CR.10191.8 | | | | | | 3.83 | | 49 | 7.66 | 812 | | 2,530 | 2,565 | 152 | 154 | 600 | 4.88 |
| 8CR.20191.8 | Chatham | 6 | SR 1006 | FROM SCL SILER CITY TO NC 902 | 1 | 9.93 | 22 | 199 | 19.86 | 100 | | 11,370 | | 682 | | 1,100 | 11.92 |
| | | 7 | SR 2110 | FROM 24' PAVEMENT WIDENING TO PAVEMENT JOINT PONY FARM RD. | 4 | 0.45 | 20 | 9 | 0.9 | 100 | 470 | | | 31 | | 80 | 0.54 |
| | | 8 | SR 1316 | FROM SR 1004 TO SR 1006 | 3 | 2.01 | 22 | 80 | 4.02 | 489 | | 4,630 | | 278 | | 200 | 2.41 |
| | | 9 | SR 1549 | FROM SR 1558 TO NC 87 | 4 | 1.4 | 20 | 28 | 2.8 | 100 | 1,460 | | | 95 | | 100 | 1.68 |
| | | 10 | SR 1955 | FROM US 15-501 TO SR 1012 | 4 | 3.5 | 20 | 70 | 7 | 100 | 3,645 | | | 237 | | 25 | 4.20 |
| TOTAL FOR PROJ NO. 8CR.20191.8 | | | | | | 17.29 | | 386 | 34.58 | 889 | 5,575 | 16,000 | | 1,323 | | 1,505 | 20.75 |
| GRAND TOTAL | | | | | | 26.38 | | 599 | 58.58 | 2,334 | 5,575 | 30,530 | 2,565 | 2,195 | 154 | 2,605 | 31.94 |

| | | |
|----------------------------------------------------------|----------------|-----------|
| PROJECT NO. 8C.019088, 8C.019089 8CR.10191.8, ETC. | SHEET NO. 6 | TOTAL NO. |
|----------------------------------------------------------|----------------|-----------|

THERMOPLASTIC AND PAINT QUANTITIES

| PROJECT NO | COUNTY | MAP NO | ROUTE | DESCRIPTION | 4685000000-E | | 4686000000-E | | 4705000000-E | 4710000000-E | 4721000000-E | 4725000000-E | | | 4810000000-E | | 4900000000-N | 4905000000-N |
|---------------------------------------|---------|--------|----------|------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|---------------------------|----------------------------------|----------------------------------|-------------------------|--------------------------|-------------------------------------|-----------------------------------|--------------|
| | | | | | 4" X 90 M WHITE THERMO LF | 4" X 90 M YELLOW THERMO LF | 4" X 120 M YELLOW THERMO LF | 4" X 120 M WHITE THERMO LF | 16" X 120 M WHITE THERMO LF | 24" X 120 M WHITE THERMO LF | THERMO RXR 120 M EA | THERMO RT ARROW 90 M EA | THERMO LT ARROW 90 M EA | 4" WHITE PAINT LF | 4" YELLOW PAINT LF | YELLOW & YELLOW MARKERS EA | SNOW PLOWABLE MARKERS EA | |
| 8C.019088 | Chatham | 1 | SR 1916 | FROM SR 1924 TO NC 42 | 25,286 | | 15,510 | | 100 | 50 | 4 | | | | 18,000 | 155 | | |
| TOTAL FOR PROJ NO. 8C.019088 | | | | | 25,286 | | 15,510 | | 100 | 50 | 4 | | | | 18,000 | 155 | | |
| | | | | | 25,286 | | 15,510 | | 100 | 50 | 4 | | | | 18,000 | 155 | | |
| 8C.019089 | Chatham | 2 | SR 1733 | FROM NC 751 TO WAKE CO. LINE | | | | | | | | | | | 18,000 | | | |
| TOTAL FOR PROJ NO. 8C.019089 | | | | | | | | | | | | | | | 61,500 | 49,200 | 192 | |
| | | | | | | | | | | | | | | | 61,500 | 49,200 | 192 | |
| | | | | | | | | | | | | | | | 110,700 | | | |
| 8CR.10191.8 | Chatham | 3 | NC 902 | FROM SR 1010 TO NC 87 | 26,147 | | 16,038 | | | | | | | | | | | |
| | | 4 | US 64 WB | FROM CONST. JOINT 0.61 MI. W. OF SR 1008 TO BRIDGE #59 | 3,891 | 3,749 | | 937 | | 50 | | | | | | | | 160 |
| | | 5 | US 64 EB | FROM BRIDGE #58 TO CONST JT 0.61 MI W. SR 1008 | 3,781 | 3,643 | | 911 | | 50 | | 2 | 2 | | | | | 47 |
| TOTAL FOR PROJ NO. 8CR.10191.8 | | | | | 33,819 | 7,392 | 16,038 | 1,848 | | 100 | | 4 | 4 | | | | | 46 |
| | | | | | 41,211 | | 17,886 | | | | | 8 | | | | | | 253 |
| 8CR.20191.8 | Chatham | 6 | SR 1006 | FROM SCL SILER CITY TO NC 902 | 106,847 | | 65,538 | | | | | | | | | | | |
| | | 7 | SR 2110 | FROM 24' PAVEMENT WIDENING TO PAVEMENT JOINT PONY FARM RD. | | | | | | | | | | | | | | 655 |
| | | 8 | SR 1316 | FROM SR 1004 TO SR 1006 | | | | | | | | | | | 9,500 | 7,600 | | 30 |
| | | 9 | SR 1549 | FROM SR 1558 TO NC 87 | | | | | | | | | | | 42,500 | 34,000 | | 265 |
| | | 10 | SR 1955 | FROM US 15-501 TO SR 1012 | | | | | | | | | | | 29,600 | 23,700 | | |
| TOTAL FOR PROJ NO. 8CR.20191.8 | | | | | 106,847 | | 65,538 | | | | | | | | 73,950 | 59,200 | 231 | |
| | | | | | 106,847 | | 65,538 | | | | | | | | 155,550 | 124,500 | 1,181 | |
| | | | | | | | | | | | | | | | 280,050 | | | |
| GRAND TOTAL | | | | | 165,952 | 7,392 | 97,086 | 1,848 | 100 | 150 | 4 | 4 | 4 | | 217,050 | 191,700 | 1,528 | 253 |
| | | | | | 173,344 | | 98,934 | | | | | 8 | | | 408,750 | | | |

