

B.17/99



Firm License No. C-1051  
421 Fayetteville St.  
Suite 400  
Raleigh, NC 27601  
T 919.380.8750  
www.stewartinc.com

PROJECT REFERENCE NO. <b>B-4448</b>	SHEET NO. <b>2A-1</b>
ROADWAY DESIGN ENGINEER ANDREW P. YOUNG SEAL 034407 5/10/2018	PAVEMENT DESIGN ENGINEER CLARK S. HARRISON SEAL 22896 5/12/2018





**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

### FINAL PAVEMENT SCHEDULE

<b>C1</b>	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	<b>E1</b>	PROP. APPROX. 12" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF THREE LAYERS.
<b>C2</b>	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	<b>E2</b>	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
<b>C3</b>	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	<b>E3</b>	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
<b>C4</b>	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	<b>E4</b>	PROP. APPROX. 4½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
<b>C5</b>	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 1½" IN DEPTH.	<b>E5</b>	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.
<b>C6</b>	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	<b>J1</b>	8" AGGREGATE BASE COURSE.
<b>D1</b>	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	<b>R1</b>	SHOULDER BERM GUTTER.
<b>D2</b>	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	<b>T</b>	EARTH MATERIAL.
<b>D3</b>	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	<b>U</b>	EXISTING PAVEMENT.
<b>D4</b>	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	<b>V1</b>	MILLING ASPHALT PAVEMENT, 0.5" DEPTH. (REMOVAL OF EXISTING ULTRA THIN PAVEMENT)
		<b>V2</b>	MILLING ASPHALT PAVEMENT, 1.5" DEPTH.
		<b>W</b>	ASPHALT WEDGING (SEE DETAIL).
		<b>Y</b>	MILLED RUMBLE STRIPS.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1, UNLESS SHOWN OTHERWISE

REVISIONS

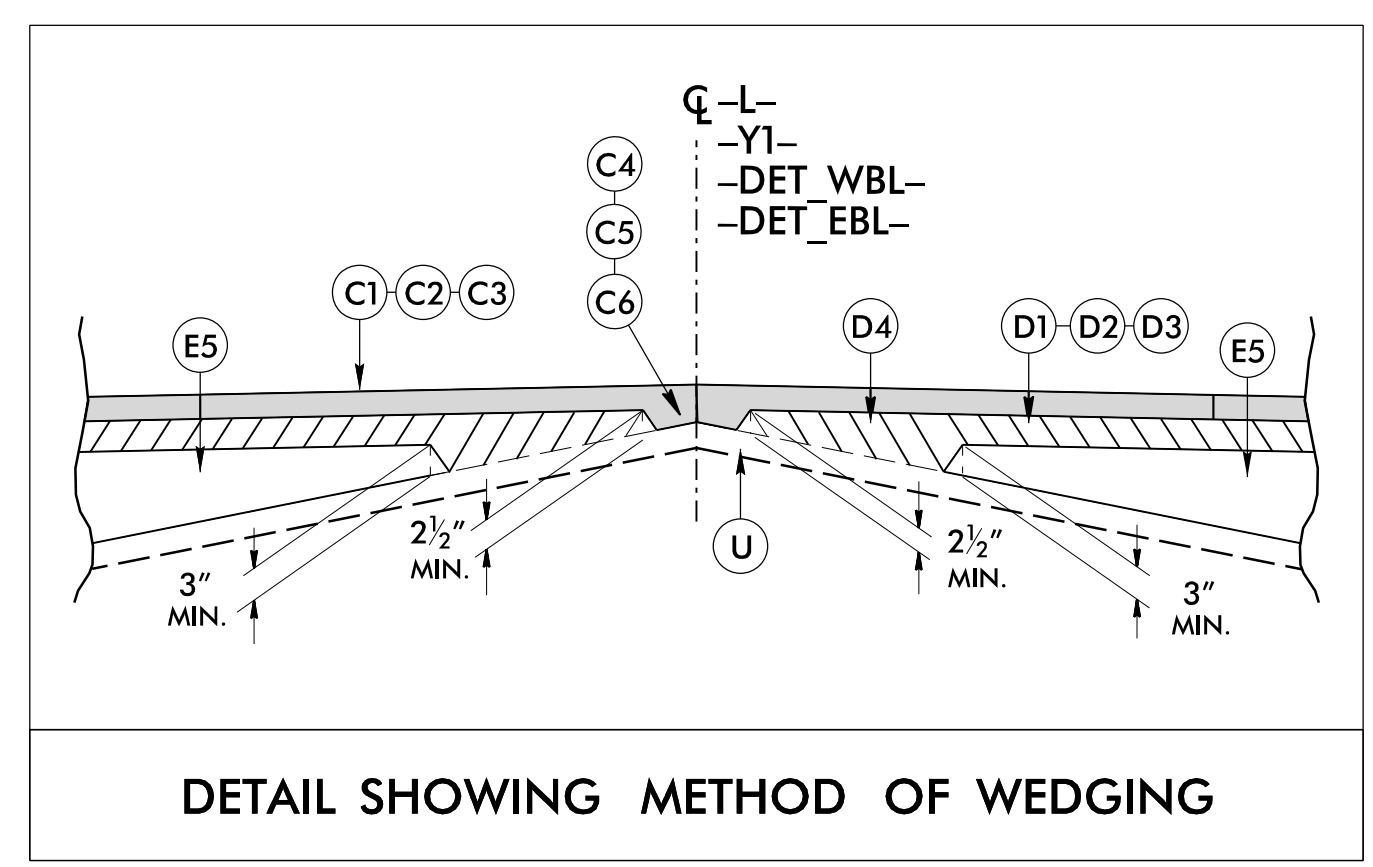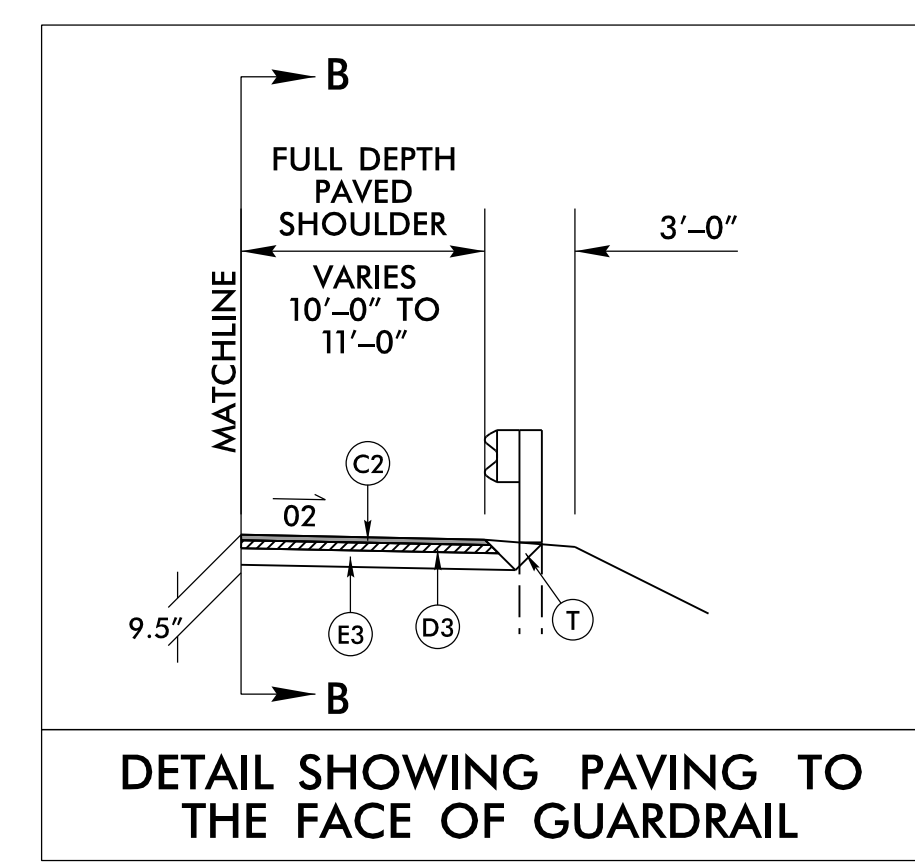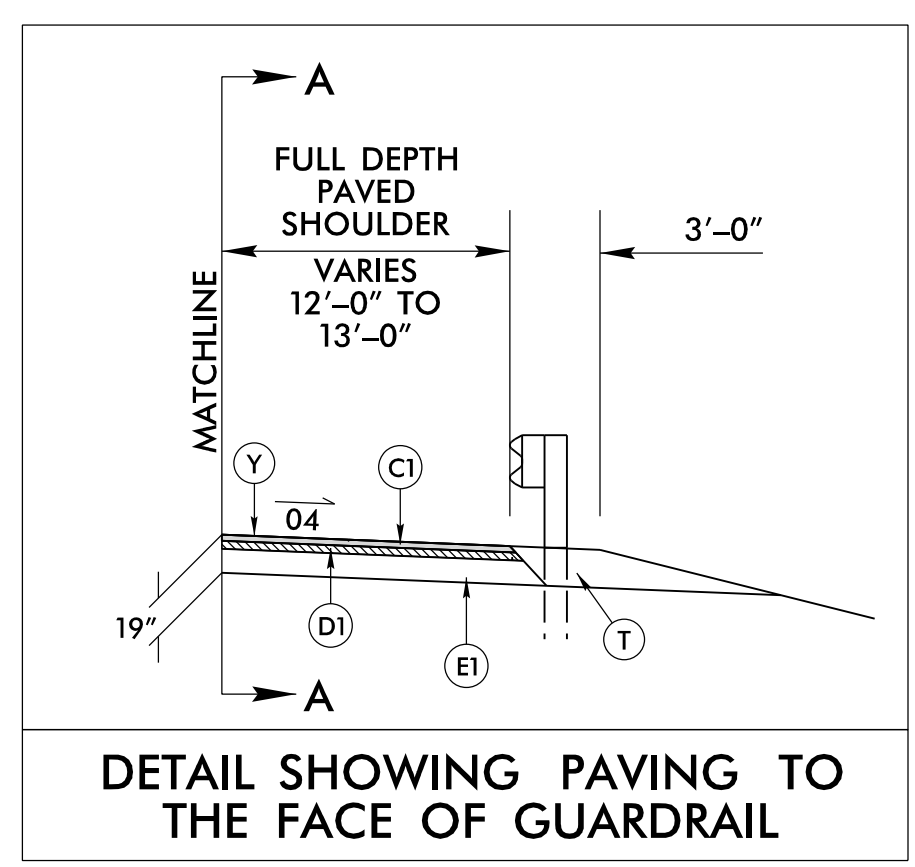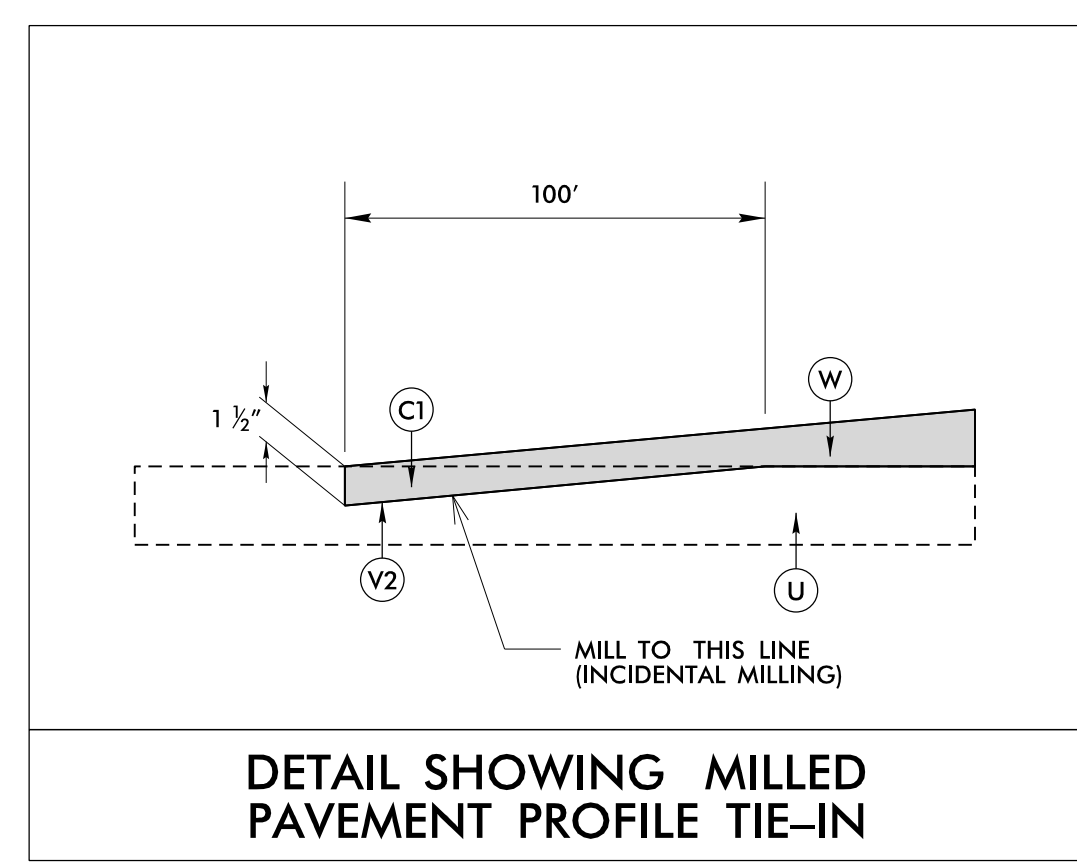

4/13/2016 9:41:00 AM N:\Projects\B4448\_RDY\_TYP.dgn  
USER: jacob