
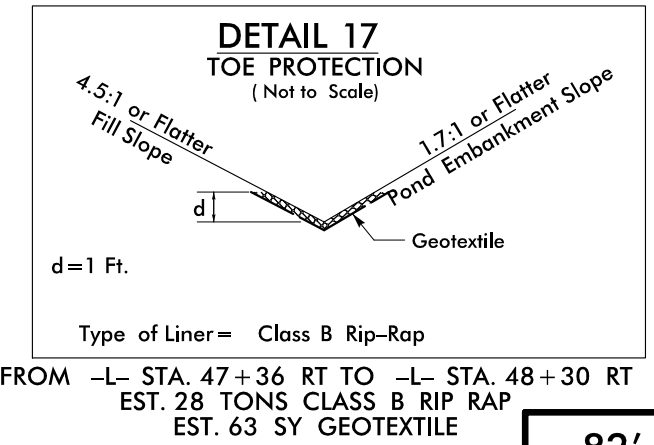


PLANS

Apply Sod Strip in Raised Median and Behind Guard Rail

Place Matting for Erosion Control on Slope as Work Allows.  
 -L- Sta. 37+00 LT to Sta. 40+00 LT  
 -L- Sta. 41+50 LT to Sta. 46+50 LT  
 -L- Sta. 36+00 RT to Sta. 37+00 RT  
 -L- Sta. 40+00 RT to Sta. 44+50 RT  
 -Y4- Sta. 11+00 to Sta. 12+50 LT & RT

INSTALL INLET PROTECTION IN ACCORDANCE WITH ENGINEER'S RECOMMENDATIONS

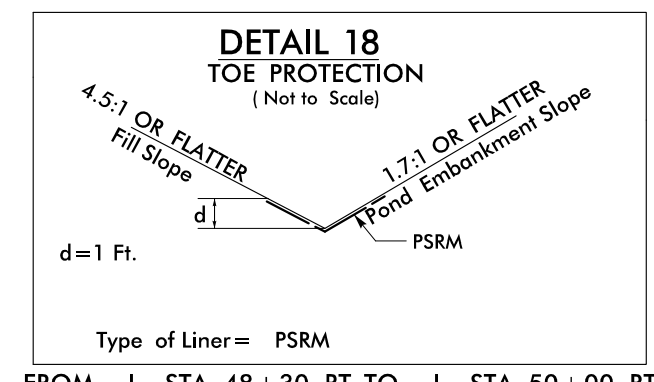











82' x 22' x 3'  
1.5 inch Skimmer  
with 1.25 inch Orifice Diameter  
7 ft. weir  
ID 6.1

46' x 23' x 3'  
1.5 inch Skimmer  
with 0.875 inch Orifice Diameter  
4 ft. weir  
ID 6.2

50' x 20' x 3'  
ID 6.3

MATCHLINE -L- STA. 36+00.00 SEE PLAN SHEET EC-25

MATCHLINE -L- STA. 49+00.00 SEE PLAN SHEET EC-27

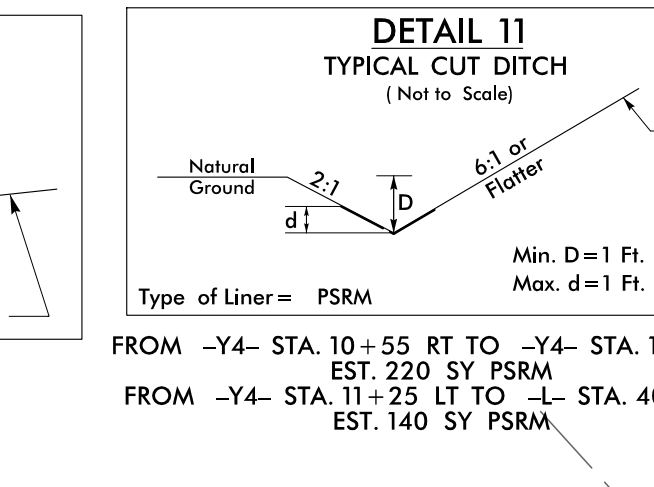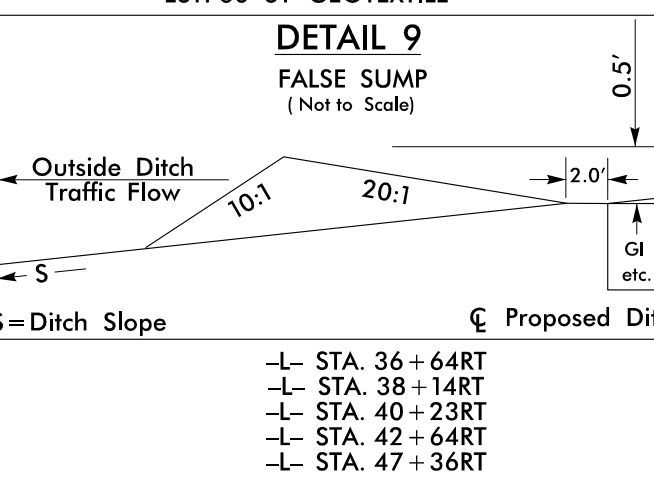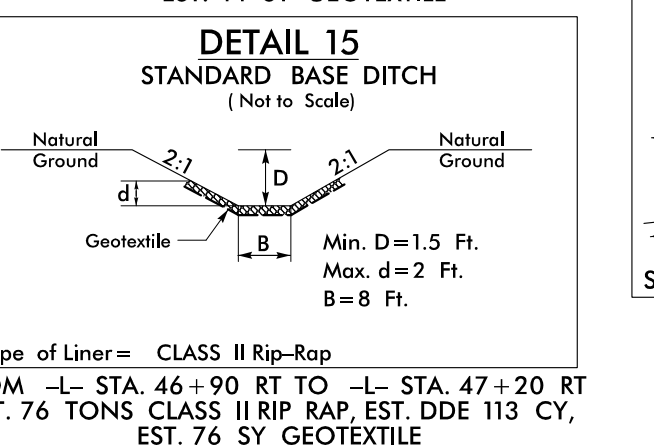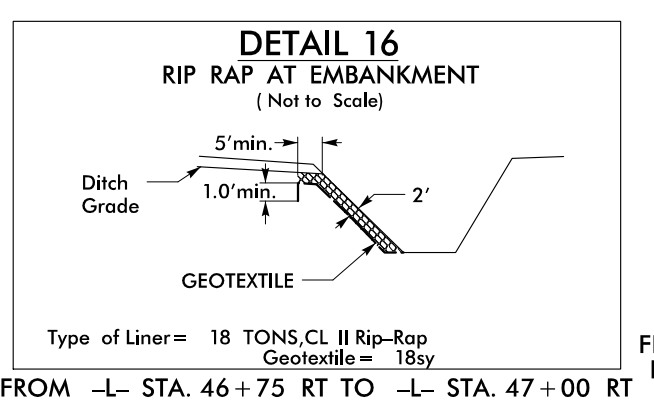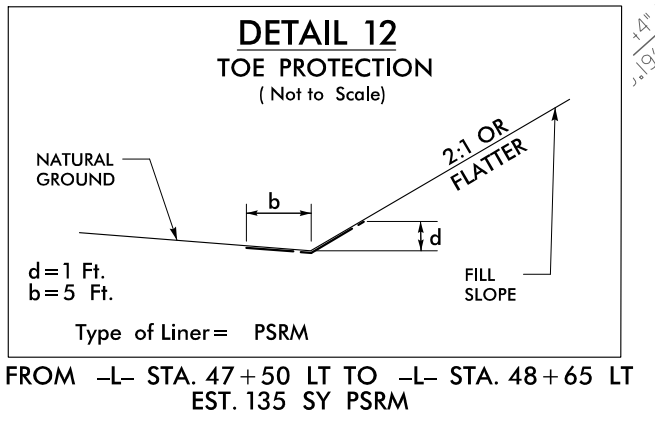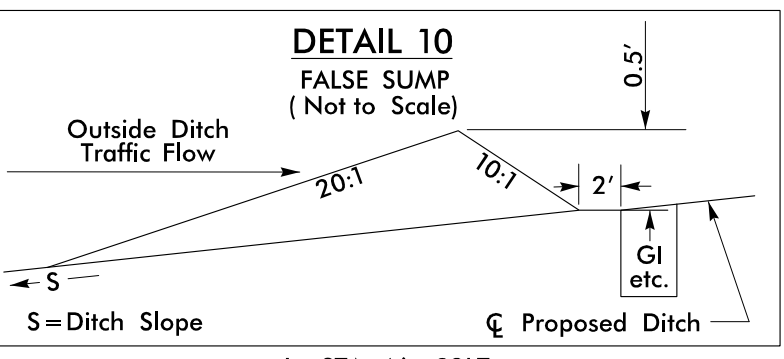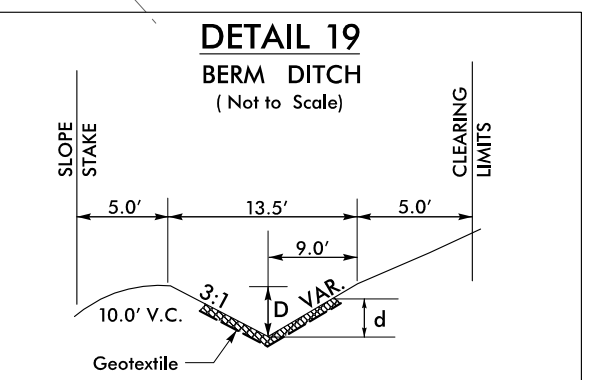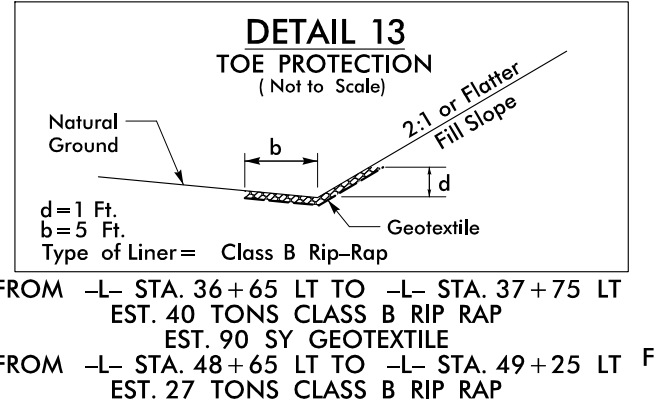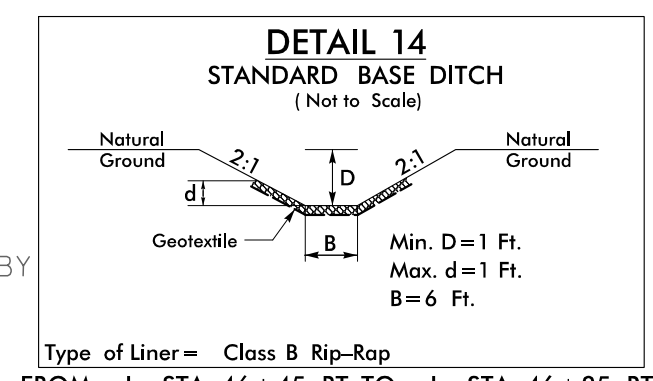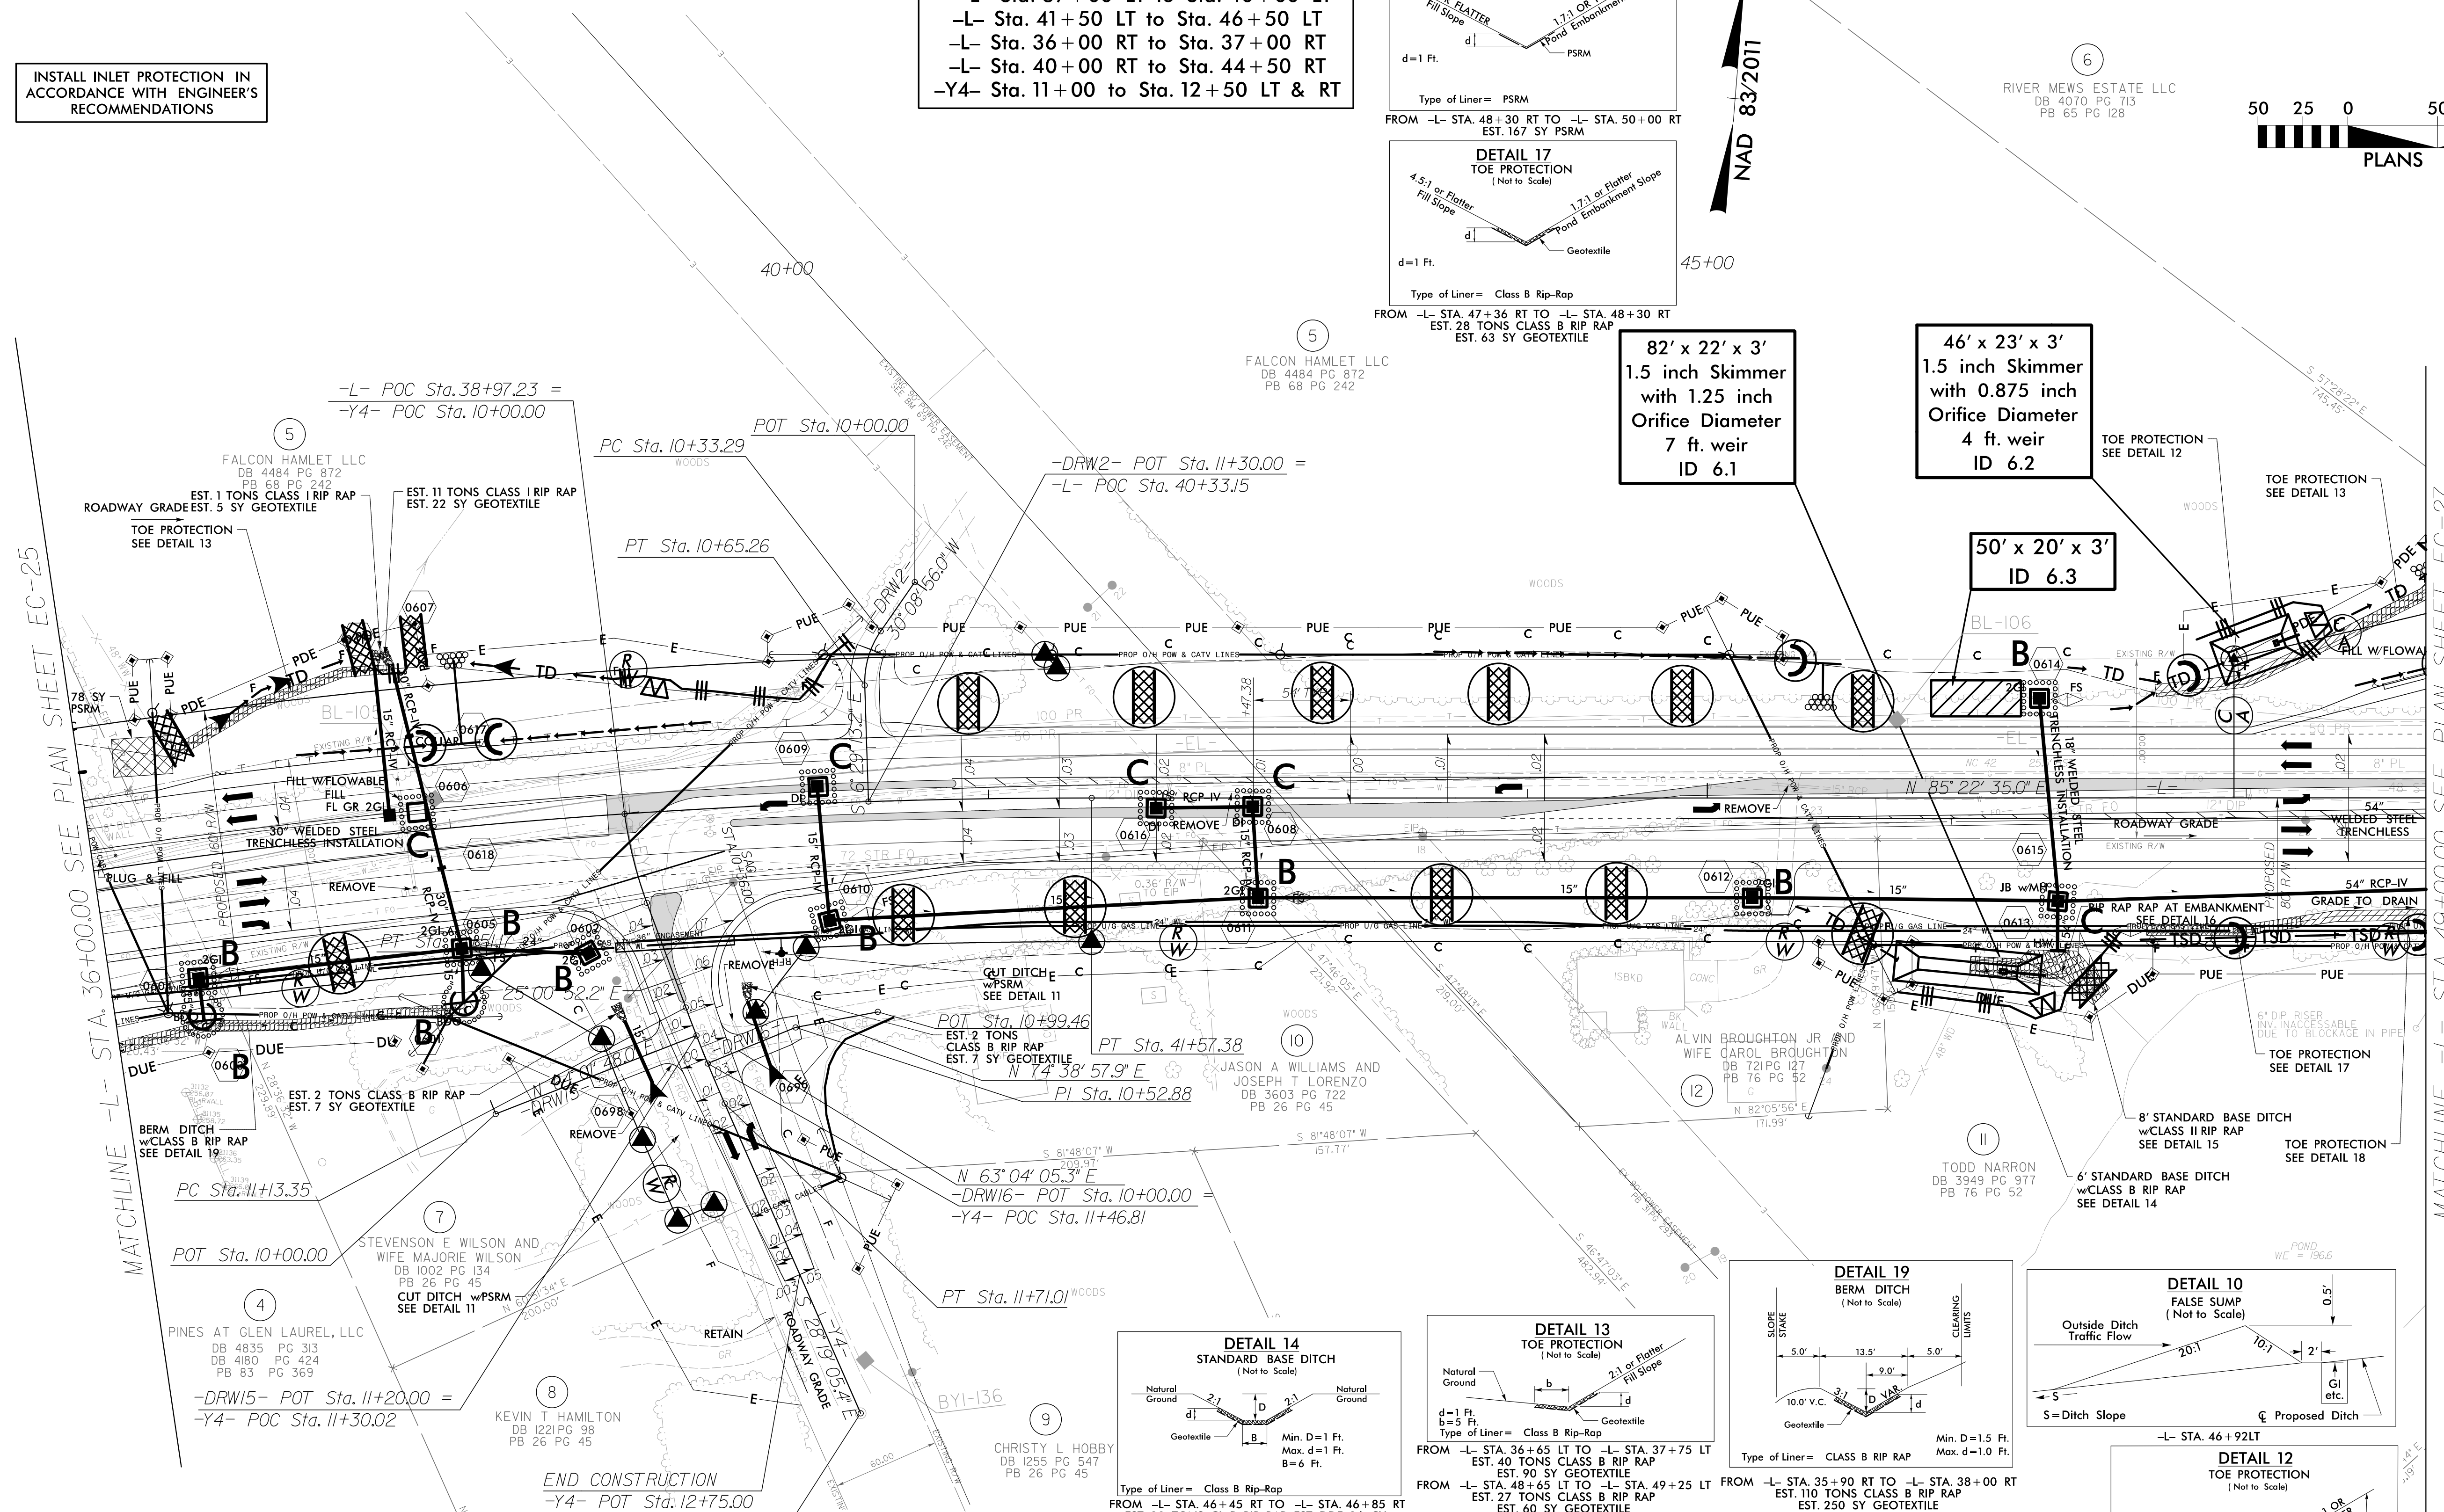

FOR -L- PROFILE SEE SHEET 25  
FOR -Y4- PROFILE SEE SHEET 33

REVISIONS

DATE/TIME: 05/30/20 AM  
 2016: P:\Erosion Control\3825B\_rwl\_EC\_26.ecg