


APPROVED: *Charles A. Johnson, III*
DocuSigned by:
 Charles A. Johnson, III
 98A1955B47F54A6

DATE: 4/23/2018

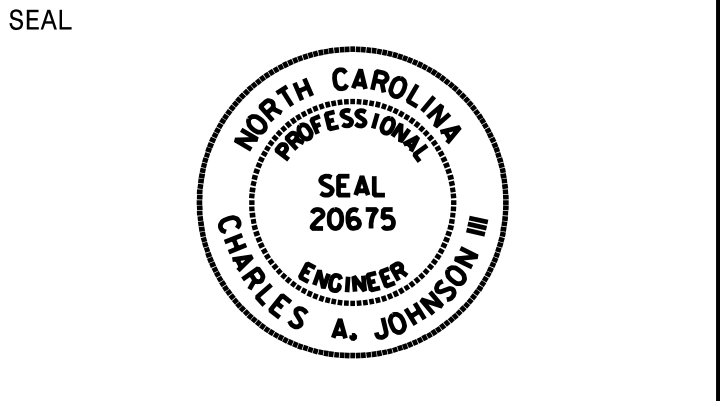


**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 1
 TYPE: A (OVHD)
 QUANTITY: 1
 SIGN WIDTH: 12'-0"
 HEIGHT: 9'-0"
 TOTAL AREA: 108.0 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 2"
 RADII: 12"
 NO. Z BARS: 3
 LENGTH: 136.0

SYMBOL	X	Y	WID	HT
M1_1	23.5	58.8	36	36
Type C Arrow	60	9	24	16.5

DESIGN BY: JTT
 PROJECT ID: I-5714/U-5114
 CHECKED BY: TRT/ADK
 DIV: 10
 DATE: August 2017

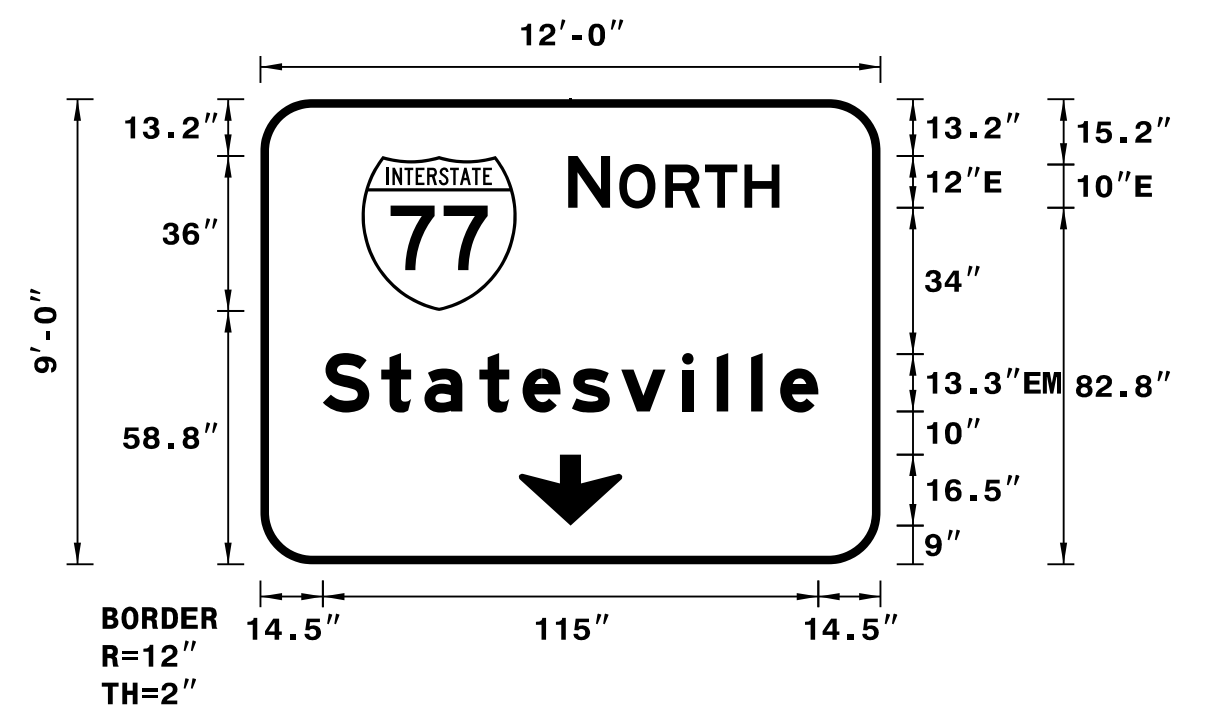

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
 - Arrow and shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
 - Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	N		O	R	T	H							E 2000
71.5	9.7	2.1	10.7	9.2	9.2	8.1	23.5						49
	S	t	a	t	e	s	v	i	l	l	e		EM 2000
14.5	13.6	10	12.8	10	11.5	11.5	14.1	8	8	6.8	8.8	14.5	115

SIGN NUMBER: 2
 TYPE: A (OVHD)
 QUANTITY: 1
 SIGN WIDTH: 19'-6"
 HEIGHT: 9'-0"
 TOTAL AREA: 175.5 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 2"
 RADII: 12"
 NO. Z BARS: 3
 LENGTH: 226.0

SYMBOL	X	Y	WID	HT
M1_4	217.5	63.1	36	36
Type C Arrow	59	37	24	16.5
Type C Arrow	239	37	24	16.5

DESIGN BY: JTT
 PROJECT ID: I-5714/U-5114
 CHECKED BY: TRT/ADK
 DIV: 10
 DATE: August 2017

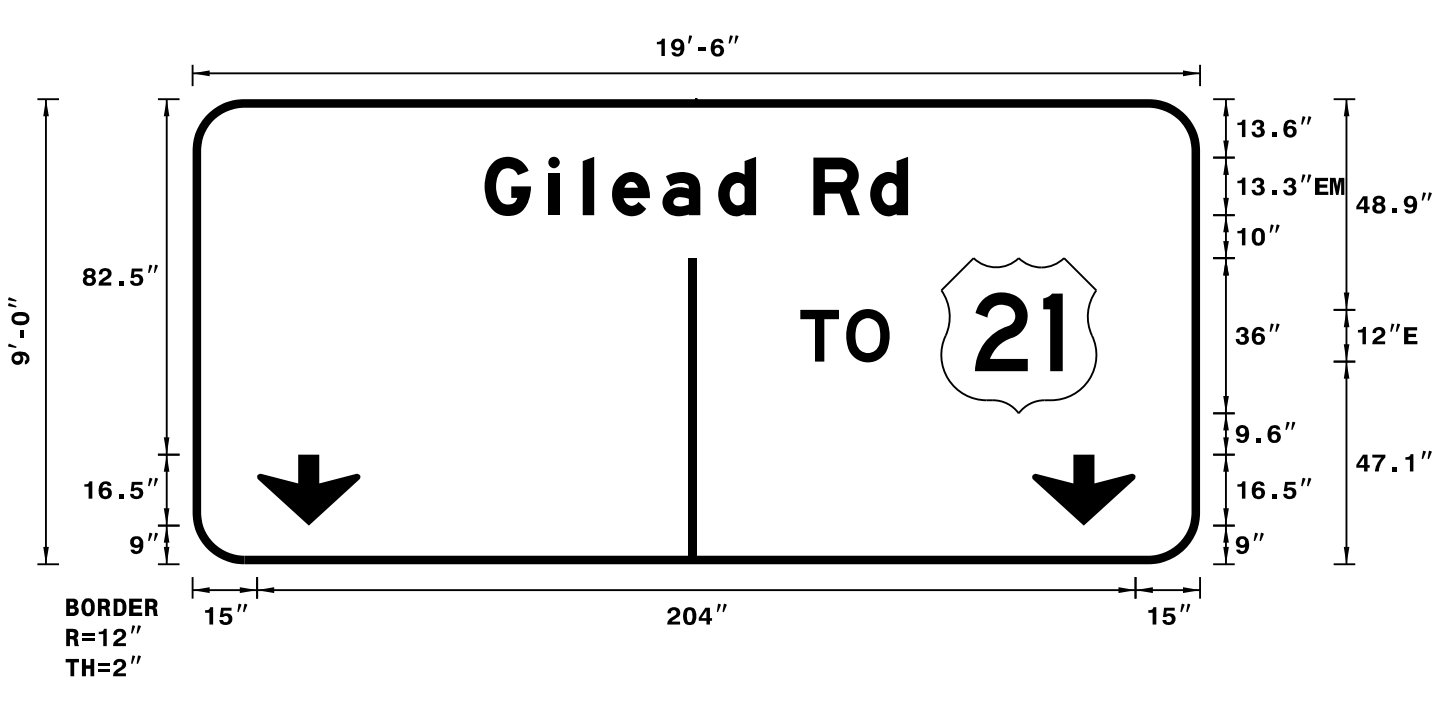

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
 - Arrows and shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
 - Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	G	i	l	e	a	d		R	d				EM 2000
111.8	14.8	8	6.8	11.7	12.9	8.8	13.3	13.2	8.8	21.6			98.4
	T	O											E 2000
185.1	10.7	10.1	125.9										20.8

SIGN NUMBER: 3
 TYPE: A (OVHD)
 QUANTITY: 1
 SIGN WIDTH: 10'-6"
 HEIGHT: 11'-0"
 TOTAL AREA: 115.5 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 2"
 RADII: 12"
 NO. Z BARS: 3
 LENGTH: 118.0

SYMBOL	X	Y	WID	HT
M1_1	14.5	81.3	36	36
R3-5(R)	48	10	30	36

DESIGN BY: JTT
 PROJECT ID: I-5714/U-5114
 CHECKED BY: TRT/ADK
 DIV: 10
 DATE: August 2017

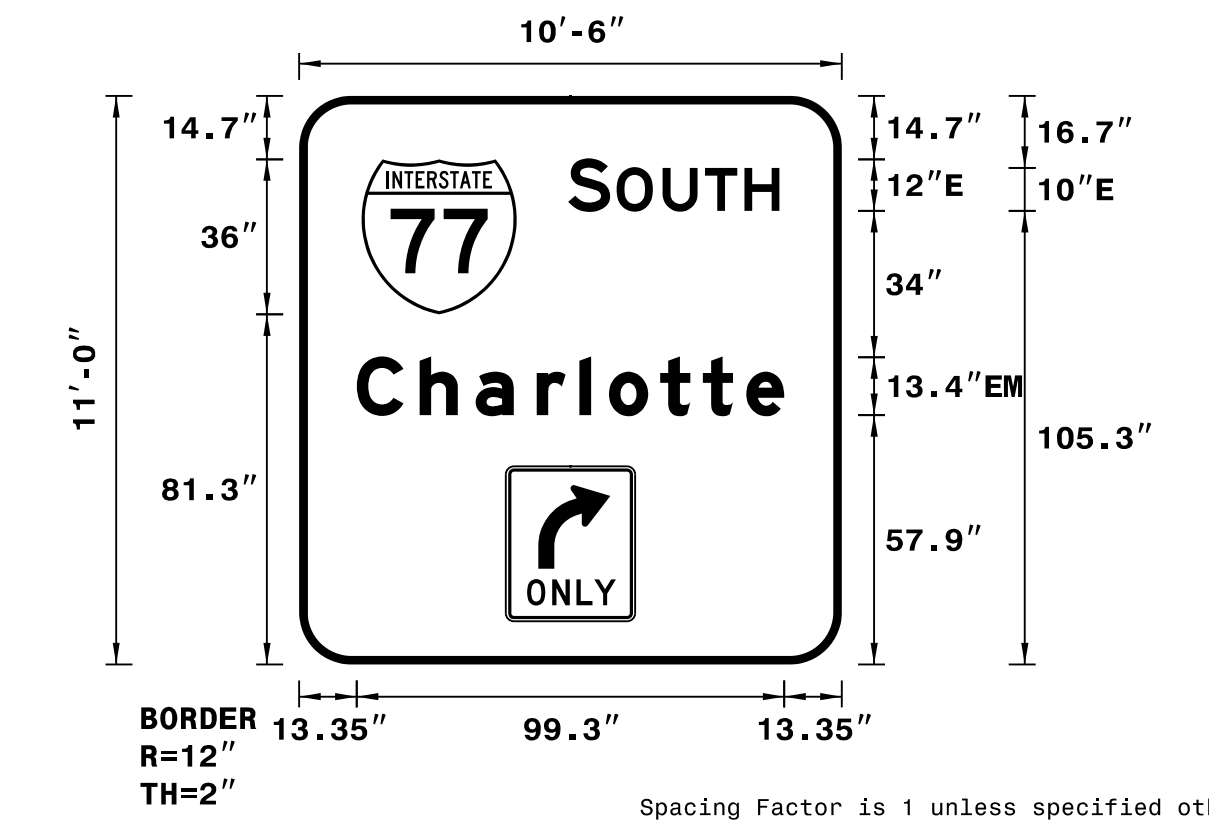

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
 - Shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
 - Background shall be Grade C reflective sheeting.
 - R3-5(R) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	S		O	U	T	H							E 2000
62.5	9.7	1.5	10.7	9.8	9.2	8.1	14.5						49
	C	h	a	r	l	o	t	t	e				EM 2000
13.4	14.6	13	14.2	9.9	6.8	11.9	9.9	10	8.8	13.4			99.3

SIGN NUMBER: 4
 TYPE: A (OVHD)
 QUANTITY: 1
 SIGN WIDTH: 10'-6"
 HEIGHT: 11'-0"
 TOTAL AREA: 115.5 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 2"
 RADII: 12"
 NO. Z BARS: 3
 LENGTH: 118.0

SYMBOL	X	Y	WID	HT
M1_1	14.5	81.3	36	36
R3-5(L)	48	10	30	36

DESIGN BY: JTT
 PROJECT ID: I-5714/U-5114
 CHECKED BY: TRT/ADK
 DIV: 10
 DATE: August 2017

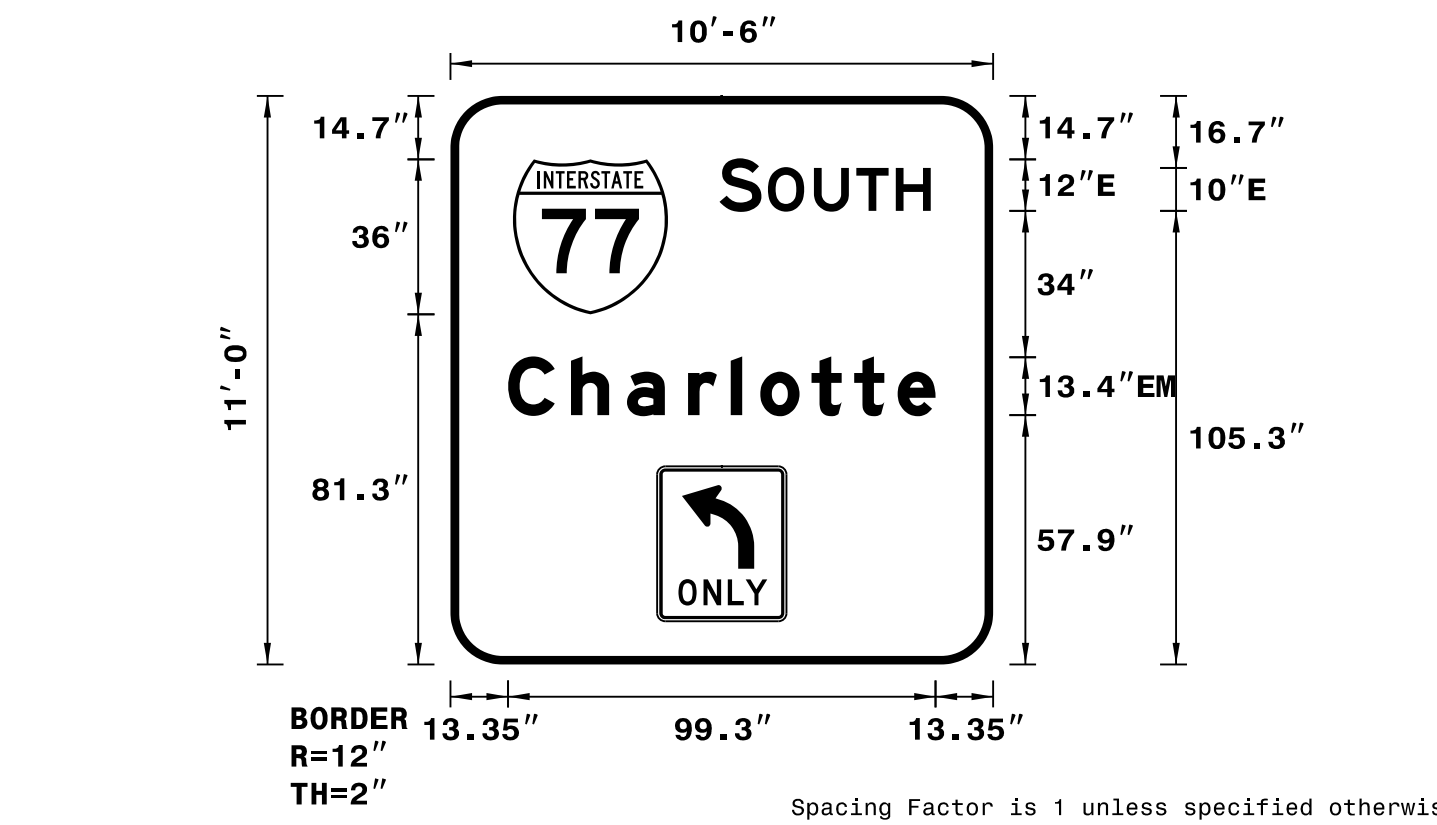

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
 - Shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
 - Background shall be Grade C reflective sheeting.
 - R3-5(L) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	S		O	U	T	H							E 2000
62.5	9.7	1.5	10.7	9.8	9.2	8.1	14.5						49
	C	h	a	r	l	o	t	t	e				EM 2000
13.4	14.6	13	14.2	9.9	6.8	11.9	9.9	10	8.8	13.4			99.3