


Recommended Number of Turns

Single 6' X 6' loop (when wired separately):

WIICH WIICG 3	cparacery, .
Length of Lead-in ft	Number of Turns
< 250	3
250-375	4
375-525	5
> 525	6

Quadrupole loops: Use 2-4-2 turns

6' X 15' Loops: Lead-in < 150', use 2 turns Lead-in > 150', use 3 turns

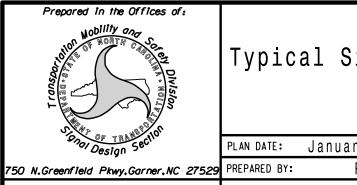

Typical Signal Loop Locations

						1117
Design Section	PLAN DATE:	January 2015	REVIEWED BY:	JPG		
d Pkwy.Garner.NC 27529	PREPARED BY:	PLA	REVIEWED BY:			7
SCALE		REVISIONS		INIT.	DATE	—DocuSign
N / A						B4756E00

PROJECT REFERENCE NO.

I-6063

SIG-1