


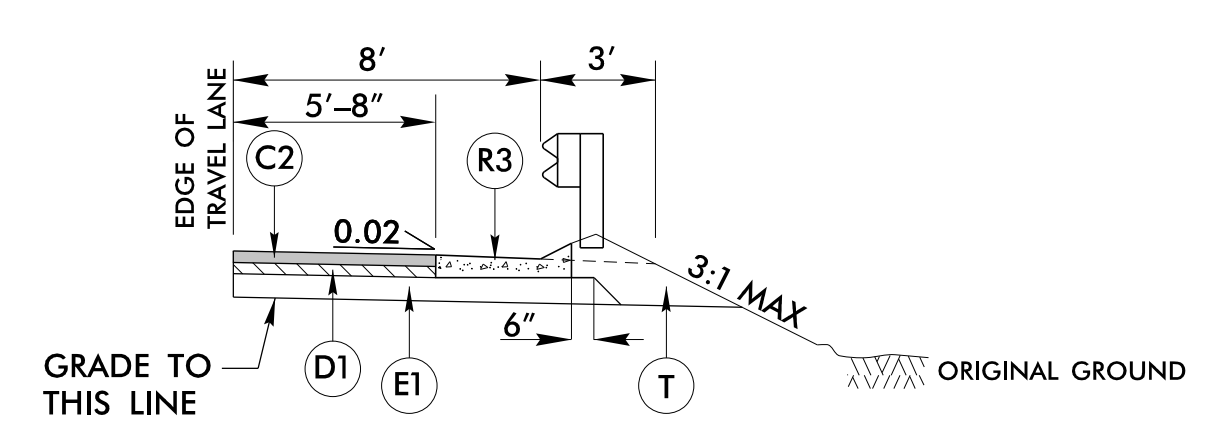


PROJECT REFERENCE NO. 15806.1009011	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER  8/7/2020	PAVEMENT DESIGN ENGINEER  8/7/2020
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
 ICE of Carolinas, PLLC 4505 Falls of Neuse Road, Suite 110 Raleigh, North Carolina 27609 Phone: 919-822-0353 License #: P-0999	


PRELIMINARY PAVEMENT SCHEDULE

C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD	J1	PROP. 8" AGGREGATE BASE COURSE		
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LAYERS	P	PRIME COAT AT THE RATE OF .35 GAL PER SQ. YARD	T	EARTH MATERIAL
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE, TYPE S9.5C AT AN AVERAGE RATE OF 112 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH	R1	2'-6" CONCRETE CURB AND GUTTER	U	EXISTING PAVEMENT
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD	R2	1'-6" CONCRETE CURB AND GUTTER	V1	1½" MILLING
D2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" OR GREATER THAN 4" IN DEPTH.	R3	CONCRETE SHOULDER BERM GUTTER	V2	INCIDENTAL MILLING
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD	R4	5" CONCRETE MONOLITHIC ISLAND	W	WEDGING

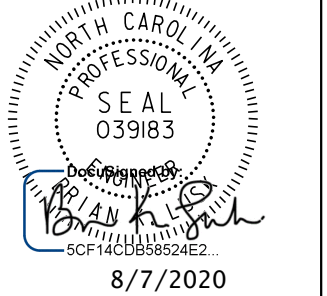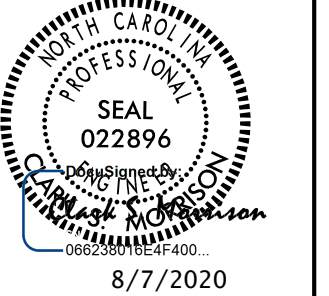


SHOULDER BERM GUTTER DETAIL

- L_SB- STA. 125 + 23.52 TO -L_SB- STA. 125 + 50.00
- L_SB- STA. 132 + 59.81 TO -L_SB- STA. 137 + 00.00
- L_NB- STA. 110 + 75.90 TO -L_NB- STA. 112 + 39.44
- L_NB- STA. 125 + 05.37 TO -L_NB- STA. 132 + 00.00

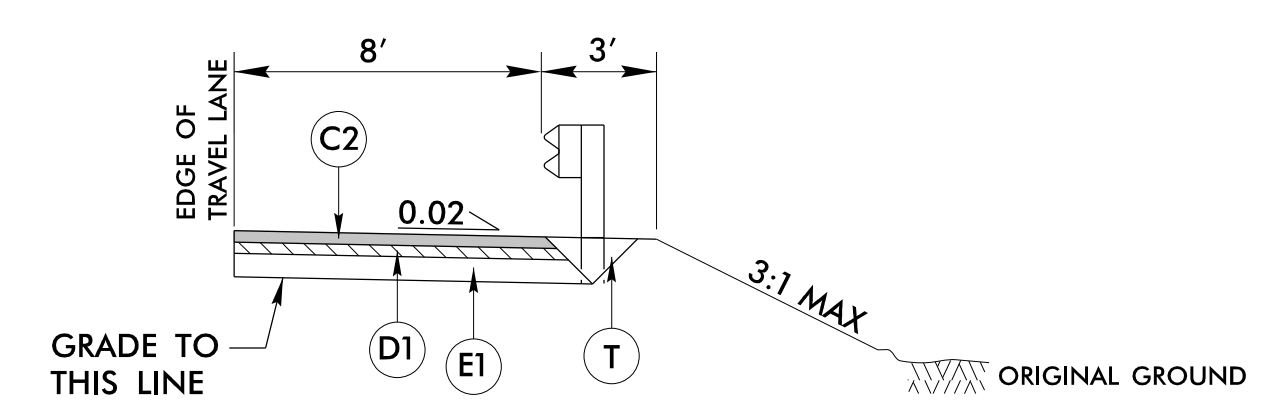

GUARDRAIL DETAIL


- L_SB- STA. 108 + 99.74 TO -L_SB- STA. 112 + 58.19
- L_SB- STA. 125 + 24.12 TO -L_SB- STA. 127 + 56.42
- L_SB- STA. 128 + 93.51 TO -L_SB- STA. 132 + 11.19
- L_SB- STA. 132 + 57.24 TO -L_SB- STA. 137 + 00.00
- L_NB- STA. 110 + 32.14 TO -L_NB- STA. 112 + 39.44
- L_NB- STA. 125 + 05.37 TO -L_NB- STA. 132 + 00.00

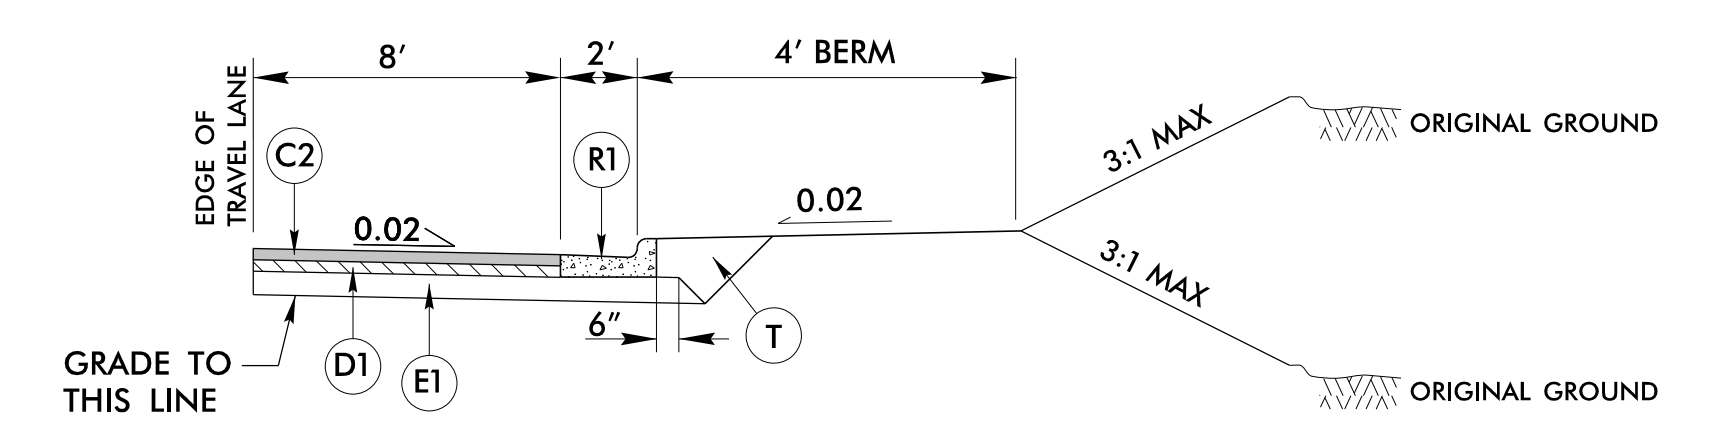

2'-6" CURB & GUTTER DETAIL


- L_SB- STA. 108 + 85.50 TO -L_SB- STA. 112 + 58.19
- L_NB- STA. 110 + 07.42 TO -L_NB- STA. 110 + 62.09 (TRANS TO SBG)

NOTE:
RETAIN EXISTING CURB AND GUTTER ON
-L_NB- AS SHOWN IN PLANS

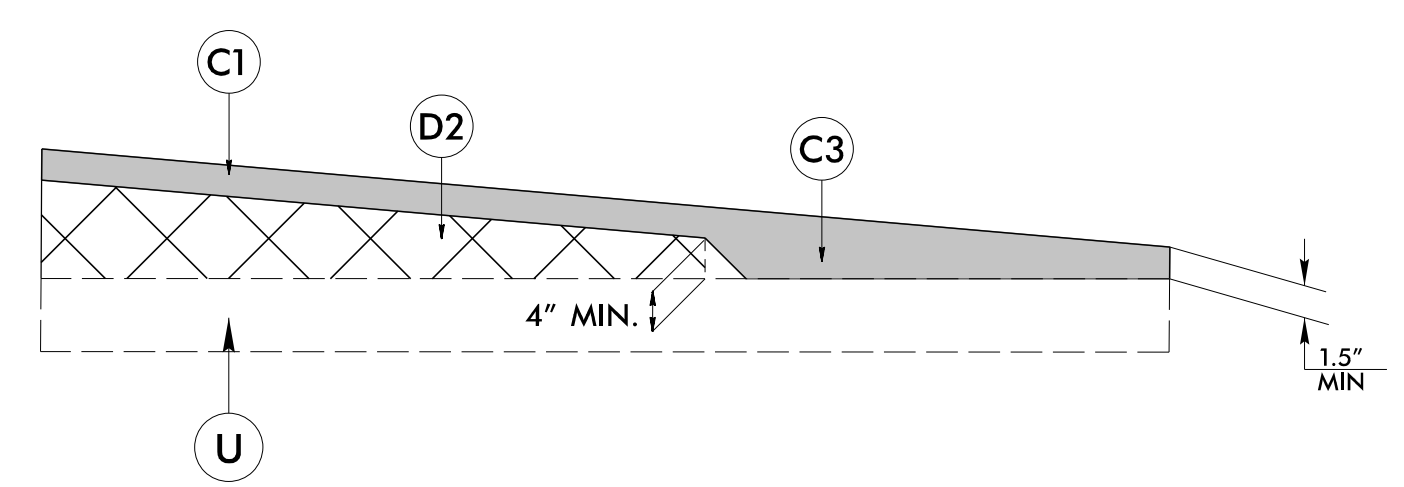


WEDGING DETAIL

USE IN CONJUNCTION W/TYPICAL SECTION NOS. 3, 4, 6, 7, 8, & 9

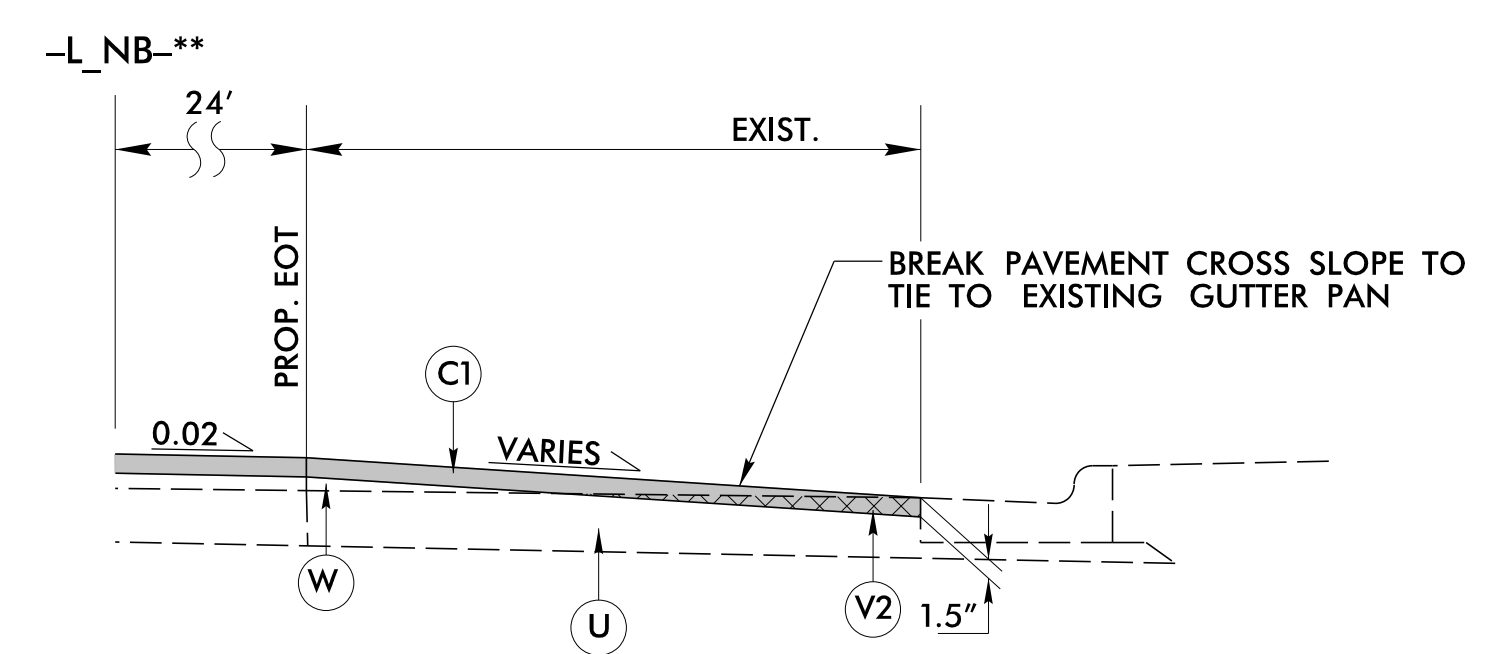

MILLING AT EXISTING CURB DETAIL

- L_NB- STA. 108 + 02.29 TO -L_NB- STA. 110 + 28.28

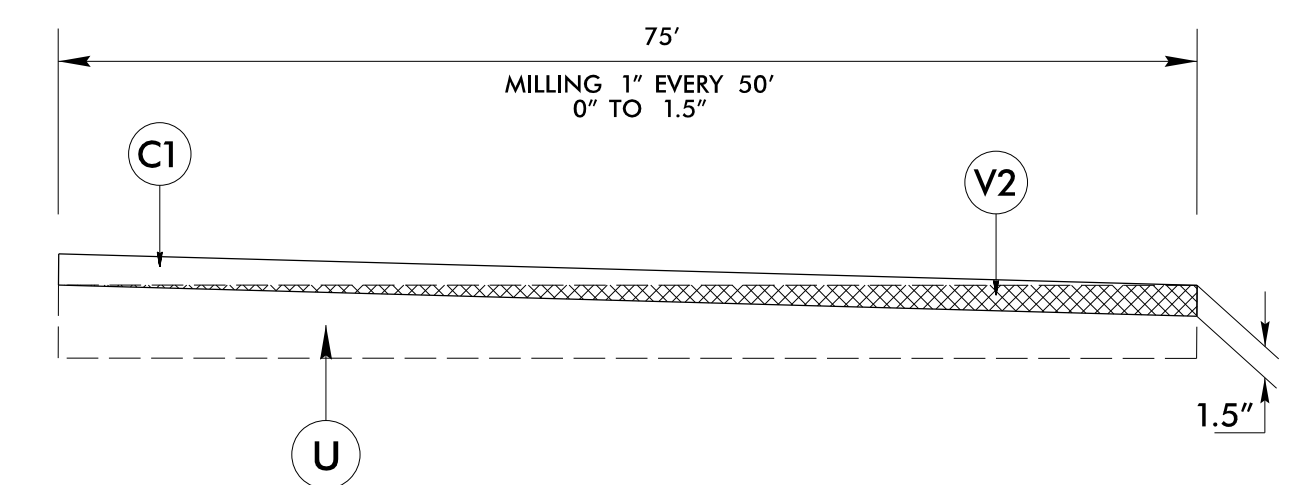

MILLING DETAIL

USE MILLING DETAIL AT RESURFACING TIES