


TYPICAL SECTION NO. 5

TO BE USED IN MAPS: 3, 4, 5, 7, 13, 21, 22

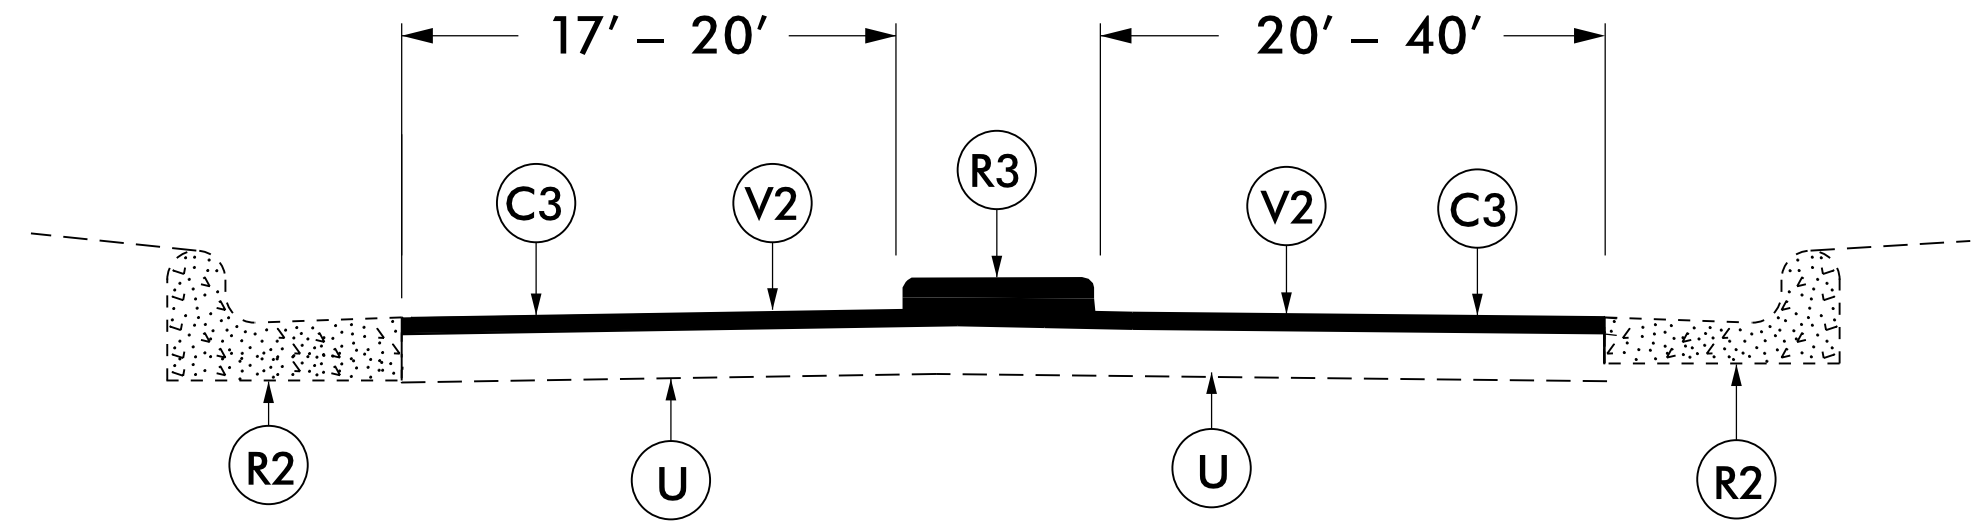

TYPICAL SECTION NO. 6

TO BE USED IN MAPS: 9, 10, 16, 17
MAP 18 STA. 10+00 TO STA. 13+59

PAVEMENT SCHEDULE			
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.		
C2	PROP. APPROX. 3/4" OPEN-GRADED ASPHALT FRICTION COURSE, TYPE FC-1 MODIFIED, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YD.		
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
D	PROP. APPROX. 4 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.		
F	PROPOSED FOG SEAL TO BE APPLIED TO THE EXISTING SHOULDER		
R1	EXISTING CONCRETE MEDIAN BARRIER WALL	R2	EXISTING CONCRETE 2'-6" CURB & GUTTER
R3	EXISTING CONCRETE ISLAND	U	EXISTING CONCRETE PAVEMENT WITH ASPHALT OVERLAY
V1	MILLING ASPHALT PAVEMENT 2 5/8" DEPTH	V2	MILLING ASPHALT PAVEMENT 1 1/2" DEPTH
V3	FINE MILLING 5/8" DEPTH	V4	MILLING ASPHALT PAVEMENT 4 1/2" DEPTH
V5	MILLED RUMBLE STRIPS		