



NOTES: MILL A SINGLE LANE AND PAVE BACK BY THE END OF EACH WORK DAY (AND SECONDARY ROUTE -Y- LINE TIE-INS)

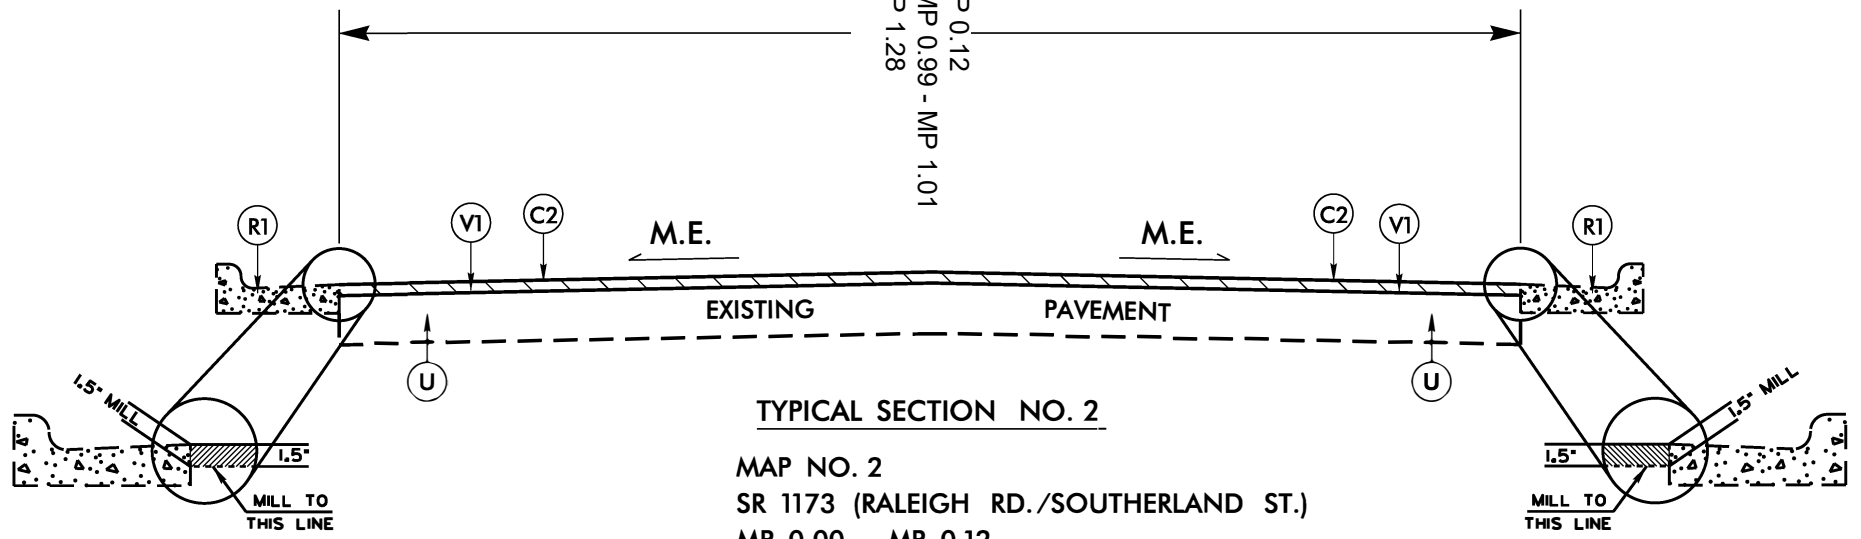

NOTES: MILL A SINGLE LANE AND PAVE BACK BY THE END OF EACH WORK DAY (AND SECONDARY ROUTE -Y- LINE TIE-INS)

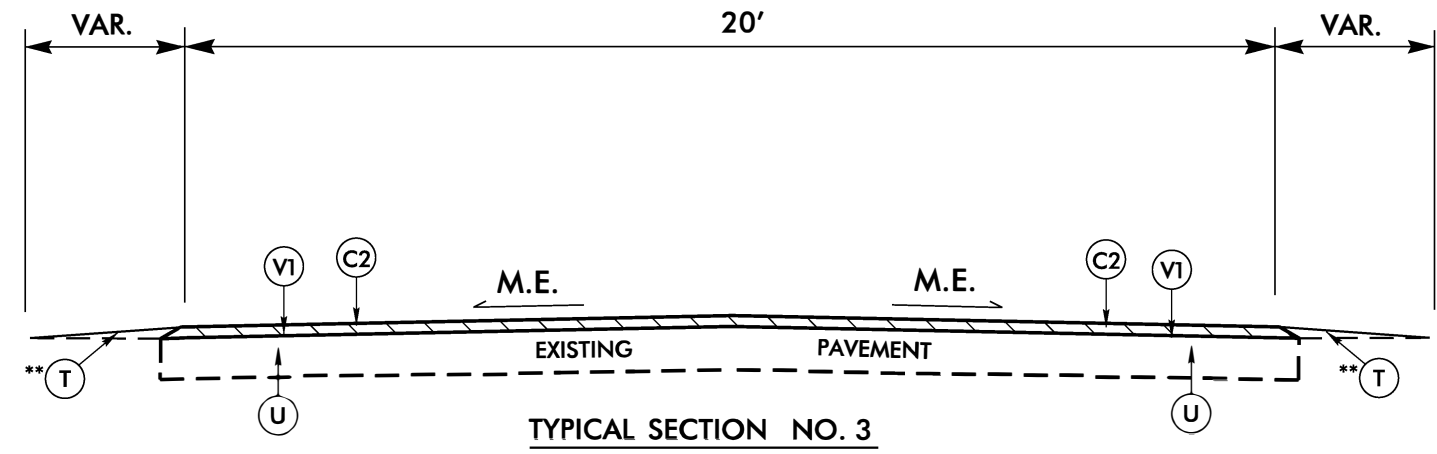

NOTES: MILL A SINGLE LANE AND PAVE BACK BY THE END OF EACH WORK DAY

** SHOULDER WORK ON MAP NO. 2 AS NEEDED, TO BE DETERMINED BY ENGINEER.

| PAVEMENT SCHEDULE | |
|-------------------|--|
| C1 | PROP. APPROX. 1½" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ.YD. |
| C2 | PROP. APPROX. 1½" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ.YD. |
| C3 | PROP. APPROX. 1" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ.YD. |
| C4 | PROP. APPROX. 1" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 100 LBS. PER SQ.YD. |
| E1 | PROP. APPROX. 4" DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ.YD. |
| F1 | ASPHALT SURFACE TREATMENT - #67 MAT COAT (GRANITE) STONE |
| R1 | EXISTING CONCRETE 2'-6" CURB & GUTTER |
| T | EARTH MATERIAL (SHOULDER RECONSTRUCTION) |
| U | EXISTING PAVEMENT |
| V1 | MILLING ASPHALT PAVEMENT, 1½" DEPTH |
| V2 | MILLING ASPHALT PAVEMENT, 1" DEPTH |

REVISIONS

25-SEP-2020 10:01 AM S:\Shared\NCRE\2021 Resurfacing Trace & Bridge\Duplin\Typicals\Duplin - Typical.dgn
 8/17/99