
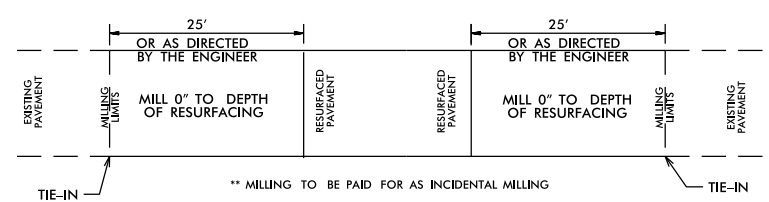


DETAILS OF PATCHING EXISTING PAVEMENT PRIOR TO RESURFACING

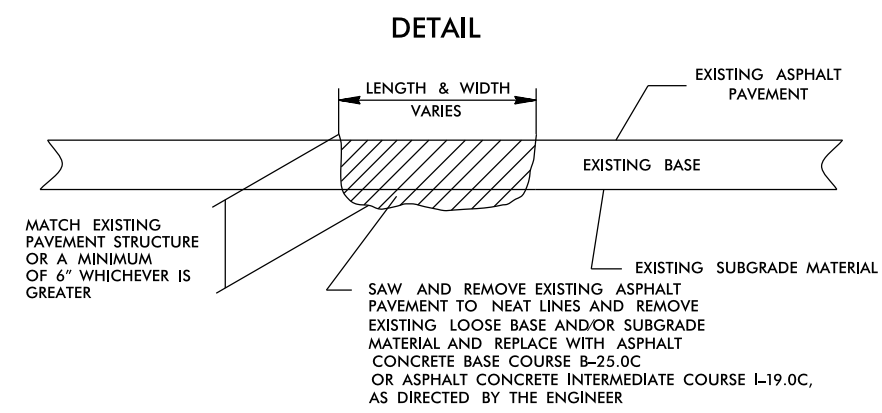

PAVEMENT TIE-IN DETAIL

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.0" ASPHALT CONCRETE LEVELING COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
F1	PROPOSED ASPHALT SURFACE TREATMENT, DOUBLE SEAL
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH