

SECTION THRU SLAB

(TYPE II - MODIFIED APPROACH FILL)

NOTES

FOR BRIDGE APPROACH FILL INCLUDING GEOTEXTILE, 4" Ø DRAINAGE PIPE, AND SELECT MATERIAL BACKFILL, SEE ROADWAY PLANS.


GEOTEXTILE SHALL BE TYPE 1 IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS SECTION 1056.

## SELECT MATERIAL BACKFILL (CLASS V OR CLASS VI) SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS SECTION 1016.

SELECT MATERIAL BACKFILL IS TO BE CONTINUOUS ALONG FILL FACE OF BACKWALL FROM OUTSIDE EDGE TO OUTSIDE EDGE OF APPROACH SLAB.

FOR THE 4" Ø DRAINAGE PIPE OUTLET(S), SEE ROADWAY STANDARD DRAWINGS. AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE GRADED TO DRAIN THE WATER AWAY FROM THE FILL FACE OF THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.

APPROACH SLAB GROOVING IS NOT REQUIRED.

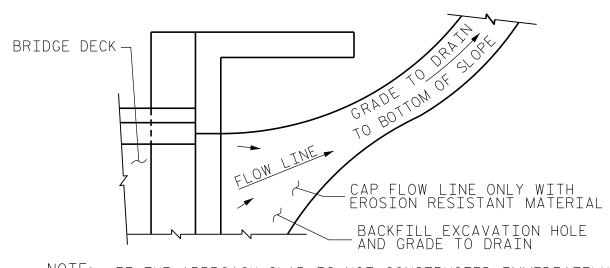


NOTE: IF THE APPROACH SLAB IS NOT CONSTRUCTED IMMEDIATELY AFTER THE BACKFILLING OF THE END BENT EXCAVATION, GRADE TO DRAIN TO THE BOTTOM OF THE SLOPE AND PROVIDE EROSION RESISTANT MATERIAL, SUCH AS FIBERGLASS ROVING OR AS DIRECTED BY THE ENGINEER TO PREVENT SOIL EROSION AND TO PROTECT THE AREA ADJACENT TO THE STRUCTURE. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THESE MATERIALS PRIOR TO CONSTRUCTION OF THE APPROACH SLAB.

TEMPORARY DRAINAGE PIPE, 12 INCHES IN DIAMETER.

PLAN VIEW

TEMPORARY DRAINAGE DETAIL

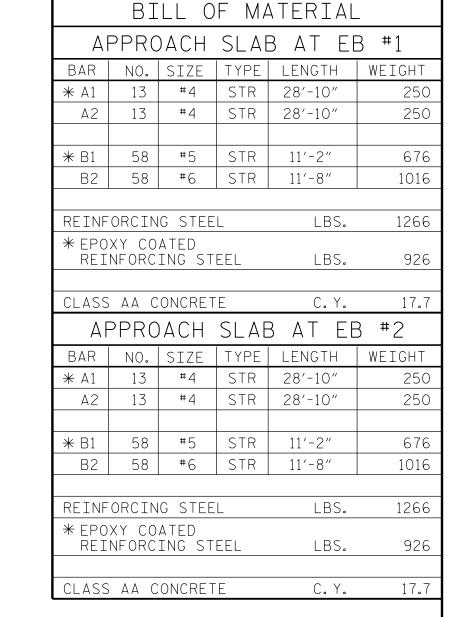

CLASS "B" STONE — FOR EROSION CONTROL ------\_\_\_\_\_ TEMP. SLOPE DRAIN -2'-0"MIN. EARTH S◀┐ SHOULDER DITCH TOE OF FILL-BLOCK -CLASS "B"STONE — FOR EROSION CONTROL APPROACH SLAB SECTION R-R 2′-0 MIN 3"EROSION RESISTANT MATERIAL OVER PIPE 12" MIN. — - EARTH DITCH BLOCK EROSION RESISTANT MATERIAL APPROACH NOTE: IMMEDIATELY AFTER THE CONSTRUCTION OF THE APPROACH SLAB, THE CONTRACTOR SHALL PROVIDE TEMPORARY BERM AND SLOPE DRAIN. CONTRACTOR SHALL GRADE TO PIPE INLET AND PROVIDE EROSION RESISTANT MATERIAL AS SHOWN. THE EROSION RESISTANT MATERIAL SHALL BE EITHER 1) ASPHALT 4'-0" MIN. ∠ FILL SLOPE PLANT MIX, TYPE 1 OR TYPE 2, MIN. 2" DEPTH, 2) EROSION CONTROL MAT, OR 3) CONCRETE, AS DIRECTED BY THE ENGINEER.
THE SLOPE DRAIN SHALL CONSIST OF A NON-PERFORATED SECTION S-S

TEMPORARY BERM AND SLOPE DRAIN DETAILS

(TO BE USED WHEN SHOULDER BERM GUTTER IS REQUIRED)

SPLICE LENGTHS BAR EPOXY SIZE COATED UNCOATED #5 2'-5" 2'-0" #6 | 3'-7" | 2'-5"

SECTION N-N

CURB DETAILS

BR-0118 PROJECT NO. NORTHAMPTON COUNTY

STATION: STA. 13+92.37 -L-



STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH

STANDARD

BRIDGE APPROACH SLAB FOR PRESTRESSED CONCRETE CORED SLAB UNIT (SUB-REGIONAL TIER)

90° SKEW

SHEET NO

S-13

TOTAL SHEETS

13

& ASSOCIATES 301 FAYETTEVILLE ST., SUITE 1500 OCUMENT NOT CONSIDERED RALEIGH, NC 27601 (919) 882-7839 FINAL UNLESS ALL NC FIRM LICENSE: C-1506 SIGNATURES COMPLETED

KISINGER CAMPO

REVISIONS DATE: DATE: BY: BY:

\_\_\_\_JACOB H.DUKE DATE: 12-2019

ASSEMBLED BY: FIDEL L.FLORES DATE: 12-2019

DRAWN BY : SHS/MAA 5-09 | REV. 12-17

CHECKED BY: BCH 5-09

CHECKED BY: OMAR M. KHALAFALLA DATE: 12-2019