
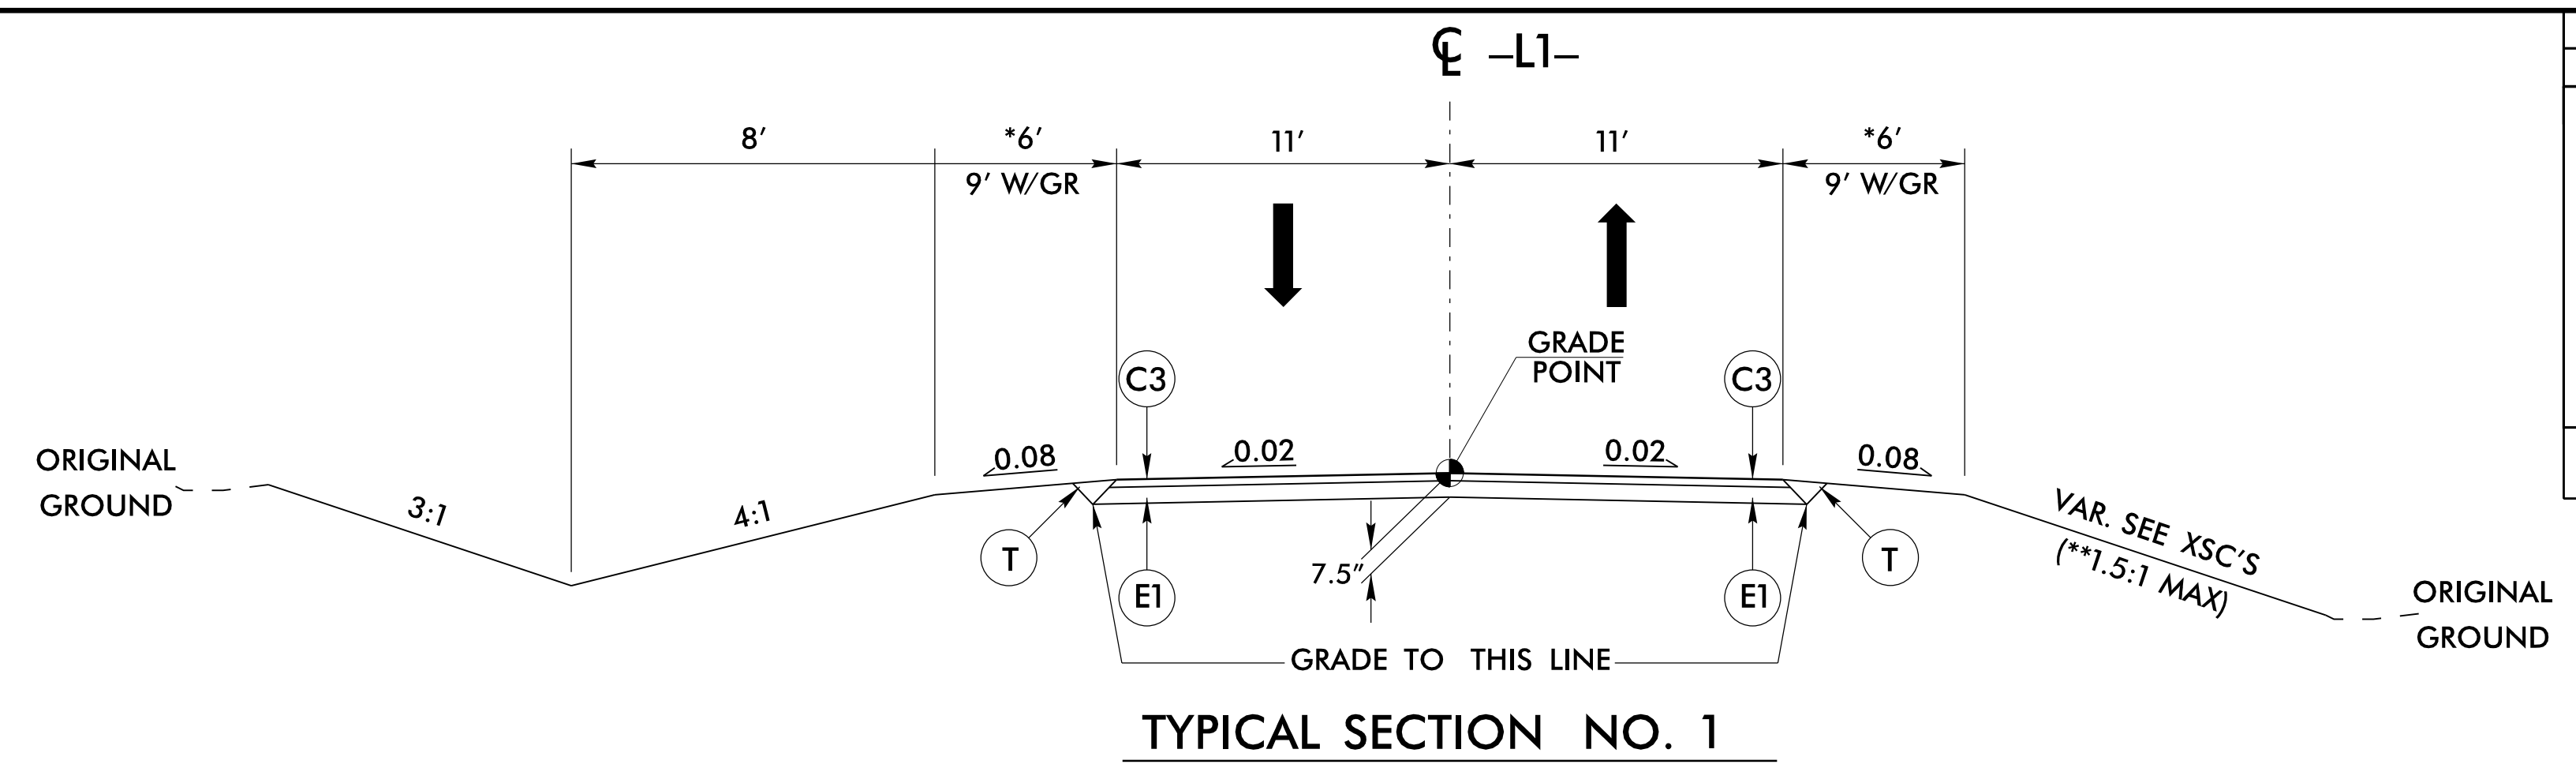
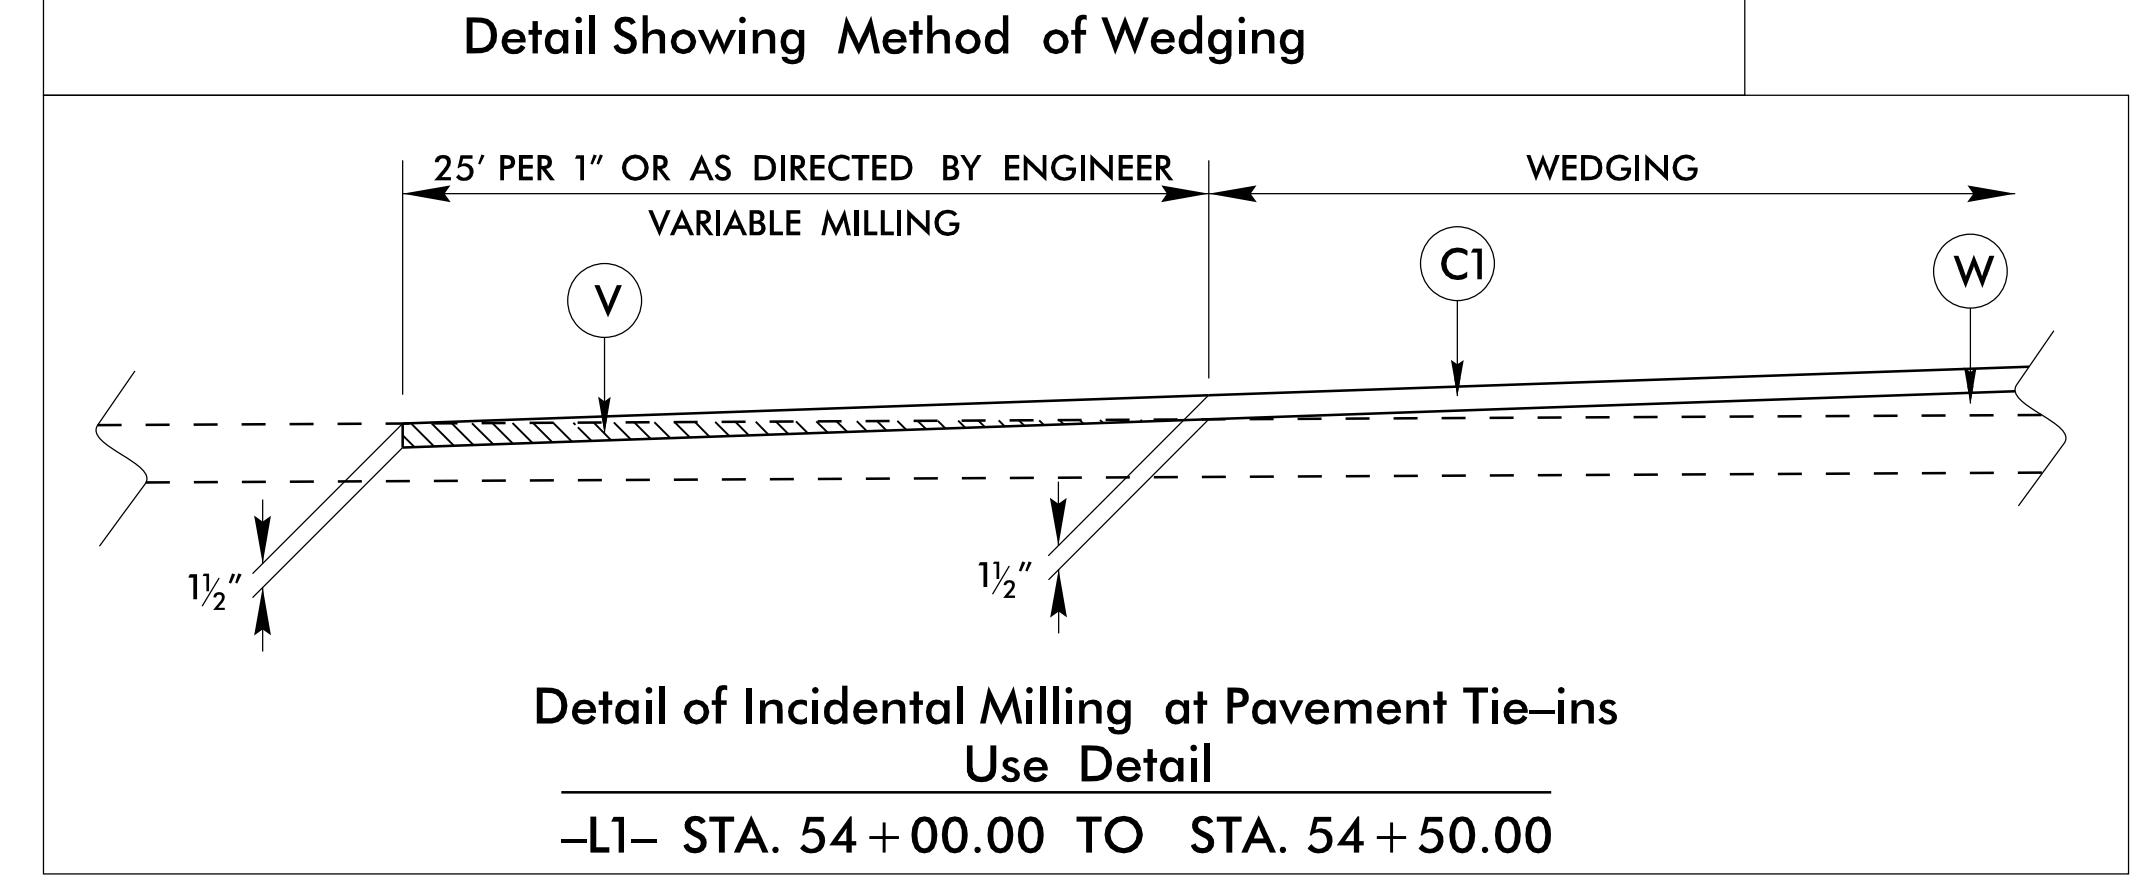


8/17/19


PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 2 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C4	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1 1/2" IN DEPTH.
E1	PROP. APPROX. 4 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 4" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	2 1/2" AGGREGATE BASE COURSE.
J2	PROP. 6" AGGREGATE BASE COURSE.
J3	PROP. 8" AGGREGATE BASE COURSE.
P	PRIME COAT AT THE RATE OF .35 GAL. PER SQ. YARD.
R1	PROP. SHOULDER BERM GUTTER
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	INCIDENTAL MILLING (SEE INCIDENTAL MILLING DETAIL SHEET 2A-1)
W	WEDGING (SEE WEDGING DETAIL SHEET 2A-1)

NOTE: ALL PAVEMENT SLOPES 1:1 UNLESS NOTED OTHERWISE

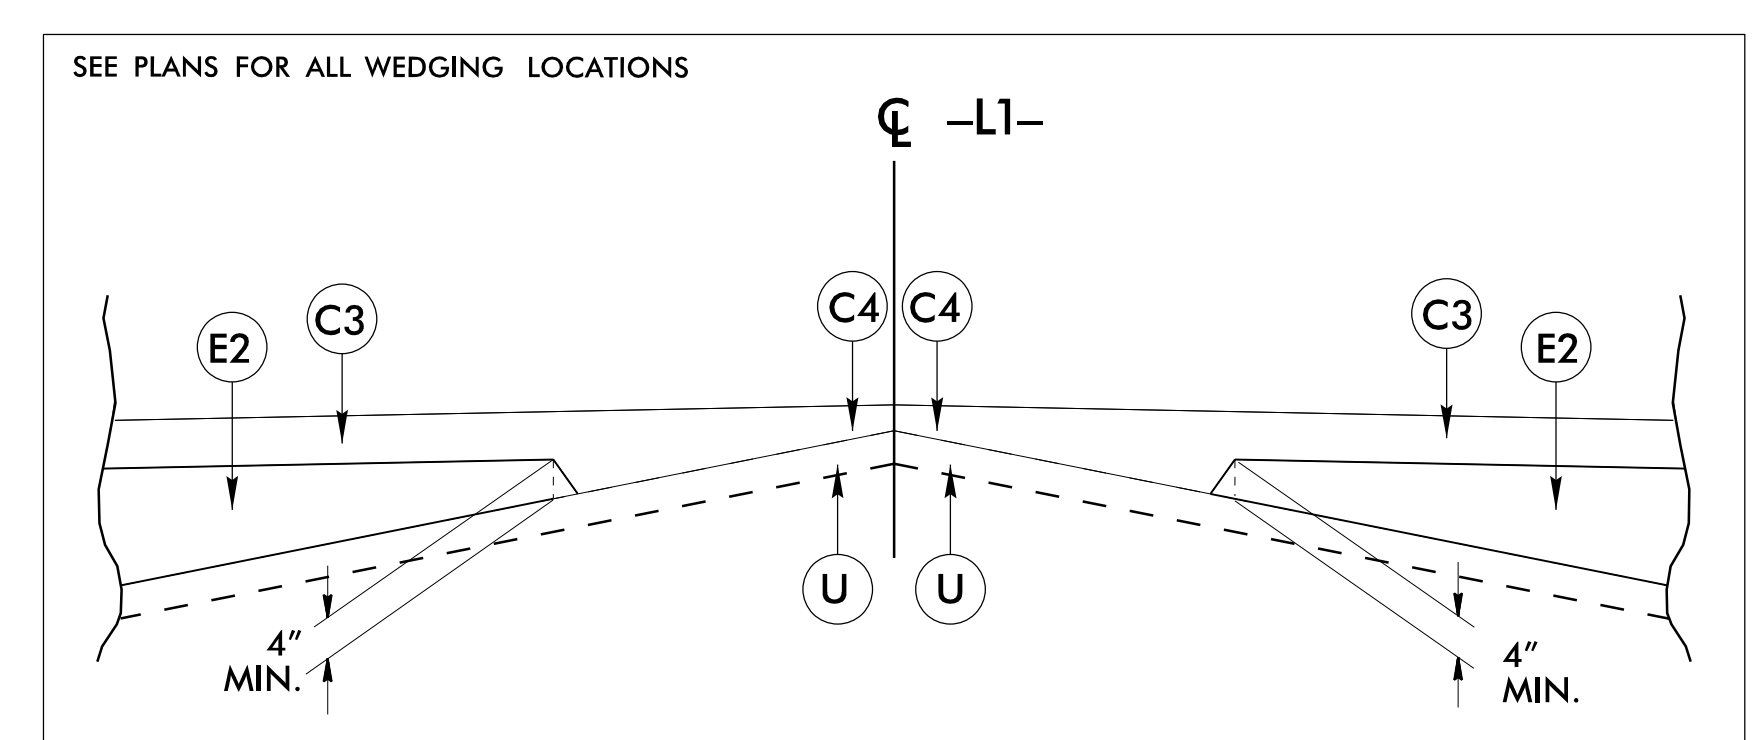


TYPICAL SECTION NO. 1

-L1- STA. 17+00.00 TO -L1- STA. 19+50.00  
 -L1- STA. 43+45.00 (END BRIDGE) TO -L1- STA. 51+89.00  
 \*VARIABLE WIDTH FULL DEPTH PAVED SHOULDER PROPOSED IN AREAS WITH GUARDRAIL ONLY - SEE PLANS  
 \*\*ROCK PLATING PROPOSED FOR ALL SLOPES STEEPER THAN 3:1

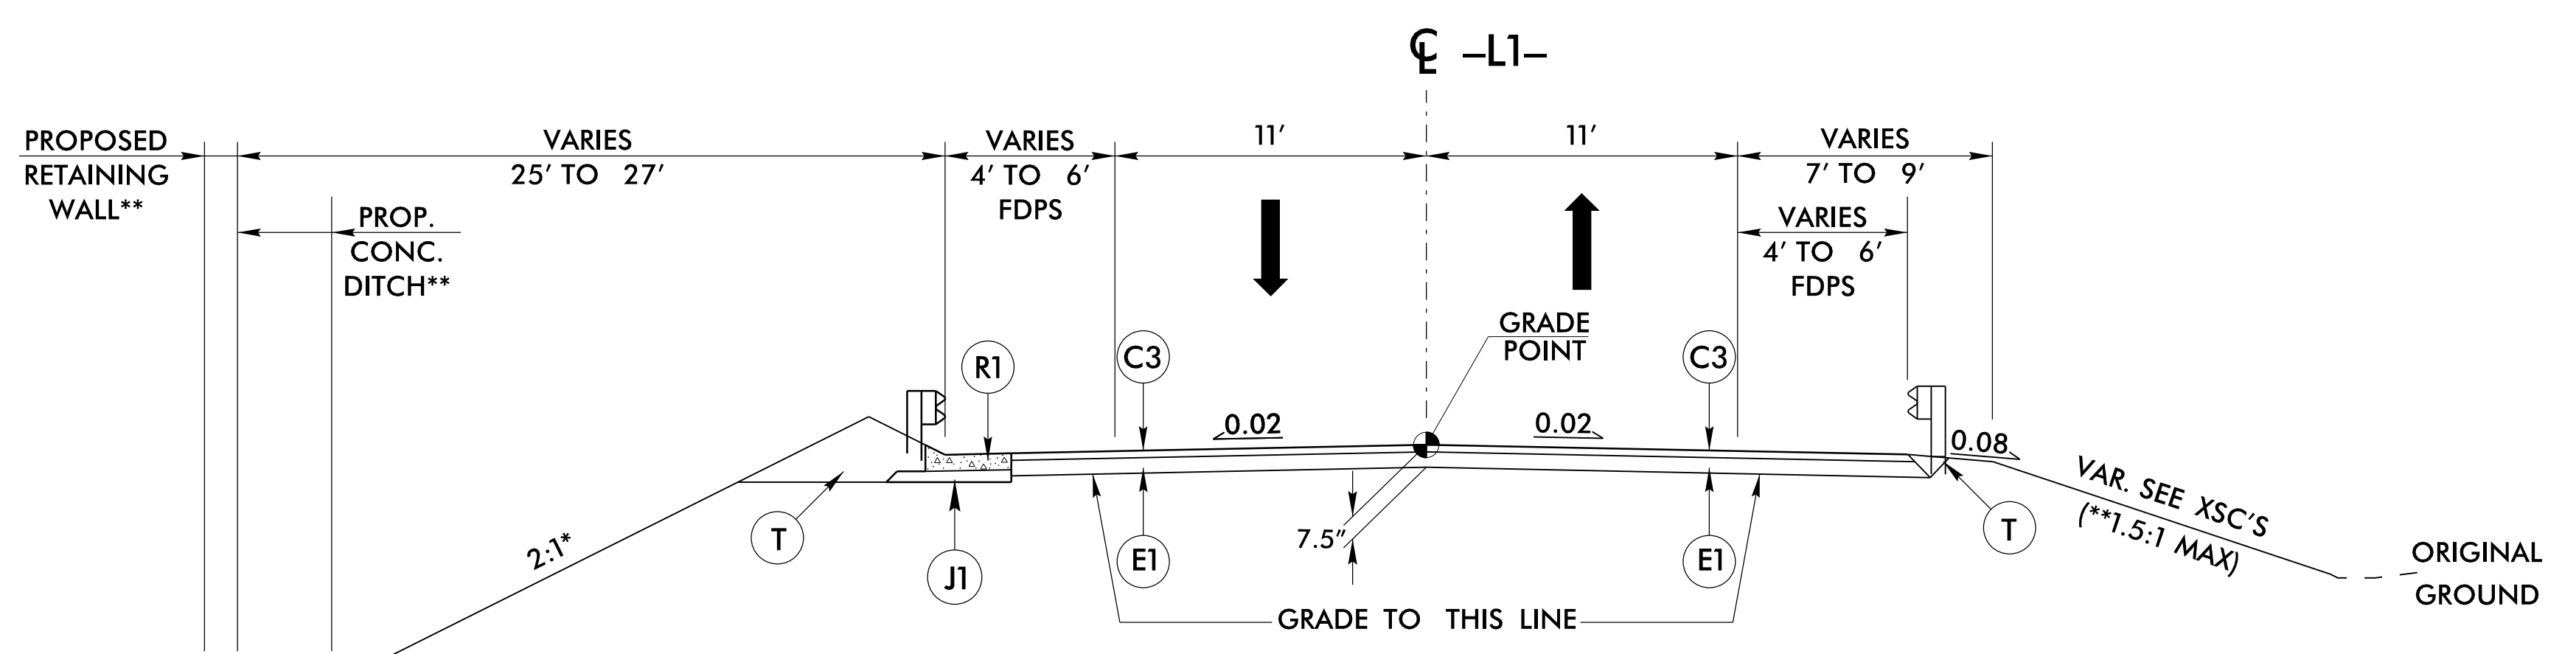


TYPICAL SECTION NO. 2

-L1- STA. 19+50.00 TO STA. 22+06.00 (BEGIN BRIDGE)  
 \*ROCK PLATING PROPOSED FOR ALL SLOPES STEEPER THAN 3:1  
 \*\* SEE SHEET W-1 FOR RETAINING WALL AND CONC. DITCH DETAILS

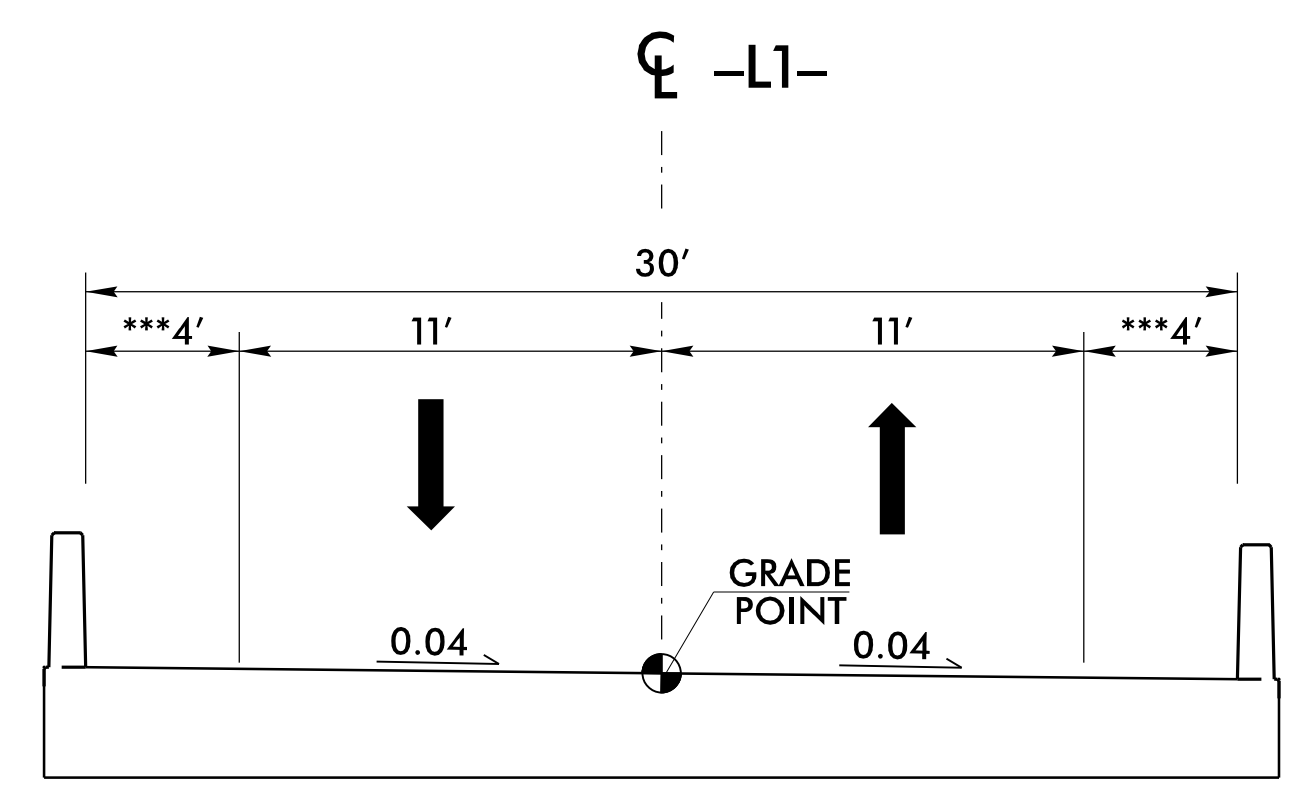

TYPICAL SECTION NO. 3

-L1- STA. 22+06.00 (BEGIN BRIDGE) TO  
 -L1- STA. 28+06.00 (END BRIDGE)  
 \*\*\*4' SHOULDER REQUIRED FOR SIGHT DISTANCE

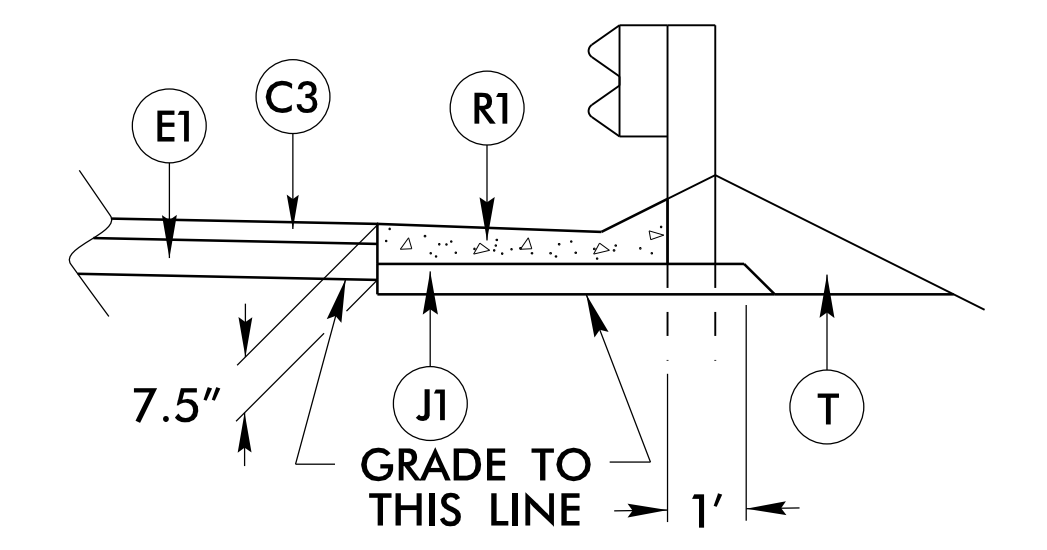

SHOULDER BERM GUTTER DETAIL

-L1- STA. 19+34.00 TO -L1- STA. 21+95.00 LT  
 -L1- STA. 20+49.00 TO -L1- STA. 21+95.00 RT  
 -L1- STA. 28+15.00 TO -L1- STA. 34+11.00 LT  
 -L1- STA. 28+19.00 TO -L1- STA. 29+74.00 RT  
 -L1- STA. 36+95.00 TO -L1- STA. 39+34.00 LT  
 -L1- STA. 43+56.00 TO -L1- STA. 43+72.00 LT

PROJECT REFERENCE NO. B-4484	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER PROFESSIONAL SEAL 030952 WINNER D. FRANK 3/27/2020	PAVEMENT DESIGN ENGINEER PROFESSIONAL SEAL 027886 CLARK S. MORRISON 3/27/2020
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	



18-MAR-2020 10:35  
 P:\Projects\2020\B4484\RDY\_tjup.dgn  
 \$\$\$\$DISCLAIMER\$\$\$\$